

# Photoelectrics, Fibre Optic Sensor Plastic Fibres Type PD 60 CNX 20 BP ..

CARLO GAVAZZI



- Range: Fibre dependent
  - Diffuse Reflective typ. 80 mm
  - Through Beam typ. 200 mm
- Manual distance set-up by keyboard +/-
- Sensitivity bar graph LEDs
- Microprocessor controlled and EEPROM parameter storage
- Operational voltage 10 - 30 V DC
- Output 100 mA, NPN and PNP
- Light or dark switching selectable
- IP65 protection



## Product Description

The PD60CNX20BP. is a fibre optic amplifier made specific for plastic fibres. The sensor is microprocessor based and has a manual distance set-up by keyboard. NO or NC (light or dark mode) output are selectable by wiring. The sensor output is build as a Push-pull output that performs both a NPN and PNP output which are fully protected against short-circuit, transients and

wrong polarity. The sensor is build in a strong 13 x 30 x 60 mm polycarbonate housing for DIN-rail mounting. The sensors are suitable for applications that require little space and high accuracy such as: Small part detection, tight locations, checking parts, counting, precise part positioning, material handling and assembly and robotics

## Ordering Key

**PD 60 CNX 20 BP M5**

Type	_____
Housing style	_____
Housing size	_____
Housing material	_____
Not used	_____
Plastic fibres	_____
Sensing distance cm	_____
Output type	_____
Output configuration	_____
Connection type	_____

## Type Selection

Housing W x H x D	Range S <sub>n</sub> (Fibre dependent)	Ordering no. NPN and PNP cable Make or break switching	Ordering no. NPN and PNP plug Make or break switching
13 x 30 x 60 mm	80 mm diffuse mode 200 mm through beam mode	<b>PD 60 CNX 20 BP</b>	<b>PD 60 CNX 20 BP M5</b>

## Specifications

<b>Rated operating distance (S<sub>n</sub>)</b> Diffuse mode Through beam mode	See optical fibre table Up to 80 mm Up to 200 mm	<b>Voltage drop (U<sub>d</sub>)</b> I <sub>L</sub> = 100 mA I <sub>L</sub> = 10 mA	≤ 2 VDC ≤ 1 VDC
<b>Sensitivity</b> Manual distance setup	Sensitivity increase or decrease by pressing + or - keyboard	<b>Remote input</b> ON OFF	≤ 1.4 VDC ≥ 3.0 VDC
<b>Temperature drift</b>	< 0,4%/°C	<b>Protection</b>	Short-circuit, reverse polarity, transients
<b>Hysteresis (H)</b> Differential travel	≤ 5%	<b>Light source</b>	GaAlAs, LED 660 nm
<b>Rated operational volt. (U<sub>B</sub>)</b>	10 to 30 VDC (ripple included)	<b>Light type</b>	Red modulated
<b>Ripple (U<sub>rpp</sub>)</b>	≤ 10%	<b>Ambient light</b> Incandescent light Sunlight	10'000 Lux 20'000 Lux
<b>Output current</b> Continuous (I <sub>a</sub> ) Short-time (I)	100 mA 100 mA	<b>Operating frequency</b>	1 KHz
<b>No load supply current (I<sub>o</sub>)</b>	≤ 40 mA	<b>Response time</b> OFF-ON (t <sub>ON</sub> ) ON-OFF (t <sub>OFF</sub> )	≤ 500 μs ≤ 500 μs
		<b>Power ON delay (t<sub>v</sub>)</b>	≤ 300 ms




## Specifications (cont.)



<b>Output function</b> NPN and PNP Make or break	Available (Push-Pull output) Programming by wiring	<b>Vibration</b>	10 to 150 Hz, 0.5 mm/7.5 g (IEC60068-2-6)
<b>Indication function</b> Output Sensitivity	Green LED Bar graph, red	<b>Shock</b>	2 x 1 m & 100 x 0.5 m (IEC 60068-2-6, 60068-2-32)
<b>Environment</b> Installation category Pollution degree Degree of protection	II (IEC 60664/60664A;60947-1) 3 (IEC 60664/60664A;60947-1) IP 65 (IEC 60529; 60947-1)	<b>Rated insulation voltage</b>	50 VAC (rms)
<b>Temperature</b> Operating Storage	0° to +60°C (32° to +140°F) -20Y to +80YC (-4° to +176°F)	<b>Housing material</b> Body	Polycarbonate
		<b>Connection</b> Cable Plug Cables for plug (M5)	PVC, grey, 2 m, 4 x 0,25 mm <sup>2</sup> NPB, M8 x 1 CONG5A-series
		<b>Weight</b>	24 g
		<b>Approvals</b>	cUL
		<b>CE-marking</b>	Yes

## Operation Diagram

$t_v$  = Power ON delay

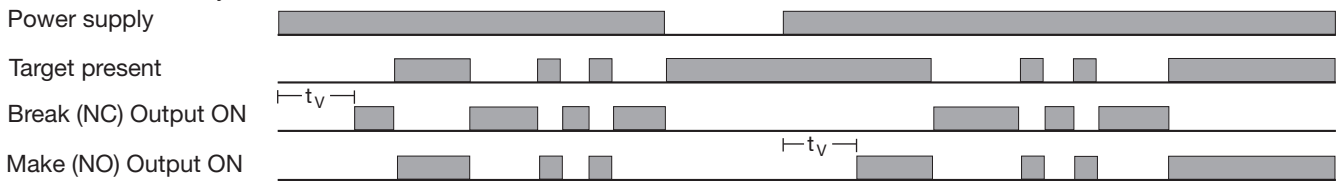


## Dimensions

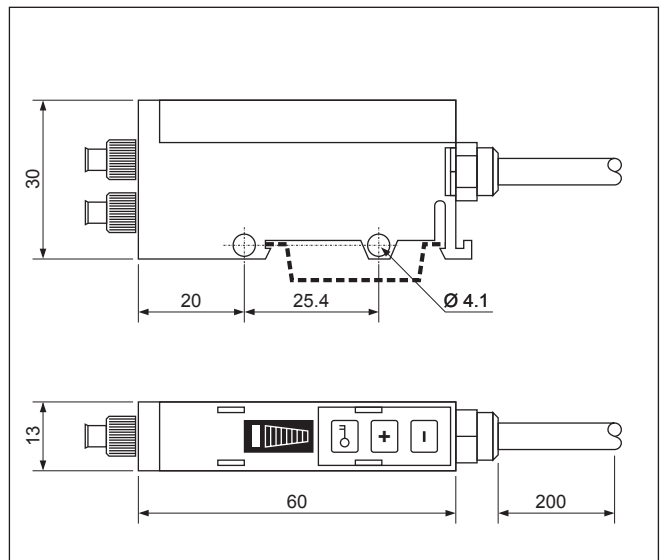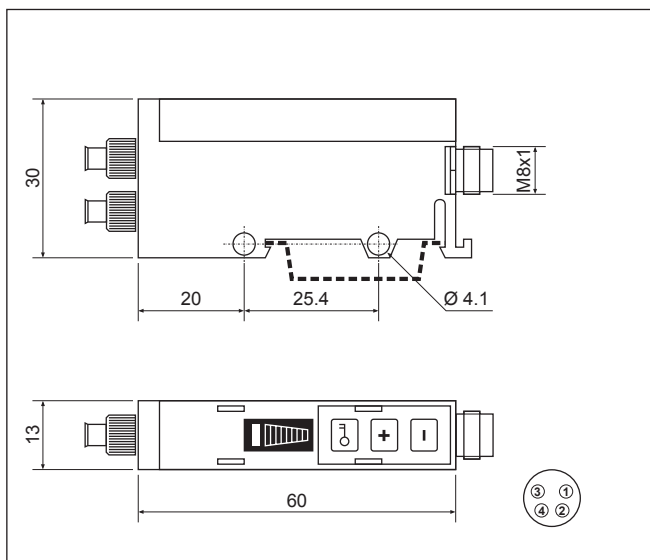




## Programming Functions

**Keyboard**  
Unlock

Press  for 3 sec.


until the bar graph stops flashing

Lock


Press  for 3 sec.

until the bar graph stops flashing


**Sensitivity adjustment**  
To increase

Press  step by step


or continuous action.

 Upper LED will flash (2 sec.) when maximum sensitivity is reached.


To decrease

Press  step by step


or continuous action

 Lower LED will flash (2 sec.) when minimum sensitivity is reached





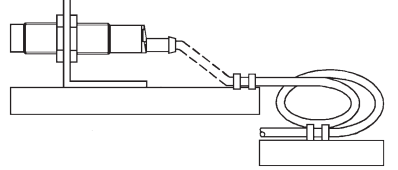
## Wiring Diagram

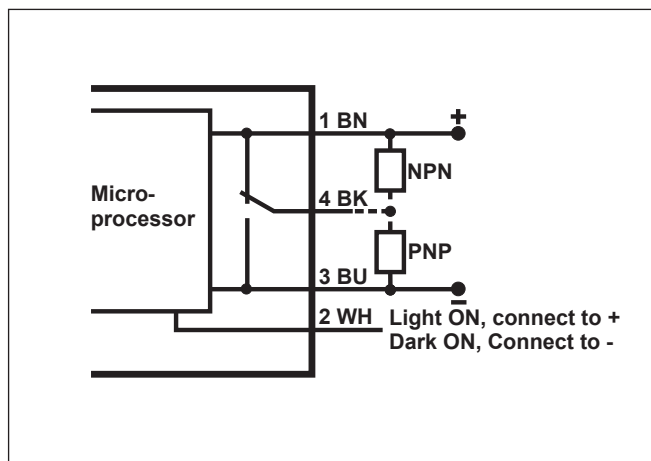

## Keyboard and LED

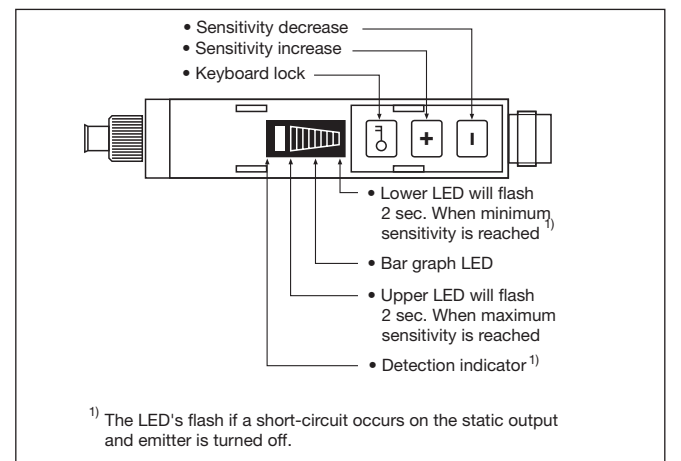

## Installation Hints

<p>To avoid interference from inductive voltage/current peaks, separate the prox. switch power cables from any other power cables, e.g. motor, contactor or solenoid cables</p> 	<p>Relief of cable strain</p> <p>Incorrect</p>  <p>Correct</p>  <p>The cable should not be pulled</p>	<p>Protection of the sensing face</p>  <p>A proximity switch should not serve as mechanical stop</p>	<p>Switch mounted on mobile carrier</p>  <p>Any repetitive flexing of the cable should be avoided</p>
---	---	--	--

## Delivery Contents

- Photoelectric switch: PD60CNX20BP..
- Installation instruction
- **Packaging:** Cardboard box

## Accessories

- Plastic fibres type FPD.., FPT..
- Connector type: CONG5A../CON.54NF