
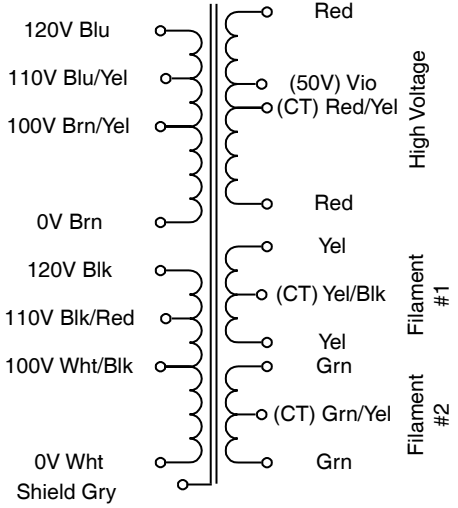



# "Classic" Plate & Filament - Potted (300P Series)

Power

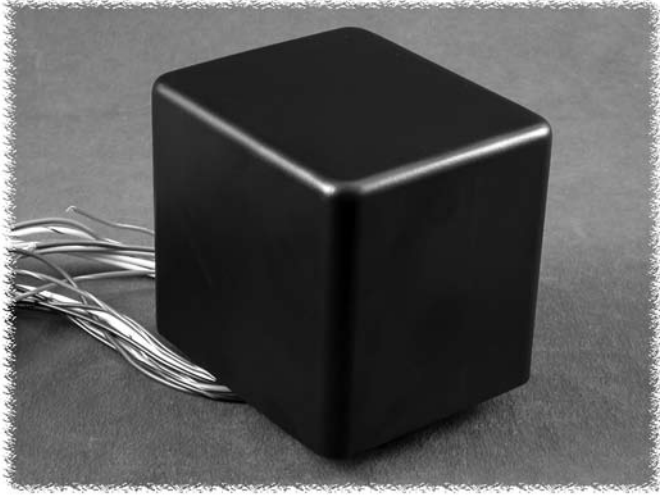

## "CLASSIC" PLATE & FILAMENT - POTTED UNIVERSAL PRIMARY POWER TRANSFORMERS

- Enclosed in a drawn steel case, the transformer is completely potted in epoxy.
- Perfect match for our potted output transformers and potted chokes.
- Primary: Universal - 100, 110, 120, 200, 220, 240 VAC 50/60 Hz.
- Bias Tap: 50 VAC tap from high voltage secondary C.T.
- Highpot tested: 2,000 VAC
- C UL US recognized E207860
- Finish: Black powder paint to match our 1650P series of output transformers
- Windings: Concentric wound for low stray field and low noise
- For a more economical, open frame, universal primary - see our "300" series.

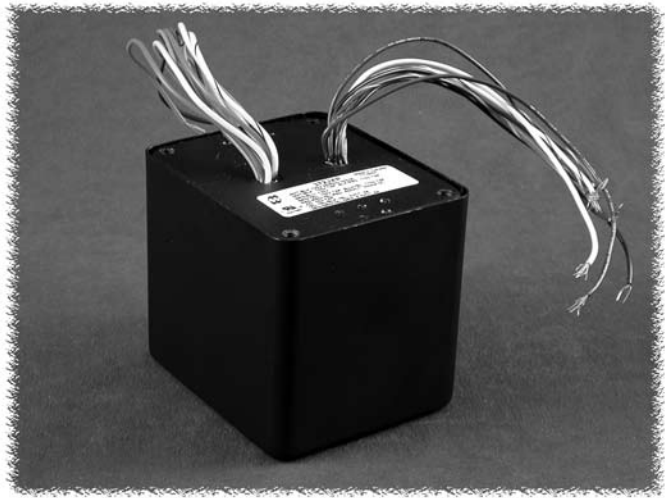

**CANADA**  
 Guelph, Ontario (519) 822-2960  
 St. Laurent, Quebec (514) 343-9010  
**USA**  
 Cheektowaga, NY (716) 630-7030

[www.hammondmfg.com](http://www.hammondmfg.com)




**EUROPE**  
 Basingstoke, UK 01256 812812

**AUSTRALIA**  
 Queenstown, Australia 61-8-8240-2244

# "Classic" Plate & Filament - Potted (300P Series)

Power

Part Number	Total Power (VA)	A.C. High Voltage Secondary R.M.S.	Bias Tap (VAC)	Filament #1 (VAC)	Filament #2 (VAC)	Mtg. Style
<b>369AXP</b>	40	250V C.T. @ 115ma.	50	6.3V C.T. @ 2A	-	1
<b>370XP</b>	41	480V C.T. @ 46ma.	50	5V C.T. @ 2A	6.3V C.T. @ 1.5A	1
<b>369GXP</b>	50	450V C.T. @ 74ma.	50	6.3V C.T. @ 2.5A	-	1
<b>369JXP</b>	50	500V C.T. @ 69ma.	50	6.3V C.T. @ 2.5A	-	1
<b>370CAXP</b>	66	500V C.T. @ 81ma.	50	5V C.T. @ 2A	6.3V C.T. @ 2.5A	1
<b>370DAXP</b>	76	520V C.T. @ 104ma.	50	6.3V C.T. @ 3.5A	-	1
<b>370DXP</b>	86	550V C.T. @ 104ma.	50	5V C.T. @ 2A	6.3V C.T. @ 3A	1
<b>370EXP</b>	119	550V C.T. @ 144ma.	50	5V C.T. @ 3A	6.3V C.T. @ 4A	1
<b>370FXP</b>	141	550V C.T. @ 173ma.	50	5V C.T. @ 3A	6.3V C.T. @ 5A	2
<b>370HXP</b>	180	550V C.T. @ 230ma.	50	5V C.T. @ 3A	6.3V C.T. @ 6A	2
<b>372FXP</b>	150	600V C.T. @ 173ma.	50	5V C.T. @ 3A	6.3V C.T. @ 5A	2
<b>372HXP</b>	191	600V C.T. @ 230ma.	50	5V C.T. @ 3A	6.3V C.T. @ 6A	2
<b>372JXP</b>	243	600V C.T. @ 288ma.	50	5V C.T. @ 4A	6.3V C.T. @ 8A	2
<b>372XP</b>	75	620V C.T. @ 81ma.	50	5V C.T. @ 2A	6.3V C.T. @ 2.4A	1
<b>376XP</b>	157	640V C.T. @ 173ma.	50	5V C.T. @ 3A	6.3V C.T. @ 5A	2
<b>373XP</b>	125	700V C.T. @ 127ma.	50	5V C.T. @ 2A	6.3V C.T. @ 4A	1
<b>374AXP</b>	136	720V C.T. @ 138ma.	50	5V C.T. @ 3A	6.3V C.T. @ 3.5A	1
<b>374XP</b>	141	750V C.T. @ 127ma.	50	5V C.T. @ 3A	6.3V C.T. @ 5A	2
<b>374BXP</b>	200	750V C.T. @ 201ma.	50	5V C.T. @ 3A	6.3V C.T. @ 6A	2
<b>375XP</b>	171	800V C.T. @ 155ma.	50	5V C.T. @ 3A	6.3V C.T. @ 5A	2

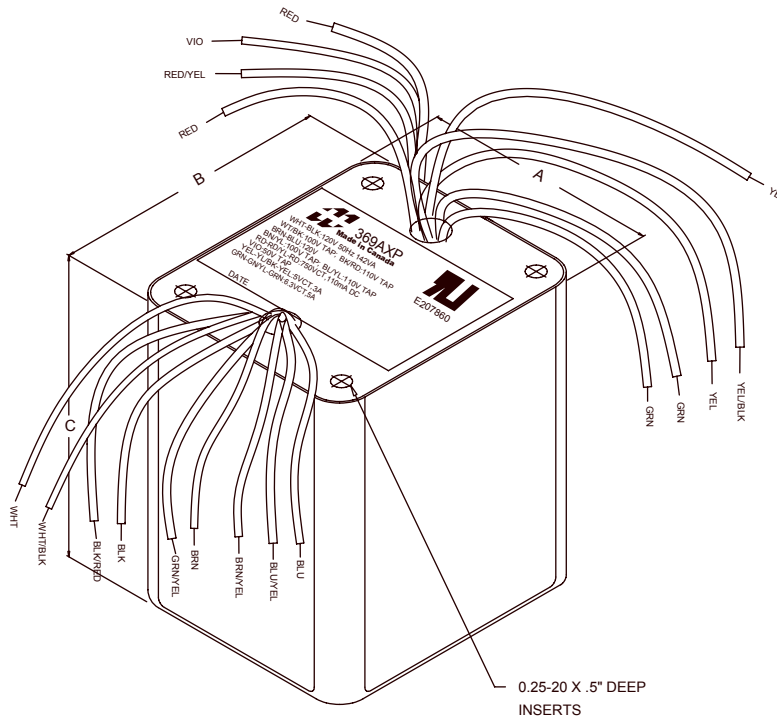

Mtg. Style	Dimensions (Inches)			Mounting - Threaded Insert
	A	B	C	
1	3.31	3.88	4.25	1/4 - 20
2	4.25	5.00	5.44	1/4 - 20

## EUROPE

Basingstoke, UK 01256 812812

## AUSTRALIA

Queenstown, Australia 61-8-8240-2244

[www.hammondmfg.com](http://www.hammondmfg.com)



## CANADA

Guelph, Ontario (519) 822-2960  
St. Laurent, Quebec (514) 343-9010

## USA

Cheektowaga, NY (716) 630-7030

