
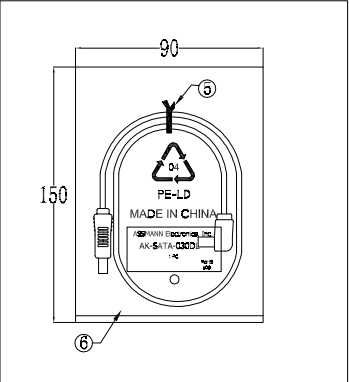


Electrical test:
 1. 100% short ,open,miswire test
 2. Conduct resistance: 2Ω max.
 3. Insulation resistance: 5MΩ min.
 4. Dielectric test : DC 300V

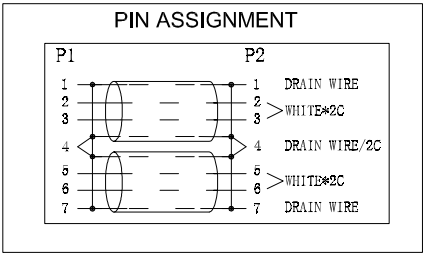

WSW order code	Cable Length
AK-SATA-030DL	0.30 Meter
AK-SATA-050DL	0.50 Meter
AK-SATA-075DL	0.75 Meter

NO.	NAME	QTY	SPECIFICATION
⑥	PE BAG	1	CLEAR PE BAG SIZE: 90*150*0.05mm PRINT BLACK"MADE IN CHINA"+ "1PCS"
⑤	TIE	1	WHITE L=60mm
④	IN JACKET	0.5g	CLEAR LD-PE
③	OUT JACKET	3.0g	PVC 45P COLOR BLACK
②	CABLE	1	UT.2725 [26AWG (1/0.404)*2+D(1/0.32)*2+AL]*2F OD2.2*7.8mm JACKET RED (200C/RD-16#)
①	CONN	2	SERIAL ATA FEMALE 7PIN CONNECTOR:CRIMP TYPE PIN:G/F INSULATOR:BLACK

RoHS compliant
Unit: mm

Scale	FREE				Date	Name	Customer-No.
TOLERANCE					Drawn	Winnie	ASSMANN WSW-No. AK-SATA-xxxDL
					Approved	Winnie	
DIM	TOL						Drawing-No.
							ASS 7253 CA
Angle	TOL	①	Drawn	24.10.2014	Winnie		rev00
		Id.	Modification	Date	Name	Replace	Sheet

