

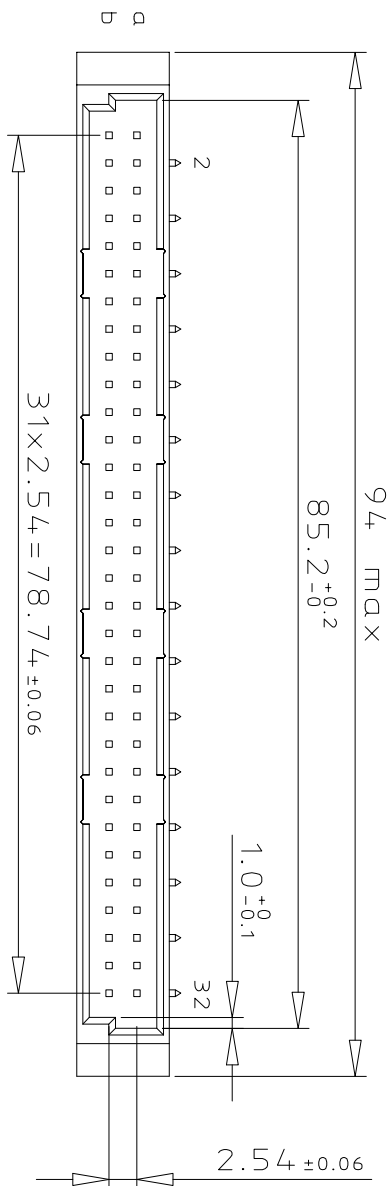


# DIMENSIONS

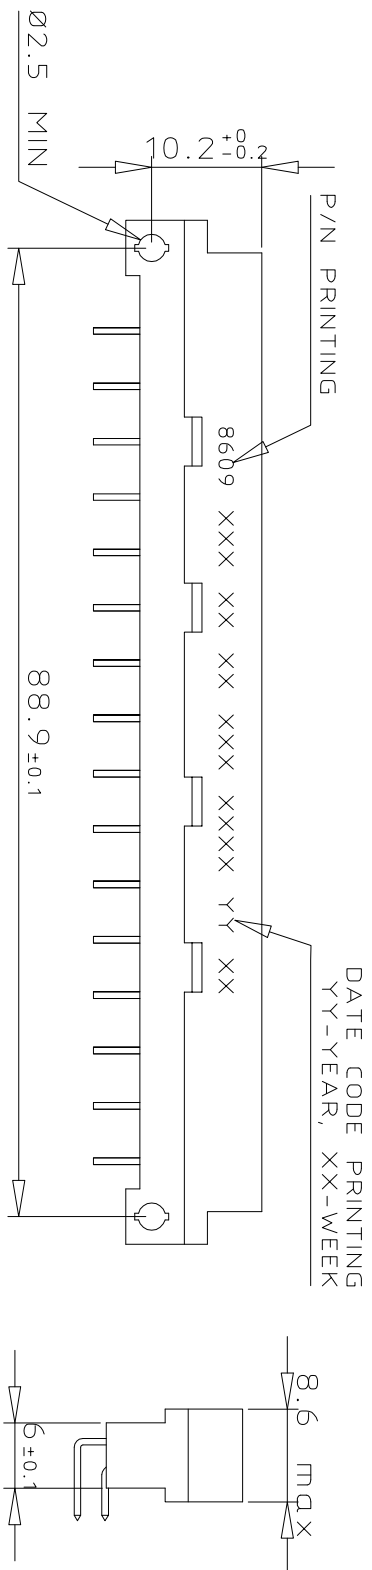

# TERMINATION

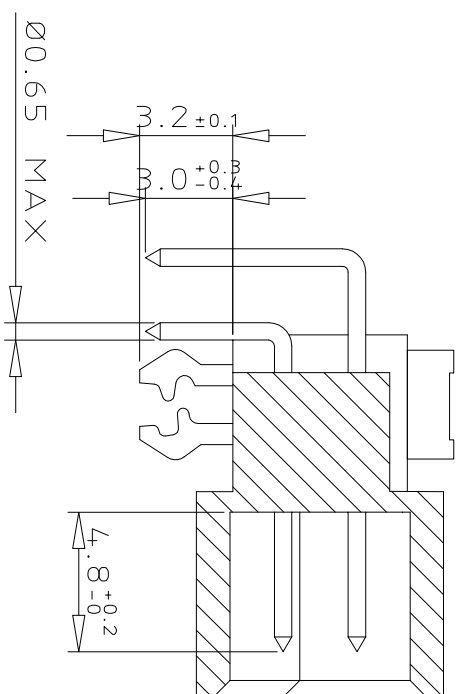


SERIES	8609	2	32	5	1	13	7	4	8	ELF
ROWS FITTED WITH CONTACTS										
ROW a	-	-	-	-	-	-	-	-	-	16
ROW b	-	-	-	-	-	-	-	-	-	32
NO. OF CONTACTS										

# ORDERING INFORMATION

TYPE OF INSULATOR	2	ROW MALE INSULATOR	5
METHOD OF MOUNTING	1	STANDARD MOUNTING - STYLE B	1
TERMINATION	1	ANGLED SPILL	13
OPTIONS	7	NO OPTION WITH HARPOONS	7
PERFORMANCE CLASS	4	DIN 41612 CLASS 3	4
	5	DIN 41612 CLASS 2	5
	6	DIN 41612 CLASS 1	6
	8	AS PER MIL C 55302 / JSS 50808	8
PITCH PER ROW	8	5.08 mm EVEN LOADING	8
LEAD FREE VERSION	8		8

# PCB LAYOUT

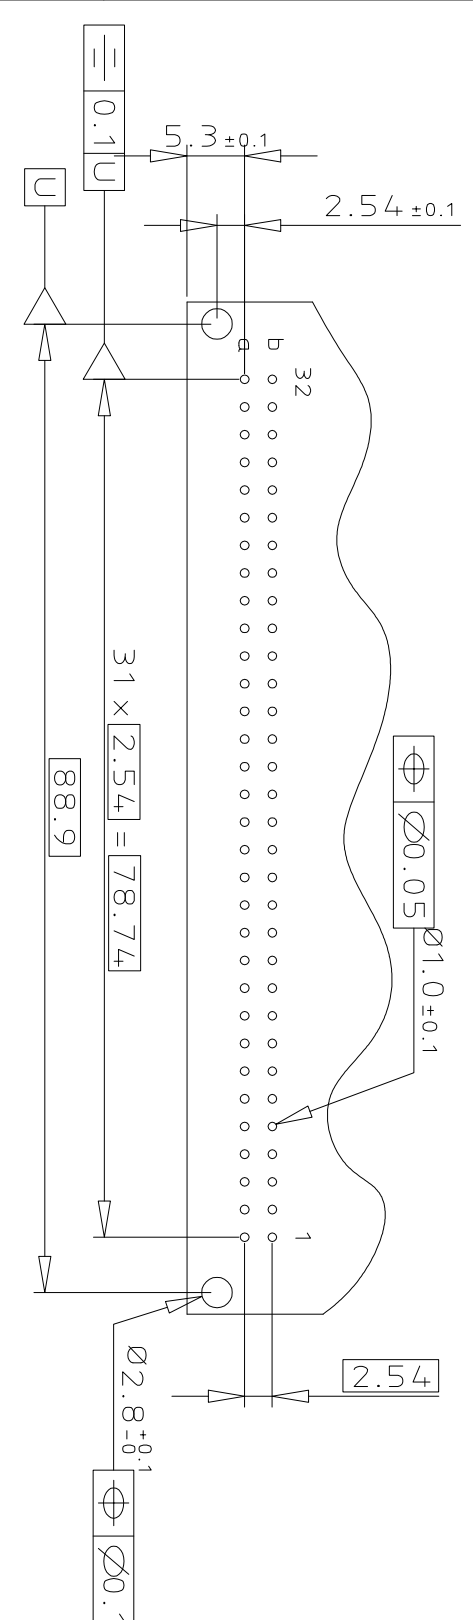

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	SEE DWG C-8609-0000A	surface	ISO 1302	tolerance	ISO 406 ISO 1101	projection	mm	product family	8609
tr	ecn no dr	date	tolerances unless otherwise specified	0.X	±0.1			title	DIN STANDARD HEADER
A	105-0107	MINI 2005-05-19	angles	0.XX	±0.1			ANGLED SPILL DIN 41612 STYLE B	
B	106-0084	MINI 2006-06-01	linear	0.XXX	±0.1			dwg no	C-8609-2079
C	108-0146	KR 2008-10-21	0°±2°					sheet 1 of 1	A3
			dr	MINI K V	2005-05-19			type	Product Customer Drawing
			engr	RAKHEE G	2005-05-19			size	
			chr	KESAVAN R	2008-10-21				
			pppd	KESAVAN R	2008-10-21				
sheet index	revision	sheet	1						