



actual size

Automotive SMD Crystal · JTX310

SMD Tuning Fork Crystal · 3.2 x 1.5 mm

- all versions are AEC-Q200 qualified
- optional extra shock proof versions available
- reflow soldering temperature: 260 °C max.
- package height 0.9 mm max.



General Data

type	JTX310
frequency	32.768 kHz
frequency tolerance at 25 °C ± 5 °C	± 20 ppm / ± 30 ppm
load capacitance C_L	12.5 pF std. (7 pF, 9 pF ask)
temperature constant (T_C)	$T_C = -0.04 \cdot 10^{-6} / ^\circ\text{C}^2$ max. $T_C = -0.034 \cdot 10^{-6} / ^\circ\text{C}^2$ typical
frequency temperature characteristic	f (ppm) = $T_C \cdot (25^\circ\text{C} - T)^2$ T = requested temperature
operating temperature range	refer to frequency stability table
shunt capacitance C_0	1.15 pF typical
series resistance max. (ESR)	70 k Ω (80 k Ω for temperature range T2 and T3)
storage temperature	-55 °C ~ +125 °C
drive level max.	0.5 μ W
aging first year	< ± 3 ppm

Frequency Stability vs. Temperature

		-80 ppm	-160 ppm	-250 ppm	-400 ppm
-20 °C ~ +70 °C	STD.	●			
-40 °C ~ +85 °C	T1		●		
-40 °C ~ +105 °C	T2			○	
-40 °C ~ +125 °C	T3				○

● standard ○ available

Marking


company code
date code / production code

Mechanical Endurance Options

AEC (according AEC-Q200): 100 g, half sine pulse, 6.0 ms
HMR (high mechanical reliability): 3000 g, half sine pulse, 0.3 ms

note: all versions are AEC-Q200 qualified

Dimensions

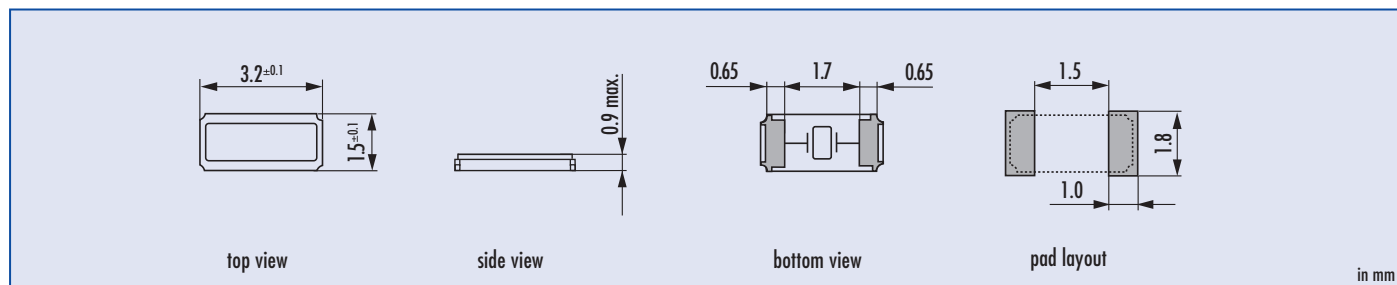

Order Information

Q	frequency	type	load capacitance	stability at 25 °C	option 1	option 2
Quartz	0.032768 MHz	JTX310	12.5 pF 7 pF, 9 pF (ask)	20 = ± 20 ppm 30 = ± 30 ppm	blank = -20 °C ~ +70 °C T1 = -40 °C ~ +85 °C T2 = -40 °C ~ +105 °C T3 = -40 °C ~ +125 °C	AEC = AEC-Q200 qualified HMR = high mechanical reliability

Example: Q 0.032768-JTX310-12.5-20-T1-AEC-LF (Suffix LF = RoHS compliant / Pb free pads)

