

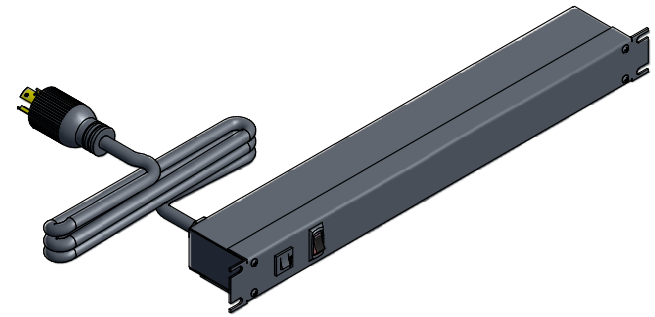



ASSEMBLY - VIEW FROM FRONT

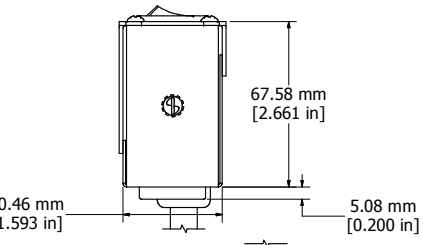


ISOMETRIC VIEW

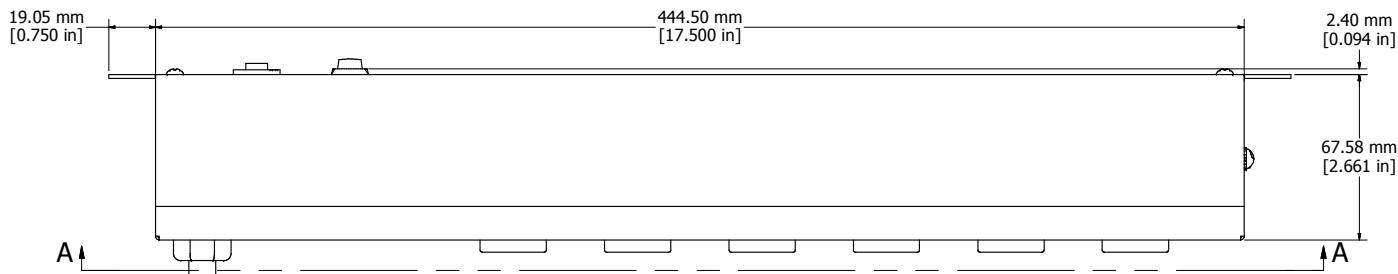

ASSEMBLY - VIEW FROM SIDE

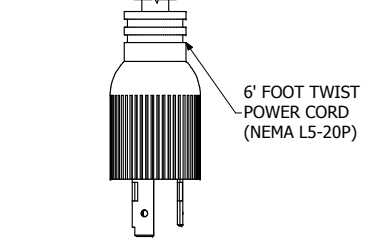

ASSEMBLY - VIEW FROM BOTTOM

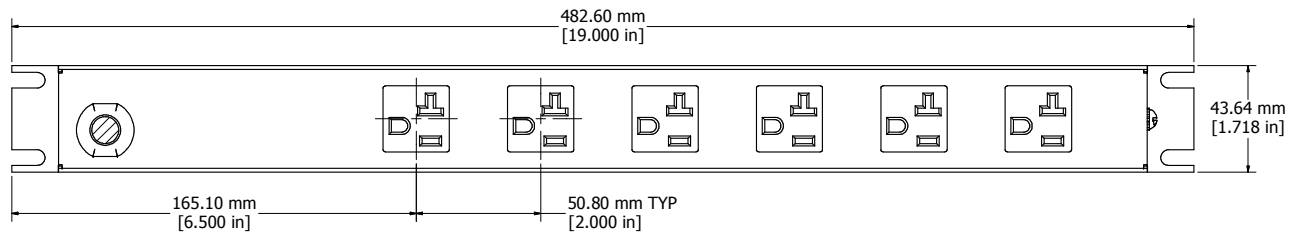

SECTION A-A

1589H6C1BKRR
Finish - Front - Black Painted Steel
Back - Black Painted Steel
Rated - 125 VAC, 60 Hz, 20 Amps
Approvals - CSA Certified Standards C22.2 (No. 21-95, 42-99)
- UL Recognized Standard UL1363
Cord Length
1589H6C1BKRR - 6' Foot Twist Power Cord (NEMA L5-20P)
1589H6D1BKRR - 15' Foot Twist Power Cord (NEMA L5-20P)

