
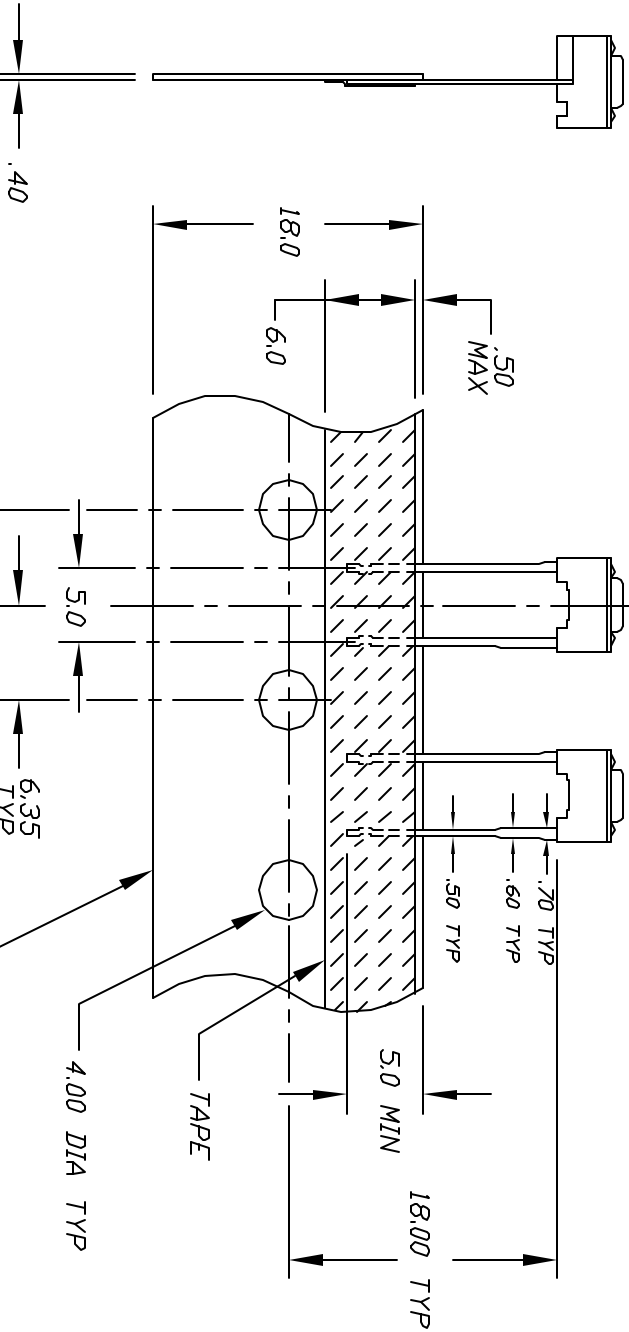


RECOMMENDED PCB LAYOUT



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0 = ±0.4  
0.00 = ±0.25
3. RATING: 50mA @ 12VDC
4. OPERATING FORCE: 260±50gf
5. TRAVEL: 0.25 +0.2/-0.1mm
6. CONTACT RESISTANCE: 100 milli-ohm max.
7. ELECTRICAL LIFE: 100,000 cycles
8. CARRIER IS FOLDED EVERY 25 PITCHES  
(24 SWITCHES PER FOLD)
9. 1,000 SWITCHES PER BOX

REV.	ECN No.	DESCRIPTION	DATE	CHKD
A	10743	RELEASED FOR PRODUCTION	7/10/00	MM

TITLE	SCALE	DATE	DR	DWG	REV
TL 59 F260 Q	2:1	7/10/00	MM	P010584	A

**E-SWITCH®**

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED