
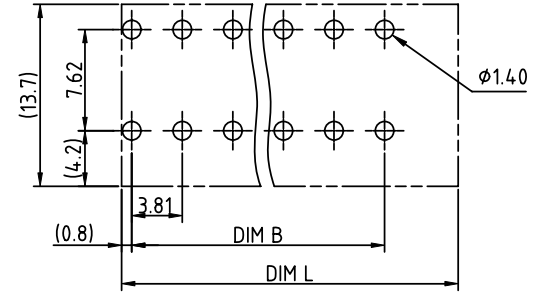
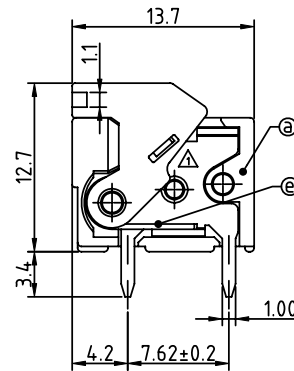
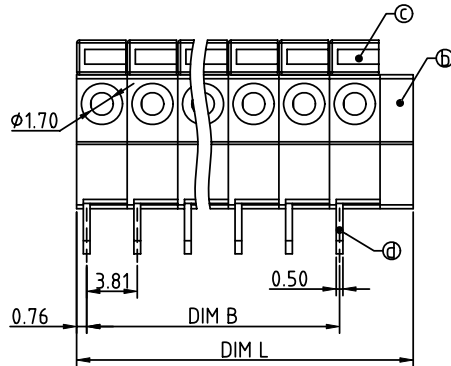


PRODUCT NUMBER	PITCH
HAxx71x000J0G	3.81 mm



RECOMMENDED P.C.B LAYOUT  
TOP VIEW

Material:

- Item ① Terminal body Thermoplastic ( UL94V-0 )
- Item ② Terminal cover Thermoplastic ( UL94V-0 )
- Item ③ Terminal lever Thermoplastic ( UL94V-0 ) Orange(RAL2011/P)
- Item ④ Solder pin Brass, Tin plated
- Item ⑤ Spring clamp Stainless steel

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 6A
- Solid wire(AWG): 16-26
- Stranded wire(AWG): 16-26
- Wire strip length: 9-10 mm
- Withstanding Voltage: 1.6KV
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval:

N=Number of poles  
Dim L=Nx3.81+2.5  
Dim B=(N-1)x3.81

POLES	Tolerance
2-5p	±0.10
6-10p	±0.15
11-15p	±0.20
16-20p	±0.25
21-24p	±0.30

PART NO.: HA xx 71 x 0 00J0 G

	Color	RoHS compliant
End stackable 0	Black (RAL9005)	(lead<4%)
No. of poles 2	Red (RAL3001/D)	In copper Alloy
02 2 poles 3	Orange(RAL2011/P)	
03 3 poles 4	Yellow(RAL1018/A)	
... .. 5	Green(RAL6018/T)	
24 24 poles 6	Blue (RAL5015/A)	
	8 Grey(RAL7004/P)	
	9 White(RAL1102)	
	C Multiple colors	

mat'l. code		surface ASME Y14.5	tolerance ASME Y14.5	projection	product family TERMINAL BLOCK	
ltr	ecn no	dr	date		title	
					TERMINAL BLOCK	
tolerances unless otherwise specified				MM	SPRING CLAMP, 180D WIRE INLET	
angles				scale	dwg no	
X°±1'					sheet 1 of 1	
dr EVIN ZHONG 052314					size	
enr EVIN ZHONG 052314					A4	
chr HANKE FENG 052314					type	
appd SHI JUN 052314				CUSTOMER Drawing		
sheet index	revision	A				
	sheet	1				