

- PART NO OF PLUG HOUSINGS TO BE MATED ; SEE TABLE-1.
  - POWER CIRCUITS ; SEE FIG 1.
  - CIRCUIT NUMBERS ; SEE FIG 1.
  - RECOMMENDED SCREW ; PAN-HEADED, TYPE 2 TAPPING SCREW, NOMINAL DIAMETER 3mm LENGTH; SEE TABLE-2 (JIS B1115, B1122).
  - FASTENING TORQUE FOR SCREW ; 0.392N·m MAX.
  - MEASURED AT 2mm FROM [Z]
  - MEASURED AT 7.5mm FROM [Z]
  - MARKING FOR DISCERNMENT OF THE CONTACT FINISH ; SEE TABLE.
  - INSTRUCTION SHEET NO ; 411-5932.
  - DETAIL OF TERMINALS TO BE MATED ; SEE TABLE-2.
  - ID MARK, PART NUMBER INDICATED
  - COLOR OF TINE PLATE IS BLACK
1. 嵌合相手ハウジング型番 ; TABLE-1 参照。  
 2. パワー回路 ; FIG 1 参照。  
 3. 回路番号 ; FIG 1 参照。  
 4. 推奨取付ねじ ; JIS B1115, B1122タッピングねじ。ね径3mm、呼び径3、長さ ; TABLE-2参照  
 5. ねじ締付トルク ; 0.392N·m MAX  
 6. [Z]より2mmの位置で測定。  
 7. [Z]より7.5mmの位置で測定。  
 8. コンタクト識別用マーク ; 表参照。  
 9. 取扱説明書 NO ; 411-5932。  
 10. 嵌合相手端子構成 ; TABLE-2 参照。  
 11. ID MARK, PART NUMBERを表示  
 12. タインプレート色は黒

TABLE-1	
POS 極数	FEMALE HSG メスハウジング
34	1123337 1674925
35	1123338 1674558
32	1123339 1674922
33	1473651 1827617
35	1123340 1674928
31	1123341 1674919

TABLE-2		
プリント基板板厚 (mm)	1.2	1.6
THICKNESS OF PCB (mm)	5	6
固定用ねじ下長 (mm)		
NOMINAL LENGTH OF SCREW (mm)		


  

THIS DRAWING IS A CONTROLLED DOCUMENT.	OWN: Y. KAWAHARA 19APRO1	CHK: R. KOMIYAMA 19APRO1	APVD: N. SAI 19APRO1
DIMENSIONS: 単位: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般寸法 ±0.3	0-PLC ±0.5	1-PLC ±0.5
		2-PLC ±0.5	3-PLC ±0.5
		4-PLC ±0.5	5-PLC ±0.5
		6-PLC ±0.5	7-PLC ±0.5
		8-PLC ±0.5	9-PLC ±0.5
		10-PLC ±0.5	11-PLC ±0.5
		12-PLC ±0.5	13-PLC ±0.5
		14-PLC ±0.5	15-PLC ±0.5
		16-PLC ±0.5	17-PLC ±0.5
		18-PLC ±0.5	19-PLC ±0.5
		20-PLC ±0.5	
		21-PLC ±0.5	
		22-PLC ±0.5	
		23-PLC ±0.5	
		24-PLC ±0.5	
		25-PLC ±0.5	
		26-PLC ±0.5	
		27-PLC ±0.5	
		28-PLC ±0.5	
		29-PLC ±0.5	
		30-PLC ±0.5	
		31-PLC ±0.5	
		32-PLC ±0.5	
		33-PLC ±0.5	
		34-PLC ±0.5	
		35-PLC ±0.5	
		36-PLC ±0.5	
		37-PLC ±0.5	
		38-PLC ±0.5	
		39-PLC ±0.5	
		40-PLC ±0.5	
		41-PLC ±0.5	
		42-PLC ±0.5	
		43-PLC ±0.5	
		44-PLC ±0.5	
		45-PLC ±0.5	
		46-PLC ±0.5	
		47-PLC ±0.5	
		48-PLC ±0.5	
		49-PLC ±0.5	
		50-PLC ±0.5	
		51-PLC ±0.5	
		52-PLC ±0.5	
		53-PLC ±0.5	
		54-PLC ±0.5	
		55-PLC ±0.5	
		56-PLC ±0.5	
		57-PLC ±0.5	
		58-PLC ±0.5	
		59-PLC ±0.5	
		60-PLC ±0.5	
		61-PLC ±0.5	
		62-PLC ±0.5	
		63-PLC ±0.5	
		64-PLC ±0.5	
		65-PLC ±0.5	
		66-PLC ±0.5	
		67-PLC ±0.5	
		68-PLC ±0.5	
		69-PLC ±0.5	
		70-PLC ±0.5	
		71-PLC ±0.5	
		72-PLC ±0.5	
		73-PLC ±0.5	
		74-PLC ±0.5	
		75-PLC ±0.5	
		76-PLC ±0.5	
		77-PLC ±0.5	
		78-PLC ±0.5	
		79-PLC ±0.5	
		80-PLC ±0.5	
		81-PLC ±0.5	
		82-PLC ±0.5	
		83-PLC ±0.5	
		84-PLC ±0.5	
		85-PLC ±0.5	
		86-PLC ±0.5	
		87-PLC ±0.5	
		88-PLC ±0.5	
		89-PLC ±0.5	
		90-PLC ±0.5	
		91-PLC ±0.5	
		92-PLC ±0.5	
		93-PLC ±0.5	
		94-PLC ±0.5	
		95-PLC ±0.5	
		96-PLC ±0.5	
		97-PLC ±0.5	
		98-PLC ±0.5	
		99-PLC ±0.5	
		100-PLC ±0.5	
		101-PLC ±0.5	
		102-PLC ±0.5	
		103-PLC ±0.5	
		104-PLC ±0.5	
		105-PLC ±0.5	
		106-PLC ±0.5	
		107-PLC ±0.5	
		108-PLC ±0.5	
		109-PLC ±0.5	
		110-PLC ±0.5	
		111-PLC ±0.5	
		112-PLC ±0.5	
		113-PLC ±0.5	
		114-PLC ±0.5	
		115-PLC ±0.5	
		116-PLC ±0.5	
		117-PLC ±0.5	
		118-PLC ±0.5	
		119-PLC ±0.5	
		120-PLC ±0.5	
		121-PLC ±0.5	
		122-PLC ±0.5	
		123-PLC ±0.5	
		124-PLC ±0.5	
		125-PLC ±0.5	
		126-PLC ±0.5	
		127-PLC ±0.5	
		128-PLC ±0.5	
		129-PLC ±0.5	
		130-PLC ±0.5	
		131-PLC ±0.5	
		132-PLC ±0.5	
		133-PLC ±0.5	
		134-PLC ±0.5	
		135-PLC ±0.5	
		136-PLC ±0.5	
		137-PLC ±0.5	
		138-PLC ±0.5	
		139-PLC ±0.5	
		140-PLC ±0.5	
		141-PLC ±0.5	
		142-PLC ±0.5	
		143-PLC ±0.5	
		144-PLC ±0.5	
		145-PLC ±0.5	
		146-PLC ±0.5	
		147-PLC ±0.5	
		148-PLC ±0.5	
		149-PLC ±0.5	
		150-PLC ±0.5	
		151-PLC ±0.5	
		152-PLC ±0.5	
		153-PLC ±0.5	
		154-PLC ±0.5	
		155-PLC ±0.5	
		156-PLC ±0.5	
		157-PLC ±0.5	
		158-PLC ±0.5	
		159-PLC ±0.5	
		160-PLC ±0.5	
		161-PLC ±0.5	
		162-PLC ±0.5	
		163-PLC ±0.5	
		164-PLC ±0.5	
		165-PLC ±0.5	
		166-PLC ±0.5	
		167-PLC ±0.5	
		168-PLC ±0.5	
		169-PLC ±0.5	
		170-PLC ±0.5	
		171-PLC ±0.5	
		172-PLC ±0.5	
		173-PLC ±0.5	
		174-PLC ±0.5	
		175-PLC ±0.5	
		176-PLC ±0.5	
		177-PLC ±0.5	
		178-PLC ±0.5	
		179-PLC ±0.5	
		180-PLC ±0.5	
		181-PLC ±0.5	
		182-PLC ±0.5	
		183-PLC ±0.5	
		184-PLC ±0.5	
		185-PLC ±0.5	
		186-PLC ±0.5	
		187-PLC ±0.5	
		188-PLC ±0.5	
		189-PLC ±0.5	
		190-PLC ±0.5	
		191-PLC ±0.5	
		192-PLC ±0.5	
		193-PLC ±0.5	
		194-PLC ±0.5	
		195-PLC ±0.5	
		196-PLC ±0.5	
		197-PLC ±0.5	
		198-PLC ±0.5	
		199-PLC ±0.5	
		200-PLC ±0.5	

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
				SEE 1 OF 3			

△ FIG 1 CIRCUIT NUMBERS      △ 70 ; パワー回路用  
 (FOR POWER CIRCUIT)

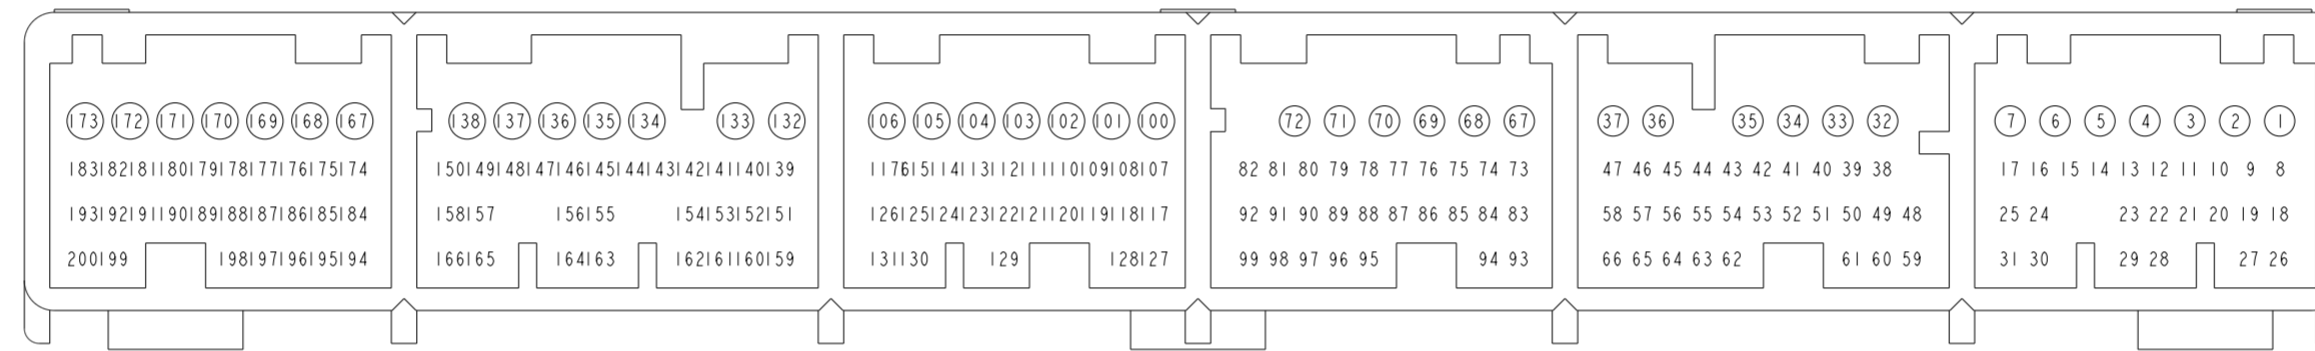

MARKING	WEIGHT(g)	V	OUTER 外装	INNER 内装	NO CONTACT CIRCUIT NO 欠番	SOLDERING SIDE 半田付け側	CONTACT SIDE 接触部側	040TAB	025 TAB	MATERIAL 材料	COLOR (色)	PART NUMBER (型番)	
	2	48.7	∅2.63	PAPER BOX ダンボール箱	PLASTIC TUBE プラスチックチューブ	SAME AS 1473649-2						1473649-9	
	2	48.7	∅2.63	PLASTIC BOX 通い箱	PLASTIC TUBE プラスチックチューブ	-	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN × 102 (BRIGHT)	-	18~31, 48~66, 83~99, 117~131, 151~166, 184~200	SPS GF17	NATURAL (自然色)	1473649-2
	61	53.9	∅2.4	PAPER BOX ダンボール箱	PLASTIC TUBE プラスチックチューブ	-	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN × 100 (BRIGHT)	132, 133	18~31, 48~66, 83~99, 117~131, 151~166, 184~200	PBT GF15	NATURAL (自然色)	1473649-7
	4 △12	34.1	∅2.63	PLASTIC BOX 通い箱	PLASTIC TUBE プラスチックチューブ	67~99	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN × 86 (BRIGHT)	-	18~31, 48~66, 117~131, 151~166, 184~200	SPS GF17	NATURAL (自然色) △13	1473649-4
	61	53.9	∅2.4	PLASTIC BOX 通い箱	PLASTIC TUBE プラスチックチューブ	-	SELECTIVE-TIN (MATTE)	SELECTIVE-TIN × 100 (BRIGHT)	132, 133	18~31, 48~66, 83~99, 117~131, 151~166, 184~200	PBT GF15	NATURAL (自然色)	6473649-1
				PACKING STYLE 梱包形態		△3	CONTACT FINISH (仕上げ)	GOLD PLATED CIRCUIT NO (金めっき回路番号)		HOUSING ハウジング			

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN Y. KAWAHARA 19APR01  
 CHK R. KOMIYAMA 19APR01  
 APVD N. SAI 19APR01

TE Connectivity

NAME 025/040 EFI ECU CONNECTOR  
 200 POSITION CAP HOUSING ASSEMBLY

PRODUCT SPEC SEE 1 OF 3  
 APPLICATION SPEC SEE 1 OF 3

SIZE A2 CAGE CODE 00779 DRAWING NO. 1473649 RESTRICTED TO -

MATERIAL SEE 1 OF 3 FINISH SEE 1 OF 3

CUSTOMER DRAWING SCALE 1:1 SHEET 2 OF 3 REV B6

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT 19

ALL RIGHTS RESERVED.

LOC  
J

DIST

REVISIONS



変更

P	LTR	DESCRIPTION	ECN	DATE	DWN	APVD
		SEE SHEET 1 OF 3				

43.2 MAX  
(24.6)  
(23)  
(24.4)

(164.9)  
(161.5)

CAP ASSEMBLY & PLUG ASSEMBLY ENGAGEMENT DRAWING  
 キャップアッセンブリ & プラグアッセンブリ 嵌合図

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y. KAWAHARA 19APR01	 TE Connectivity			
DIMENSIONS: 単位: 概 mm		CHK R. KOMIYAMA 19APR01				
		APVD N. SAI 19APR01	NAME 名称 025/040 EFI ECU CONNECTOR 200 POSITION CAP HOUSING ASSEMBLY			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 = ± 0.3		PRODUCT SPEC SEE 1 OF 3	SIZE A3	CAGE CODE 00779	DRAWING NO C-1473649	RESTRICTED TO -
MATERIAL 材料 SEE 1 OF 3		FINISH 仕上 SEE 1 OF 3	APPLICATION SPEC 取付適用規格 SEE 1 OF 3		WEIGHT SEE 1 OF 3	
		CUSTOMER DRAWING		SCALE 尺度 1:1	SHEET 3 OF 3	REV B6

1470-19 (3/11)