



# DUAL-IN-LINE HEADERS

## SERIES 162, 862 • SHRINK DIP HEADER AND STRIPS, SOLDER TAIL

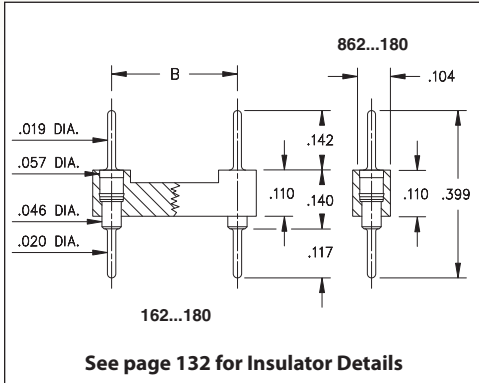

- High density DIP headers & strips for adapters and board stacking applications with .070" lead spacing
- Series 162 DIP headers and Series 862 strip headers use MM #6218 pins. See page 208 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations
- For Electrical, Mechanical and Environmental Data, see page 264 for details

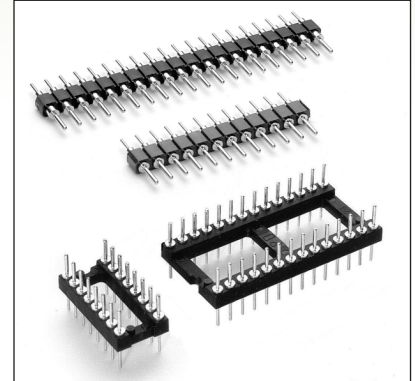

Total number of pins				Quantity per tube	<h3>ORDERING INFORMATION</h3>				
	A	B	C						
16	0.572	0.3	0.39	35	162-XX-316-00-180000				
28	0.992	0.4	0.49	20	162-XX-428-00-180000				
30	1.062	0.4	0.49	18	162-XX-430-00-180000				
48	1.692	0.4	0.49	12	162-XX-448-00-180000				
20	0.712	0.6	0.69	28	162-XX-620-00-180000				
28	0.992	0.6	0.69	20	162-XX-628-00-180000				
40	1.412	0.6	0.69	14	162-XX-640-00-180000				
42	1.482	0.6	0.69	13	162-XX-642-00-180000				
48	1.692	0.6	0.69	12	162-XX-648-00-180000				
52	1.832	0.6	0.69	11	162-XX-652-00-180000				
56	1.972	0.6	0.69	10	162-XX-656-00-180000				
64	2.252	0.6	0.69	9	162-XX-664-00-180000				
68	2.392	0.6	0.69	8	162-XX-668-00-180000				
64	2.252	0.75	0.84	8	162-XX-764-00-180000				
<div style="border: 1px solid black; border-radius: 50%; padding: 5px; display: inline-block;">XX=Plating Code See Below</div>					<div style="border: 1px solid black; padding: 5px; display: inline-block; color: white; background-color: green;">RoHS-2 2011/65/EU</div>				
					<h4>SINGLE ROW STRIP HEADER</h4> <p>If desired, we will supply any length up to 21 pins.</p>				
21	1.482	---	.104	---	862-XX-021-00-180000				
<b>SPECIFY PLATING CODE XX =</b>					10 ◆	90	40 ◆		
Pin Plating					10 μ" Au	200 μ" Sn/Pb	200 μ" Sn		

