


# SMD Power Inductor CDH53




## Description

- Ferrite drum core construction.
- Magnetically unshielded.
- L × W × H: 6.0 × 5.4 × 3.2 mm Max.
- Product weight: 0.18g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

## Dimension - [mm]

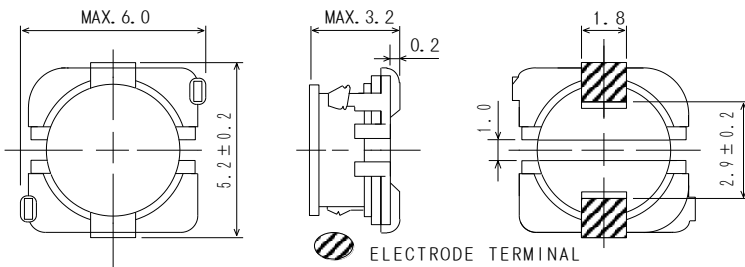

## Land pattern and Schematics - [mm]

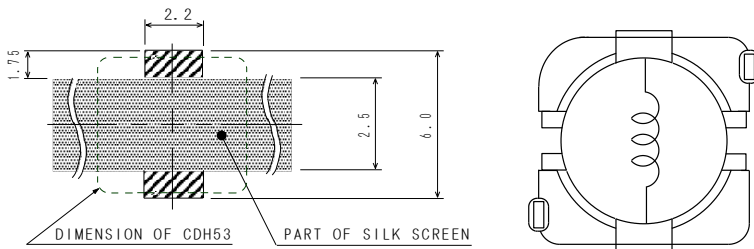

## Environmental Data


- Operating temperature range: -40°C ~ +100°C (including coil's self temperature rise)
- Storage temperature range: -40°C ~ +100°C
- Solder reflow temperature: 260 °C peak.

## Packaging

- Carrier tape and reel packaging.
- 13" diameter reel
- 1500pcs per reel

## Applications

- Ideally used in PDA, DVD, HDD, DVC, Game machine, Notebook PC, etc as DC-DC converter

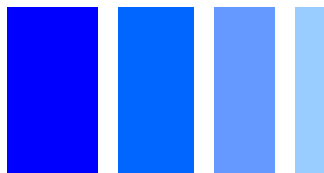


### Electrical Characteristics

| Part Name     | Stamp | Inductance<br>( $\mu\text{H}$ )<br>[ within ] ※1 | D.C.R. ( $\Omega$ )<br>Max. (Typ.)<br>(at 20°C) | Rated Current<br>(A) ※2 |
|---------------|-------|--|---|-------------------------|
| CDH53NP-2R2MC | 2R2   | 2.2±20%  | 66m (51m)                                       | 2.03                    |
| CDH53NP-3R3MC | 3R3   | 3.3±20%  | 88m (68m)                                       | 1.88                    |
| CDH53NP-4R7MC | 4R7   | 4.7±20%  | 96m (74m)                                       | 1.68                    |
| CDH53NP-100LC | 100   | 10±15%   | 0.16(0.13)                                      | 1.23                    |
| CDH53NP-120LC | 120   | 12±15%   | 0.18(0.14)                                      | 1.12                    |
| CDH53NP-150KC | 150   | 15±10%   | 0.25(0.20)                                      | 1.00                    |
| CDH53NP-180KC | 180   | 18±10%   | 0.28(0.21)                                      | 0.88                    |
| CDH53NP-220KC | 220   | 22±10%   | 0.39(0.30)                                      | 0.80                    |
| CDH53NP-270KC | 270   | 27±10%   | 0.42(0.32)                                      | 0.72                    |
| CDH53NP-330KC | 330   | 33±10%   | 0.49(0.38)                                      | 0.67                    |
| CDH53NP-390KC | 390   | 39±10%   | 0.55(0.43)                                      | 0.64                    |
| CDH53NP-470KC | 470   | 47±10%   | 0.77(0.59)                                      | 0.53                    |
| CDH53NP-560KC | 560   | 56±10%   | 0.87(0.67)                                      | 0.50                    |
| CDH53NP-680JC | 680   | 68±5%  | 1.21(0.96)                                      | 0.45                    |
| CDH53NP-820JC | 820   | 82±5%  | 1.34(1.07)                                      | 0.39                    |
| CDH53NP-101JC | 101   | 100±5%   | 1.57(1.25)                                      | 0.37                    |
| CDH53NP-121JC | 121   | 120±5%   | 1.80(1.44)                                      | 0.34                    |
| CDH53NP-151JC | 151   | 150±5%   | 2.40(1.92)                                      | 0.31                    |
| CDH53NP-181JC | 181   | 180±5%   | 2.66(2.13)                                      | 0.30                    |
| CDH53NP-221JC | 221   | 220±5%   | 3.73(2.99)                                      | 0.26                    |

※1. Inductance measuring frequency: 2.2 $\mu\text{H}$  ~ 4.7 $\mu\text{H}$  at 7.96 MHz;  
10 $\mu\text{H}$  ~ 220 $\mu\text{H}$  at 1kHz.













※2. Rated current: The DC current at which the inductance decreases to 90% of its initial value or when  $\Delta t=40^\circ\text{C}$ , whichever is lower ( $T_a=20^\circ\text{C}$ ).

# SMD Power Inductor CDH53

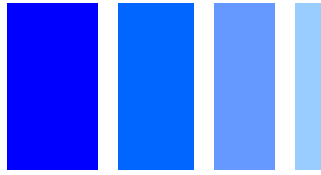


## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

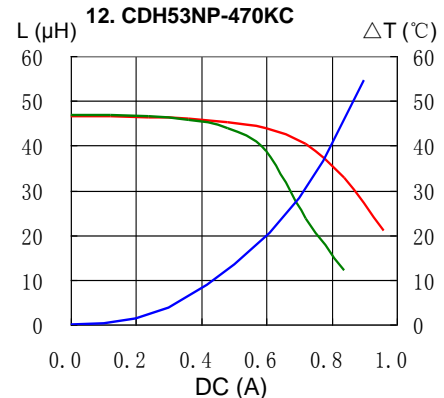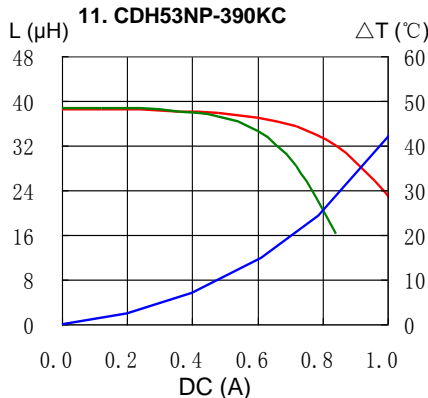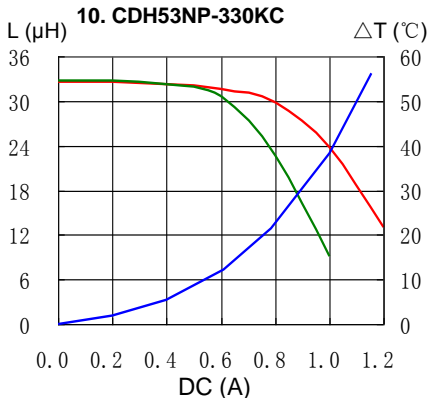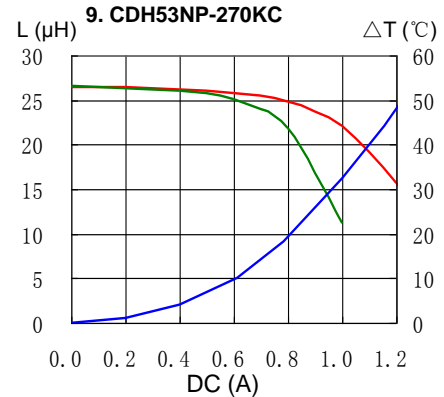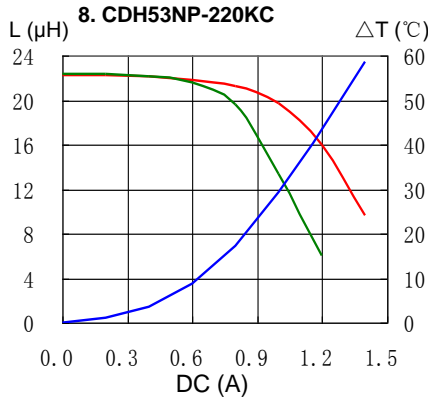
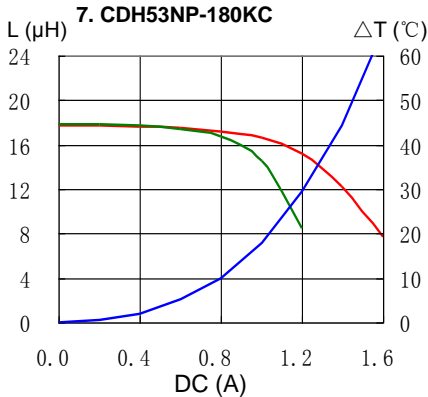
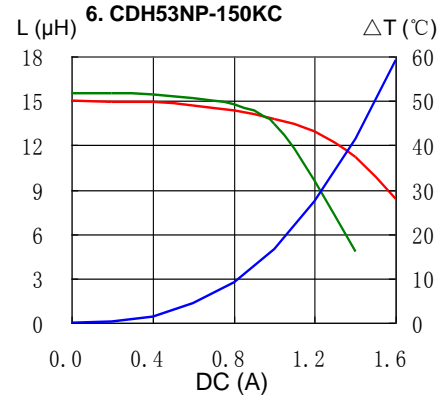
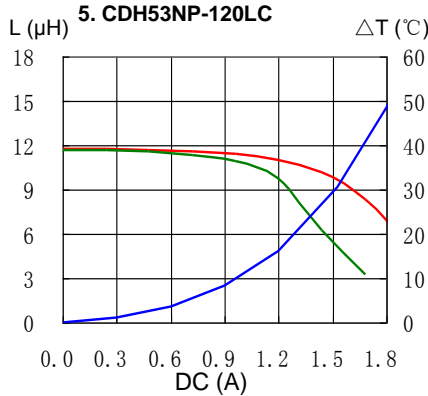
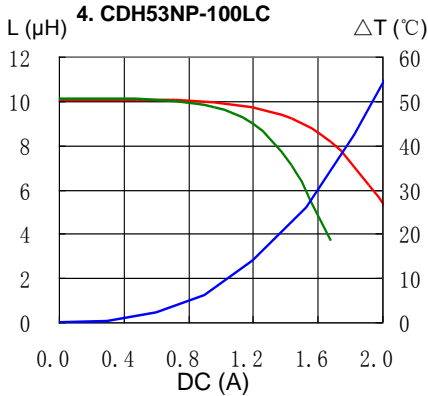
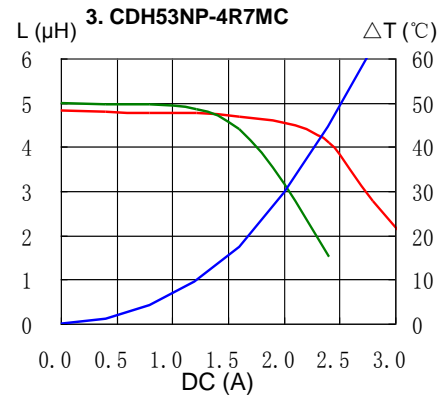
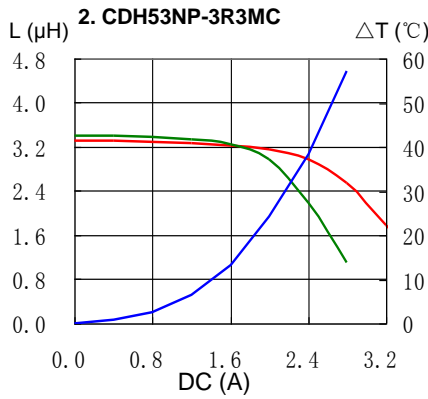
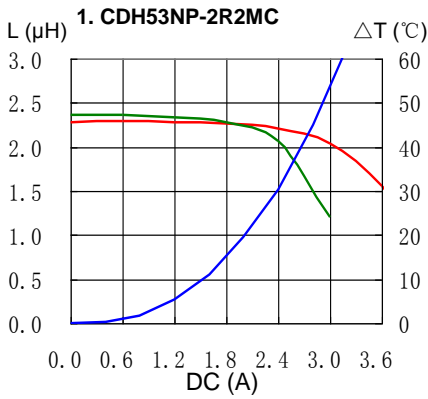


# SMD Power Inductor CDH53

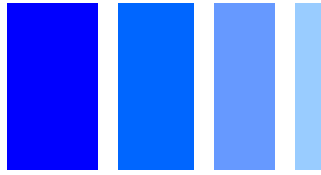


## Saturation Current & Temperature Rise Graph

— L (20°C) — L (100°C) —  $\Delta T$

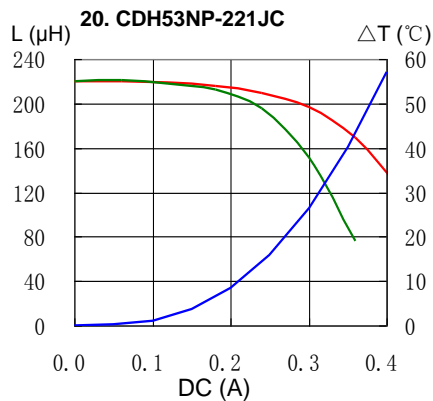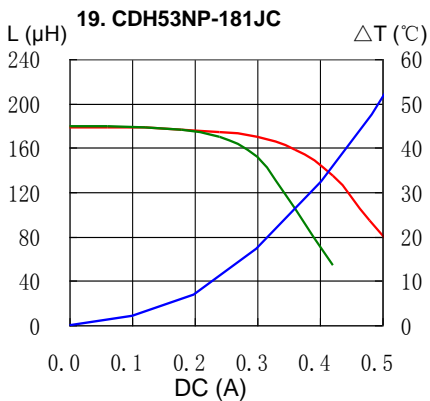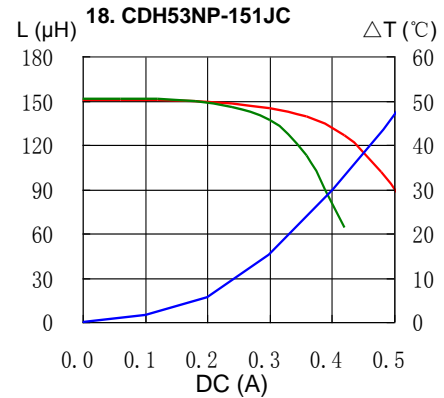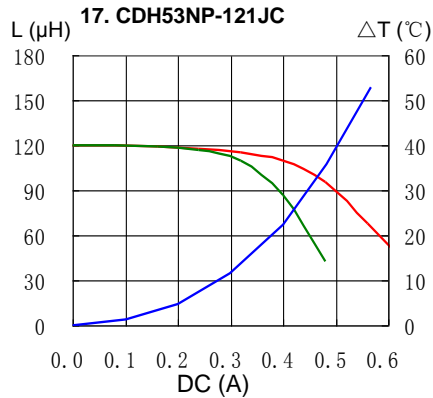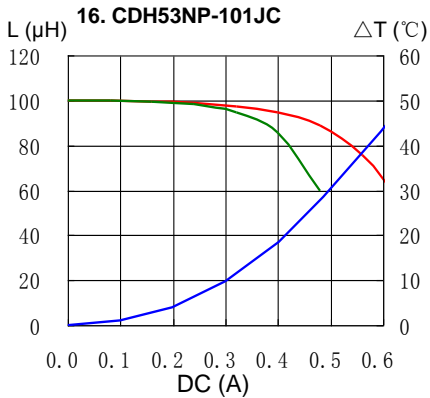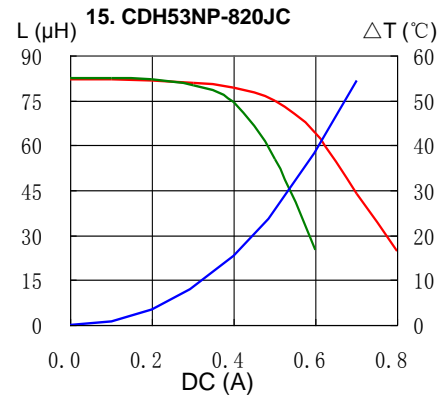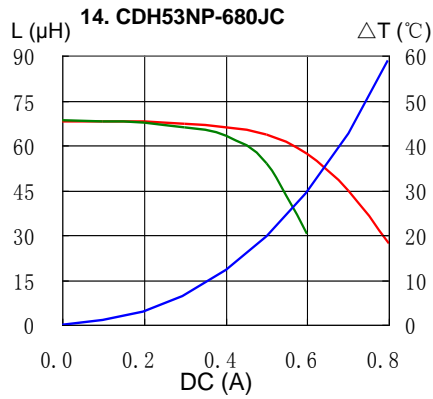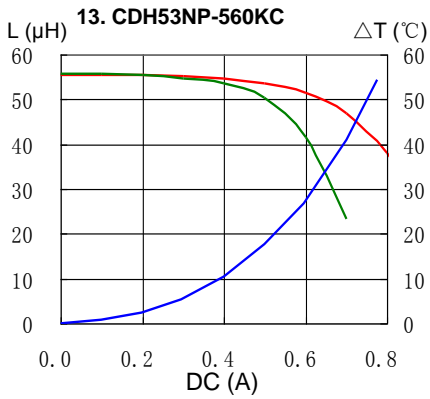


# SMD Power Inductor CDH53

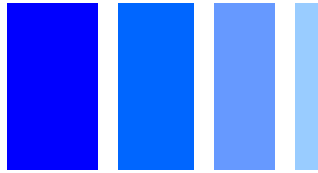


## Solder Reflow Condition

Heat Endurance

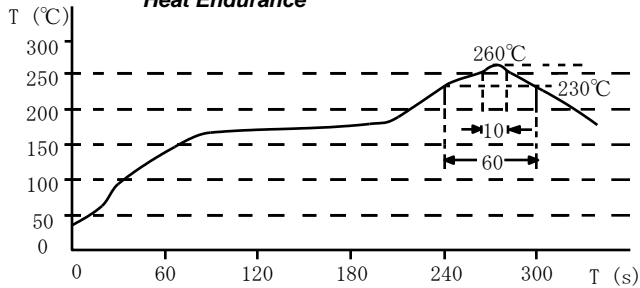

Temperature Chart

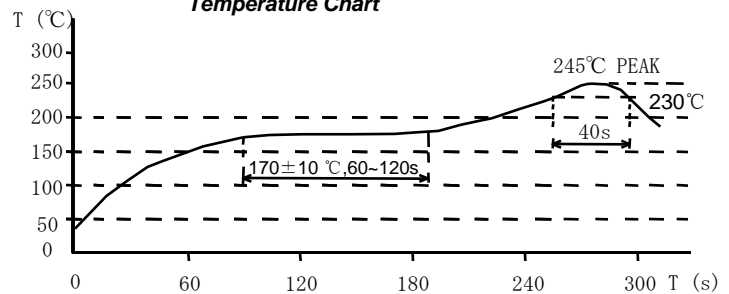

Please refer to the sales offices on our website - <http://www.sumida.com>

### Hong Kong

Tel.+852-2880-6781  
FAX.+852-2565-9600  
[sales@hk.sumida.com](mailto:sales@hk.sumida.com)

### Saitama(Japan)

Tel.+81-48-691-7300  
FAX.+81-48-691-7340  
[sales@jp.sumida.com](mailto:sales@jp.sumida.com)

### Chicago

Tel.+1-847-545-6700  
FAX. +1-847-545-6720  
[sales@us.sumida.com](mailto:sales@us.sumida.com)

### Shanghai

Tel.+86-21-5836-3299  
FAX.+86-21-5836-3266  
[shanghai.sales@cn.sumida.com](mailto:shanghai.sales@cn.sumida.com)

### Seoul

Tel.+82-2-6237-0777  
FAX.+82-2-6237-0778  
[sales@kr.sumida.com](mailto:sales@kr.sumida.com)

### Obernzell

Tel.+49-8591-937-0  
FAX. +49-8591-937-103  
[contact@eu.sumida.com](mailto:contact@eu.sumida.com)

### Shenzhen

Tel.+86-755-8291-0228  
FAX.+86-755-8291-0338  
[shenzhen.sales@cn.sumida.com](mailto:shenzhen.sales@cn.sumida.com)

### Singapore

Tel.+65-6296-3388  
FAX.+65-6841-4426  
[sales@sg.sumida.com](mailto:sales@sg.sumida.com)

### Neumarkt

Tel.+49-9181-4509-110  
FAX. +49-9181-4509-310  
[infocomp@eu.sumida.com](mailto:infocomp@eu.sumida.com)

### Taipei

Tel.+886-2-8751-2737  
FAX.+886-2-8751-2738  
[sales@tw.sumida.com](mailto:sales@tw.sumida.com)

### San Jose

Tel.+1-408-321-9660  
FAX.+1-408-321-9308  
[sales@us.sumida.com](mailto:sales@us.sumida.com)