

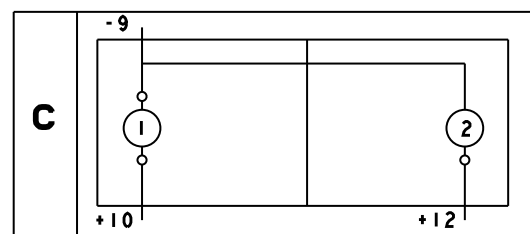
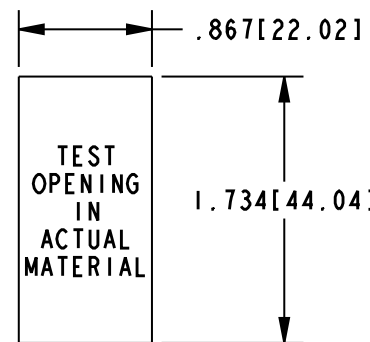


HONEYWELL
PART NUMBER

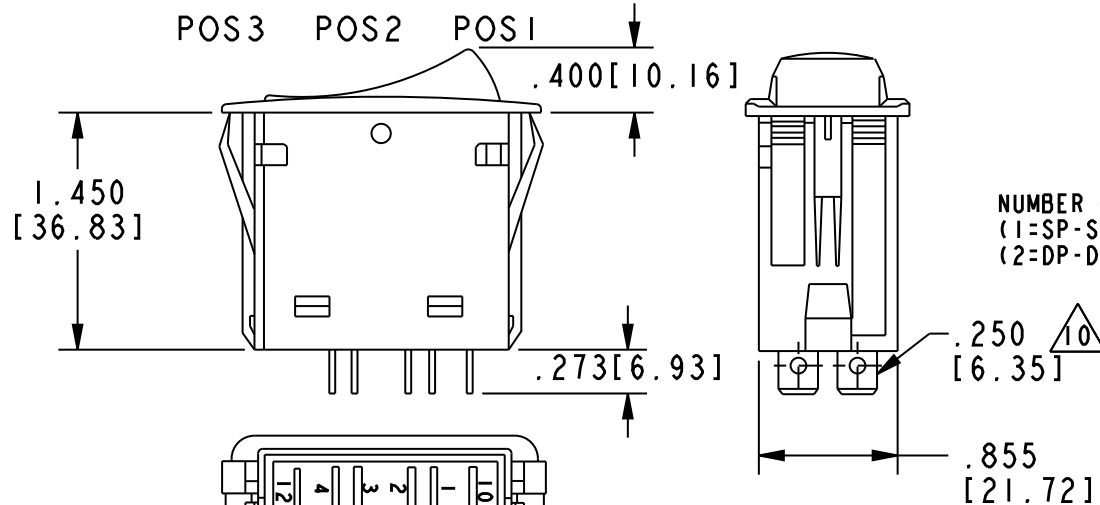

REV	DOCUMENT	CHANGED BY	CHECK
B	0062802	VKR 24MAR10	CMH

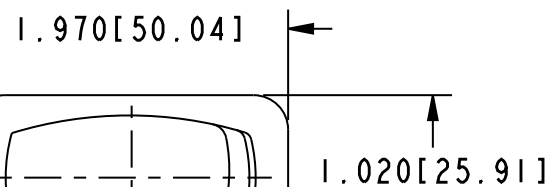

LAMP ⁷ (A=AMBER, G=GREEN, R=RED, N=NONE)

LAMP ⁸ (A=AMBER, G=GREEN, R=RED, N=NONE)

ILLUMINATION STYLE ⁹

CIRCUITRY ⁵

NUMBER OF POLES (1=SP-SINGLE POLE, USES TERMINAL 1-2-4) (2=DP-DOUBLE POLE, USES TERMINALS 1-2-4 AND 5-6-8)

TERMINAL STYLE ¹⁰


LED VOLTAGE (2=6V, 3=12V, 4=24V)

ACTUATOR COLOR (B=BLACK, G=GRAY, R=RED, W=WHITE)

BASE/BEZEL COLOR (B=BLACK, G=GRAY, R=RED, W=WHITE)

LENS STYLE AND COLOR ⁷ (7 = LARGE WHITE TRANSLUCENT, 9 = WHITE TRANSPARENT BAR, N = NONE)

LENS STYLE AND COLOR ⁸ (7 = LARGE WHITE TRANSLUCENT, 9 = WHITE TRANSPARENT BAR, N = NONE)

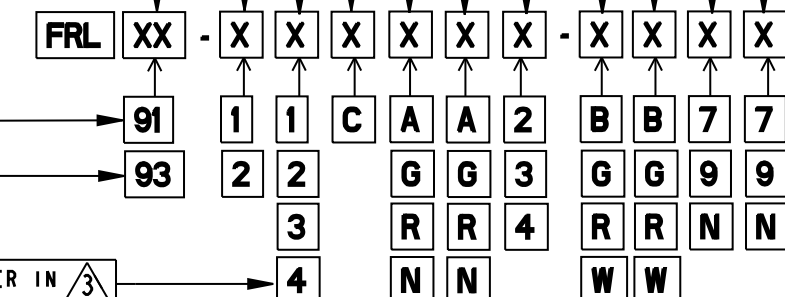

	CIRCUIT MADE WITH ROCKER IN ³		
	POSITION 3 (1&2, 5&6)	POSITION 2	POSITION 1 (2&4, 6&8)
1	ON	OFF	ON
2	OFF	NONE	ON
3	ON	NONE	ON
4	(OFF)	NONE	ON
5	(ON)	OFF	ON
6	OFF	NONE	(ON)
7	(ON)	OFF	(ON)
8	(ON)	NONE	ON

ELECTRICAL RATING & APPROVALS ¹⁰

FOR .250 WIDE TABS: 20A, 12V
FOR .187 WIDE TABS: 15A, 12V

- NOTES
- 1 - OPERATING TEMPERATURE RANGE: -40°F TO +185°F (-40°C TO +85°C)
 - 2 - ELECTRICAL LIFE: 50,000 CYCLES MOMENTARY, 100,000 CYCLES MAINTAINED.
 - 3 - MECHANICAL LIFE: 250,000 CYCLES MIN
 - ⁴ - SEE DIAGRAM FOR CATALOGING SCHEME
 - ⁵ - PARENTHESIS DENOTE MOMENTARY ACTION
 - ⁶ - SEALED TO IP67
 - ⁷ - ABOVE TERMINALS 9 AND 10
 - ⁸ - ABOVE TERMINALS 11 AND 12
 - ⁹ - REFER TO CIRCUIT DIAGRAMS
 - ¹⁰ - TERMINAL WIDTH AND ELECTRICAL RATING DEPENDENT ON STYLE SELECTED

DESIGN UNITS: INCH
TOLERANCES UNLESS NOTED:

NO PLACES	X	±	.040
ONE PLACE	.X	±	.030
TWO PLACE	.XX	±	.015
THREE PLACE	.XXX	±	.015
FOUR PLACE	.XXXX	±	.0005
ANGLES	X	±	2°

THIRD ANGLE PROJECTION

DRAWN CR 13 JUN 05
CHECK RJ 13 JUN 05

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY

Pro/ENGINEER 2D

Honeywell

TITLE: **SWITCH, ROCKER**

SIZE	TYPE	DRAWING NAME	REV
B	I	FRL SERIES CHART 1	B
SCALE	NTS	SHEET	1 OF 1