

SPECIFICATION CONTROL DRAWING

FLTWA0311

TITLE

GENERAL PURPOSE HOOKUP WIRE, MODIFIED POLYESTER-INSULATED, 600 VOLT

Date

8-30-10


Revision

F

The complete requirements for procuring the wire described herein shall consist of this document and the issue in effect of Raychem Specification WCD 3106, UL Subject 758, Style 10208, File E303150 and carries UL labels to this effect.

CONDUCTOR - SOLID TIN-COATED COPPER

INSULATION - FLAME RETARDED,
MODIFIED POLYESTER

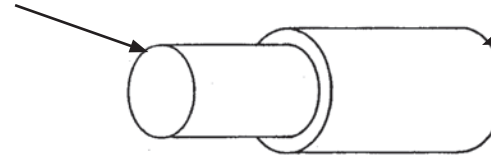

CONSTRUCTION DETAILS

PART NUMBER 1/	WIRE SIZE (AWG)	CONDUCTOR DIAMETER (in.) (mm)		MAXIMUM RESISTANCE AT 20°C (ohms/1000 ft.) (ohms/km)	FINISHED WIRE DIAMETER (in.) (mm)			NOMINAL WEIGHT (lbs/1000 ft.) (kg/km)
		MINIMUM	NOMINAL		MINIMUM	NOMINAL	MAXIMUM	
FLTWA0311-30-*	30	.0099 (.251)	.0100 (.254)	114.0 (374.)	.024 (.610)	.026 (.660)	.028 (.711)	.57 (.85)
FLTWA0311-28-*	28	.0125 (.318)	.0126 (.320)	70.8 (232.)	.027 (.686)	.029 (.737)	.031 (.787)	.79 (1.18)
FLTWA0311-26-*	26	.0157 (.399)	.0159 (.404)	44.5 (146.)	.030 (.762)	.032 (.813)	.034 (.864)	1.1 (1.64)
FLTWA0311-22-*	22	.0250 (.635)	.0253 (.643)	17.2 (56.4)	.039 (.990)	.041 (1.04)	.043 (1.09)	2.4 (3.57)
FLTWA0311-20-*	20	.0317 (.805)	.0320 (.813)	10.7 (35.1)	.046 (1.17)	.048 (1.22)	.050 (1.27)	3.7 (5.57)

WIRE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 135°C
 VOLTAGE RATING: 600 volts (rms) at sea level
 INSULATION ELONGATION AND TENSILE STRENGTH:
 Elongation, 230% (minimum)
 Tensile Strength, 5200 lbf/in² (minimum)
 INSULATION FLAWS:
 Spark Test, 6.0 kV (rms)
 Impulse Dielectric Test, 8.0 kV (peak)
 INSULATION THICKNESS: .005 inch (minimum), .006 inch (minimum average)

SHRINKAGE: 125°C for 1 hour, 0.125 in. (maximum) per end
 THERMAL STABILITY: 167°C for 168 hours,
 Elongation Retention, 75% (minimum)
 Tensile Strength Retention, 55% (minimum)
 VOLTAGE WITHSTAND (Post Environmental): 1500 volts (rms), 60 Hz

PART NUMBER:
 The "*" in the part numbers in the table shall be replaced by a color code designator.
 1/ Example: AWG 20, white: FLTWA0311-20-9
 AWG 20, white with black stripe: FLTWA0311-20-90

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.
 Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER. AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

The TE logo, Tyco Electronics and Raychem are trademarks.

DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.



Raychem Wire & Cable
 501 Oakside Avenue
 Redwood City, CA 94063-3800
 Phone: 1-800-227-8816
 Fax: 1-650-361-6297