

DESCRIPTION: 96 POSITION - 64 PIN - DIN - FEMALE - IDC



**MATERIAL:**

INSULATOR: GLASS FILLED PBT  
UL RATED 94V-0  
230°C PROCESS TEMPERATURE  
CONTACTS: COPPER ALLOY  
DOUBLE SPRING HARDENED  
GOLD PLATED MATING AREA  
TIN ON TAILS

**ELECTRICAL:**

CURRENT RATING: 1 AMP Max. FOR 28AWG  
1.5 AMP Max. FOR 26AWG  
OPERATING TEMPERATURE: -40°C TO +145°C

STRAIN RELIEF SOLD SEPARATELY  
PART NUMBER 164-096-001L000

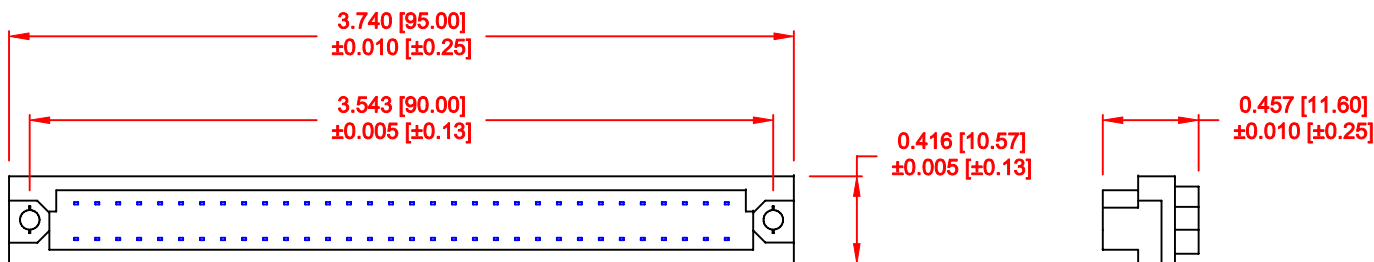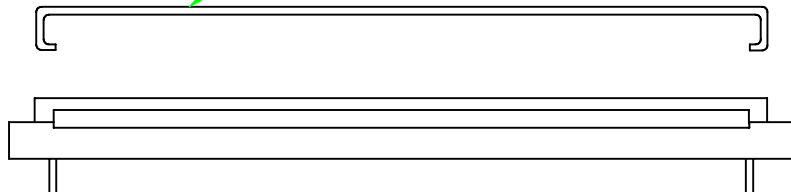

689-096-290L001

096 POSITION =  
ROWS A & C LOADED  
TOTAL 64 CONTACTS



THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OF SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.

DRAWN: C. SMITH

DATE: 04-08-09

CHECKED:

DATE:

NorComp

SCALE: 1 : 1 SHEET 1 OF 1 REV 0

DWG NO. 689-096-290L001