


# SMD Transponder Coils

Conformity to RoHS Directive


## TPL Series TPL1183427/1183525/1254035/1453527

### FEATURES

- Because it is complete resin mold, it is high reliability (Because re-mold is possible in customer specially).
- Terminals are high reliability by a spring structure. It has been especially superior in bending and anti-drop proof.
- It maintains stable electrical signal to have employed sectional winding to coil. Because it is a high SRF design structure, a stable electrical characteristic is provided.
- Terminals are lead-free.

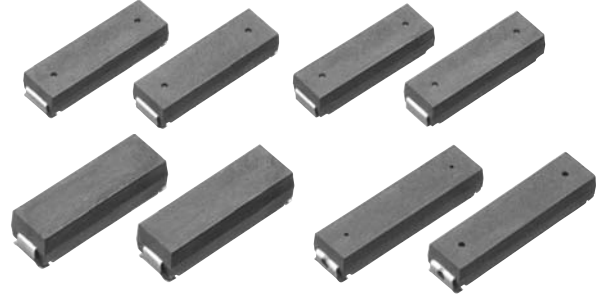

### SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN

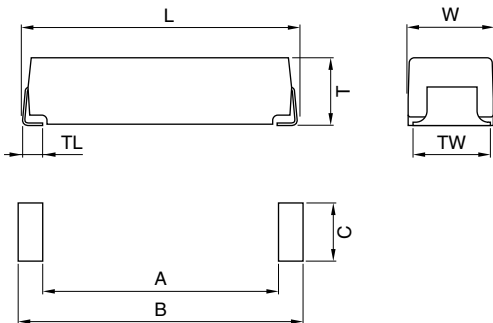

Dimensions in mm

Type	L	W	T	TL	TW	A	B	C	Weight(g)
TPL1183427	11.8±0.4	3.4±0.4	2.75±0.3	0.8	2.4	9.9	13.5	2.7	0.33
TPL1183525	11.8±0.5	3.5±0.4	2.4±0.3	0.8	3.2	9.9	13.5	3.5	0.31
TPL1254035	12.5±0.5	3.9±0.5	3.4±0.3	0.8	3.5	10.4	14.4	4.0	0.44
TPL1453527	14.5±0.5	3.5±0.4	2.7±0.3	0.8	3.2	12.7	16.3	3.5	0.37

### PACKAGING STYLE AND QUANTITIES

Packaging style	Type	Quantity
Taping	TPL1183427	2500 pieces/reel
	TPL1183525	2500 pieces/reel
	TPL1254035	2000 pieces/reel
	TPL1453527	2500 pieces/reel

• Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

• All specifications are subject to change without notice.

## ELECTRICAL CHARACTERISTICS

Inductance*1 (mH)[125kHz]	Inductance tolerance*2 (%)	Q typ. [125kHz]	Self-resonant frequency (kHz)typ.	DC resistance ( $\Omega$ )typ.	Part No.
7.20	$\pm 5$	66	690	50	TPL1183427-722J-720N
2.61	$\pm 5$	50	650	26	TPL1183525-262J-261N
7.08	$\pm 5$	72	800	45	TPL1254035-712J-708N
2.35	$\pm 5$	52	590	23	TPL1453527-242J-235

\*1 This inductance value is an example of the current commercial product.

If a different inductance is needed, please contact us.


\*2 Available for an inductance tolerance of less than  $\pm 5\%$ .

- Test equipment L, Q, SRF: 4194A IMPEDANCE ANALYZER(HP)  
16047E TEST FIXTURE(Agilent) with TDK original base  
Rdc: VP-2941A MILLIOHM METER(MATSUSHITA)

• If an ultrasonic process is used, confirm the condition settings in order to prevent disconnection.

## TYPICAL ELECTRICAL CHARACTERISTICS

### INDUCTANCE vs. FREQUENCY CHARACTERISTICS

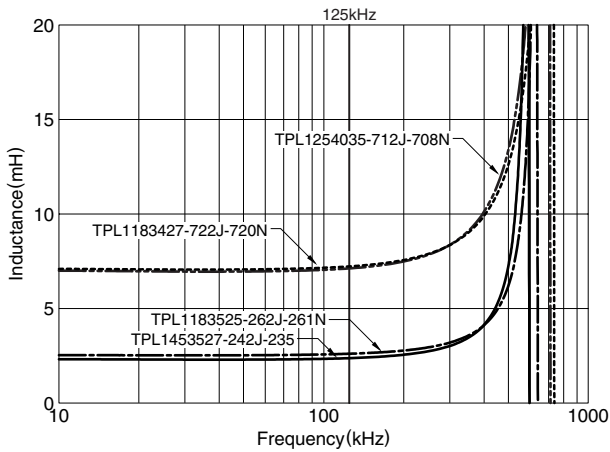

### Q vs. FREQUENCY CHARACTERISTICS

