
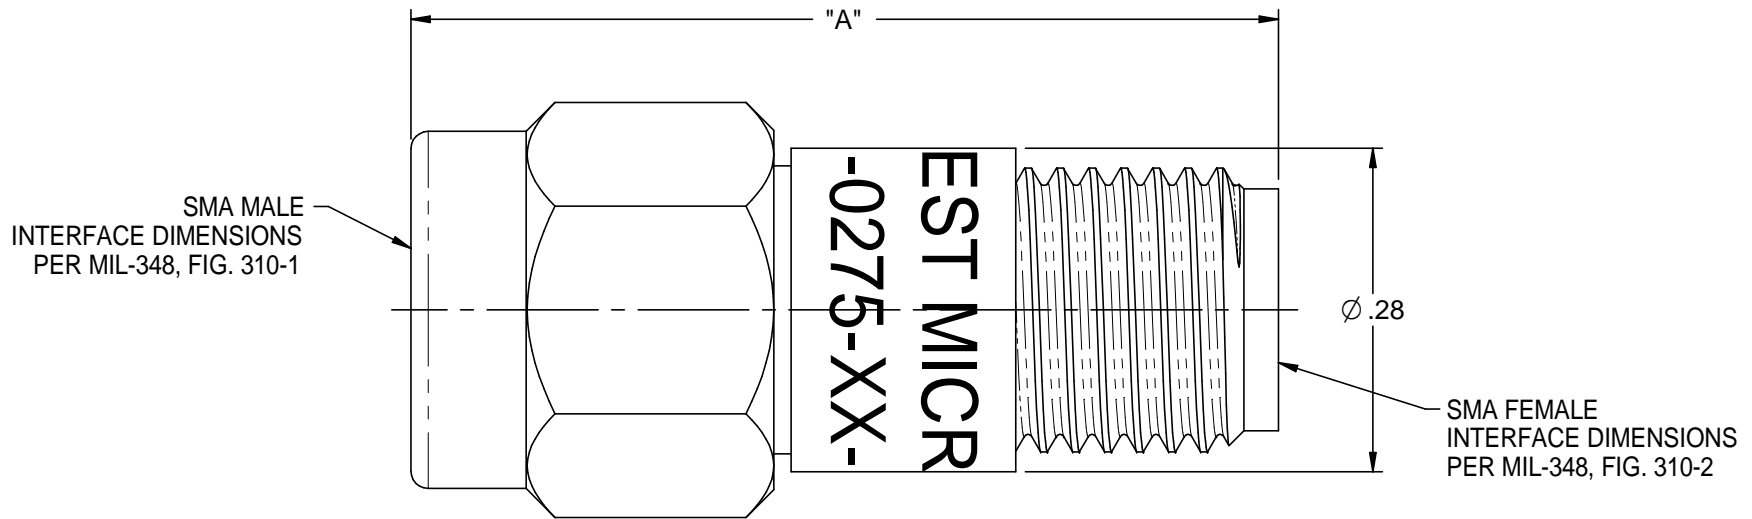


ATTENUATION VALUE	"A" ±.020
0 - 12.5 dB	.750
13 - 30 dB	.875

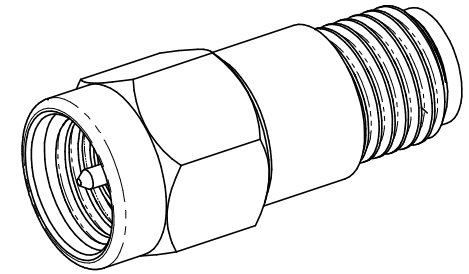

NOTES: UNLESS OTHERWISE SPECIFIED.

1. SPECIFICATIONS:

1.1 FREQUENCT RANGE: DC - 18.0 GHz

1.2 ATTENUATION ACCURACY:

0 dB: +0.3/-0 dB

0.5 - 6 dB: ±0.3 dB

6.5 - 20 dB: ±0.5 dB

20.5 - 30 dB: ±1.0 dB

1.3 VSWR (MAX):

1.07+0.015f(GHz)

1.4 MAXIMUM INPUT POWER:

AVERAGE: 2 WATTS AT +25°C, DERATED LINEARLY TO 0.5 WATTS AT +125°C.

PEAK: 200 WATTS FOR A DUTY CYCLE OF 5x10<sup>-4</sup>, MAX PULSE DURATION OF 5 MICROSECONDS.

1.5 OPERATING TEMP. RANGE: -65°C TO +125°C

1.6 FINISH: PASSIVATED STAINLESS STEEL

		<b>Midwest Microwave</b>	
	<b>RoHS</b> <input checked="" type="checkbox"/> 2002/95/EC	Title: <b>ATTENUATOR 0 - 30 dB</b>	
<small>This PROPRIETARY Document is property of Emerson Network Power Connectivity Solutions. It is confidential, non-transferable, and issued with the clear understanding that it is not tracked or copied without permission and is retrievable upon demand.</small>	<small>UNLESS OTHERWISE SPECIFIED</small> UNITS: INCH .XX ±.02 .XXX ±.005 ANGLES ±2°	Model No. <b>ATT-0275-XX-SMA-02</b>	
<small>INTERPRET DRAWING IN ACCORDANCE WITH ASME Y14.5-2009.</small>	Size <b>A</b>	DO NOT SCALE DRAWING	Date: <b>7/22/2013</b> Sheet 1 of 1