


DESCRIPTION: 9 POS MICRO-D FEMALE (ASSEMBLED) TO BLUNT CUT

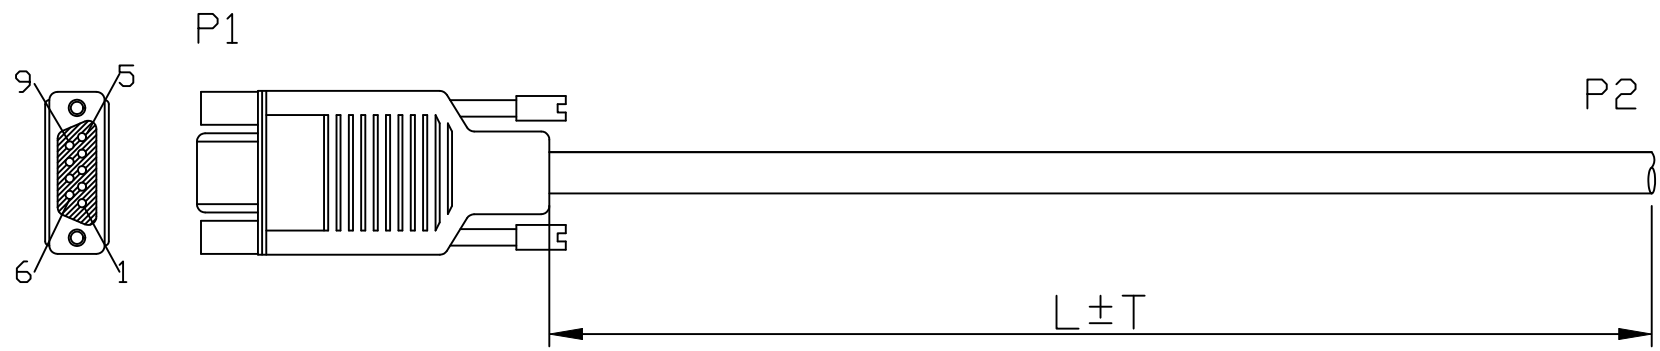

1. P1. CONNECTOR: NORCOMP MICRO D 9S, ASSEMBLED HOOD W/THUMBSCREWS
2. P2. BLUNT CUT END
3. WIRE: 28AWG [7X36] x9C +ALUMINUM FOIL W/ BRAID 65%, UL2464+CSA, COLOR BLACK
4. PINOUT:

P1	_____	P2	_____
1	_____	BLACK	_____
2	_____	BROWN	_____
3	_____	RED	_____
4	_____	ORANGE	_____
5	_____	YELLOW	_____
6	_____	GREEN	_____
7	_____	BLUE	_____
8	_____	VIOLET	_____
9	_____	GRAY	_____
SHELL	_____	DRAIN	_____

CCA-009-YYYYR152

I = INCHES ———— |
 F = FEET |
 M = METERS | LENGTH

EXAMPLES:
 CCA-009-I18R152 = 18 INCHES
 CCA-009-F03R152 = 3 FEET
 CCA-009-M01R152 = 1 METER

PACKAGED: 1 PER BAG

RoHS COMPLIANT

	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF NorComp AND SHALL NOT BE REPRODUCED, COPIED OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT WRITTEN PERMISSION.		DRAWN: P. JENKINS	DATE: 01-18-12
			CHECKED:	DATE:
<h1>NorComp</h1>		SCALE: NTS	SHEET OF 1 1	REV 0
		DWG NO. CCA-009-YYYYR152		