


DATE	SYM	REVISION RECORD	AUTH	DR.	CK.
8/04/07	A	ADDED "ROHS COMPLIANT"	T.B.	B.S.	

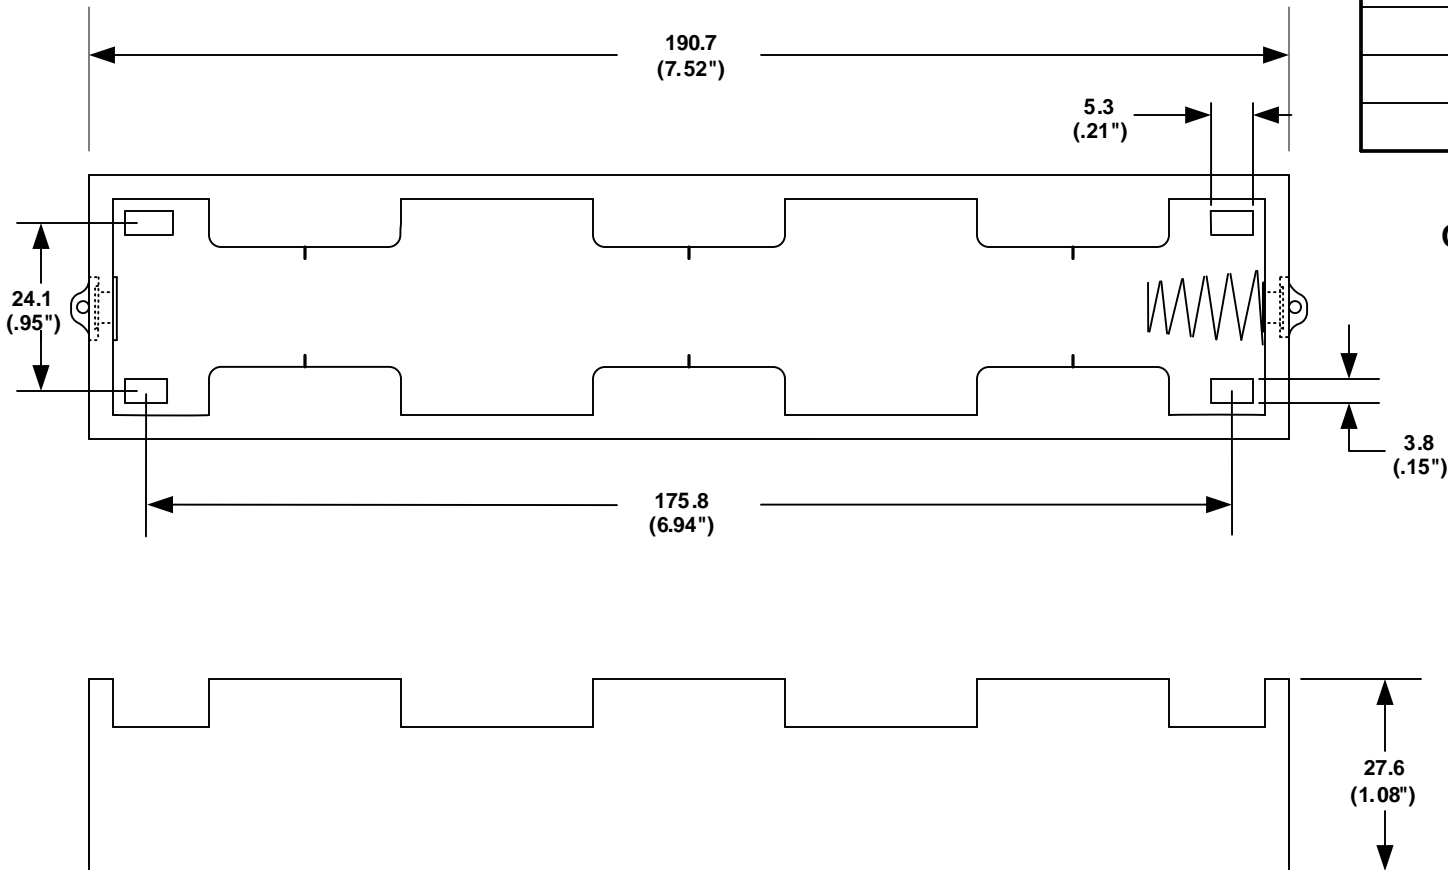

ORDERING CODE **BH13D**


SOLDER LUGS = L  
WIRE LEADS = W

SOLDER LUGS SHOWN ABOVE

**SPECIFICATIONS :**

- Plastic material - Polypropylene, Black
- Flammability rating-UL94 HB, UL file no. E216959
- Temperature Range: -10°C to +100°C
- Springs - nickel plated spring steel
- Rivets - Brass, nickel plated
- 9 Volts Snaps - Brass, nickel plated
- Contact resistance: Under 50mΩ for +/- contacts per EIA-540J000
- ROHS COMPLIANT

**Note:** Dimensions in mm. ( inches )

TOLERANCES (EXCEPT AS NOTED)		 <b>Memory Protection Devices, Inc.</b> 200 Broad Hollow Road, Farmingdale, New York 11735	
DECIMAL			
+ .5 (.020")		SCALE	DRAWN BY S.C.
- .5 (.020")			APPROVED BY
FRACTIONAL	TITLE	THREE "D" CELL HOLDER	
+ .8 (.030")			
ANGULAR	DATE	DRAWING NUMBER	
+ 3°	8/04/2007	BH13DL	
- 3°			