




S Series

High Voltage relays

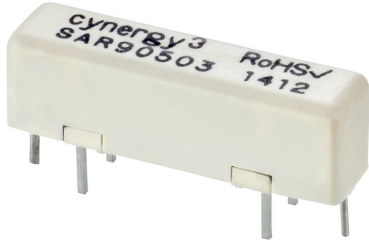


The S series relay was developed for the high voltage ATE market, where printed circuit board space is at a premium. The S series high voltage relay offers a 3kV or 5kV* isolation performance in a 30mm package.

Low contact resistance, through the use of Rhodium contact reed switches, makes the S series suitable for many high voltage applications at DC and low frequency, where performance and reliability are paramount.

Mechanical Dimensions


All dimensions are in Millimetres (inches)

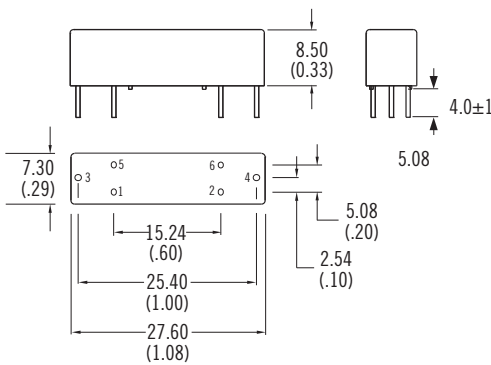

PIN SIZE

PINS 1, 2, 5 & 6 0.7 Square (0.025")
PINS 3 & 4 0.8 (0.031") dia.

Relay Circuit Diagram



(Viewed from Underside)

Pin 1 is top left, when viewed from above, with respect to part marking

Cynergy3 Components Ltd.
7 Cobham Road
Ferndown Industrial Estate
Wimborne, Dorset BH21 7PE
Telephone +44 (0) 1202 897969
Email: sales@cynergy3.com

- Compact footprint
- Designed specifically for High Voltage ATE
- Rhodium contacts for Low Contact Resistance
- 3kV or 5kV* Isolation between contacts and 5kV isolation between contacts and coil
- Excellent lifetime characteristics

Contact Specification	Unit	Condition	3kV SPNO	5kV SPNO
Contact Material			Rhodium	Rhodium
Isolation across contacts	kV	DC or AC peak	3	5*
Switching Power Max.	W		10	10
Switching Voltage Max.	V	DC or AC peak	20	20
Switching Current Max.	A	DC or AC peak	0.5	0.5
Carry Current Max.	A	DC or AC peak	1.5	1.5
Capacitance across contacts	pF	coil to screen grounded	<0.1	<0.1
Lifetime operations		dry switching	10 ⁹	10 ⁹
		10W switching	10 ⁶	10 ⁶
Contact Resistance	mΩ	max (typical)	80 (30)	80 (30)
Insulation Resistance	Ωmin	(typical)	10 ¹⁰ (10 ¹³)	10 ¹⁰ (10 ¹³)

***DC only, Pin 3 at high voltage**

Coil Specification at 20°C	5V	12V	24V	5V	12V	24V
Must Operate Voltage	3.7	9	20	3.7	9	20
Must Release Voltage	0.5	1.25	4	0.5	1.25	4
Operate Time	1.0	1.0	1.0	1.0	1	10
Release Time	0.5	0.5	0.5	0.5	0.5	0.5
Resistance	140	600	1000	140	600	1000

Relay Specification

Isolation contact/coil	kV	5	5
Insulation resistance contact to all terminals	Ωmin (typical)	10 ¹⁰ (10 ¹³)	10 ¹⁰ (10 ¹³)
Environmental			
Operating Temp range	°C	-20 to +70	-20 to +70
Weight	gm	3.1	3.1

Please refer to this document for circuit design notes:-

<http://www.cynergy3.com/blog/application-notes-reed-relays-0>

Part Numbering System

Reed Switch Size

Contact Form A=SPNO


Contact Material
R=Rhodium,

Moulding Ref. No.

Coil Voltage
05=5Vdc, 12=12Vdc,
24=24Vdc

Isolation between
Contacts

3=3kV, 5=5kV

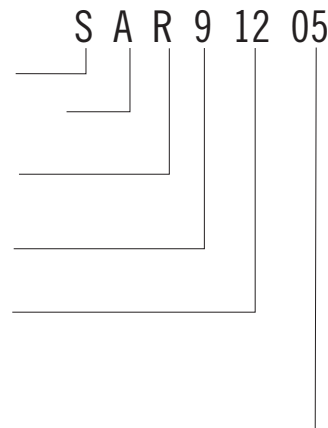

ISO9001 CERTIFIED

S Series 2016

© 2016 Cynergy3 Components, All Rights Reserved. Specifications are subject to change without prior notice. Cynergy3 Components and the Cynergy3 Components logo are trademarks of Cynergy3 Components Limited.

www.cynergy3.com