
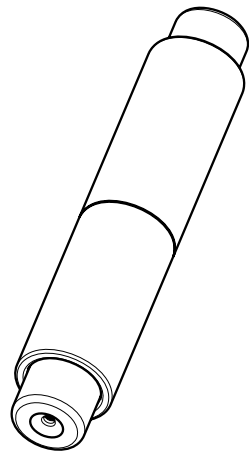
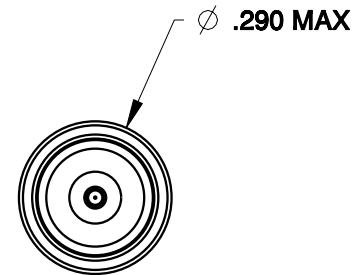


REV	ECN	APP'D
-	4679	JT 12/20/01
A	5793	

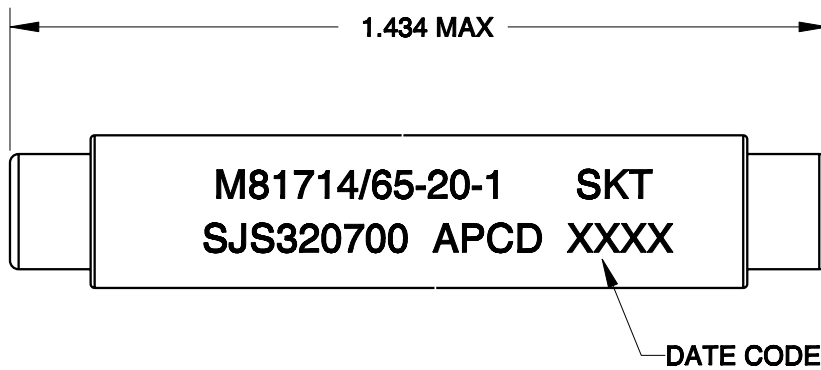

SCALE 2:1

**NOTES:**

- MATERIALS:**  
 INSULATOR BODY: POLYETHERIMIDE PER ASTM-D-5205  
 WIRE-SEALING GROMMET: SILICONE RUBBER PER A-A-59588  
 INTERNAL CONTACT: COPPER ALLOY, GOLD FINISH
- PART ACCEPTS M39029/22-192 SOCKET CONTACTS - PER TABLE.
- OPERATING RANGE:**  
 TEMPERATURE: -65° C TO 200° C  
 INSULATION RESISTANCE: 5000 MEGOHMS MIN  
 DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, SEA LEVEL  
 200 VRMS, 100,000 FT ALTITUDE  
 CURRENT RATING: 7.5 AMPS  
 VIBRATION AND SHOCK: PER MIL-T-81714, PARA. 3.5.5 AND 3.5.8.

PART NO.	DESCRIPTION	P/N MARKING
SJS320600	CONTACTS NOT SUPPLIED	SJS320700
SJS320700	QTY 2, M39029/22-192 INCLUDED	

<b>DIMENSIONS</b> ANSI Y14.5M UNITS: INCHES Pro/E FILE	<b>TOLERANCES</b> .XX ±0.01 .XXX ±0.005 ANGLES ±1.0°	<b>PROJECTION</b> 	<h1>Amphenol Pcd</h1> <p>SPECIFICATION DRAWING</p>	
			ENGR	S. HORNER 12/17/01
THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD INC., PEABODY, MA			CHKD	
			APPD	

TITLE			<b>SJS</b> <b>WIRE SPLICE</b> <b>SINGLE, SIZE 20</b>		
SIZE	DWG NO.		REV		
A	SJS320700		A		
CODE: 58982	SCALE: 3:1	SHEET 1 OF 1			