


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

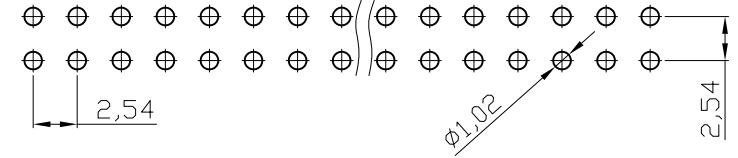

NOTES:

MATERIAL

- 1.Insulator Material:PBT+30%GF(UL94V-0),Grey
- 2.Contact Material : Brass
- 3.Contact Plating : Gold flash/Tin Over Ni
- ④ AHW xxA-0102-T:30u" Au/Tin Over Ni
- AWHW xxA-0202-T:Gold flash/Tin Over Ni

ELECTRICAL

- 1.Current Rating : 3AMP
- 2.Withstand Voltage : 500V AC/Minute
- 3.Contact Resistance : 20mΩ max
- 4.Insulation Resistance: 1000MΩ min



ENVIRONMENTAL

- 1.Operation Temperature: -40°C to +105°C
- 2.Packing : Tray packing

Order information:

- xx : 06,08,10,12,14,16,18,20,24
- 26,30,34,40,50,60,64

Dimension antitheses list	
NO. Pin	L
6P-8P	4.00
10P-64P	4.40

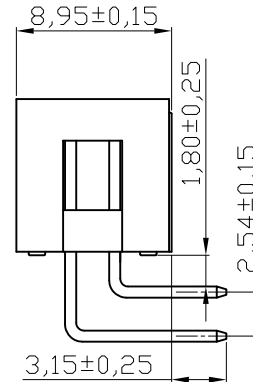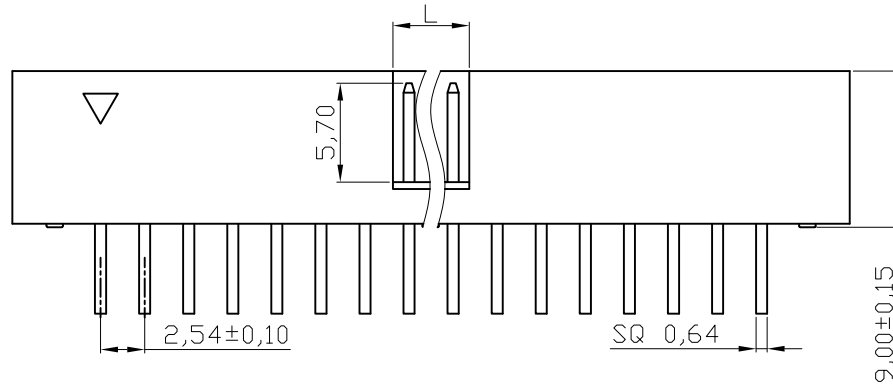

RoHS compliant
Unit: mm



Scale	Free					Date	Name	Customer-No.
TOLERANCE						Drawn	Alex	
X.X	±0.40					25.01.2006		
X.XX	±0.25	④	Add 30u" Au version	12.12.2013	Winnie	Approved	12.12.2013	Winnie
X.XXX	±0.15	③	Add UL file no.	12.12.2013	Amy			
DIM	TOL	②	Update	29.06.2009	Dean			
Angle	±3°	①	Drawn	25.01.2006	Alex			
			Id.	Modification	Date	Name		



Customer-No.	
ASSMANN WSW-No. AWHW xxA-0202-T ④ AHW xxA-0102-T	
Drawing-No.	rev04
ASS 2315 CO	Sheet
Replace	Sheet