
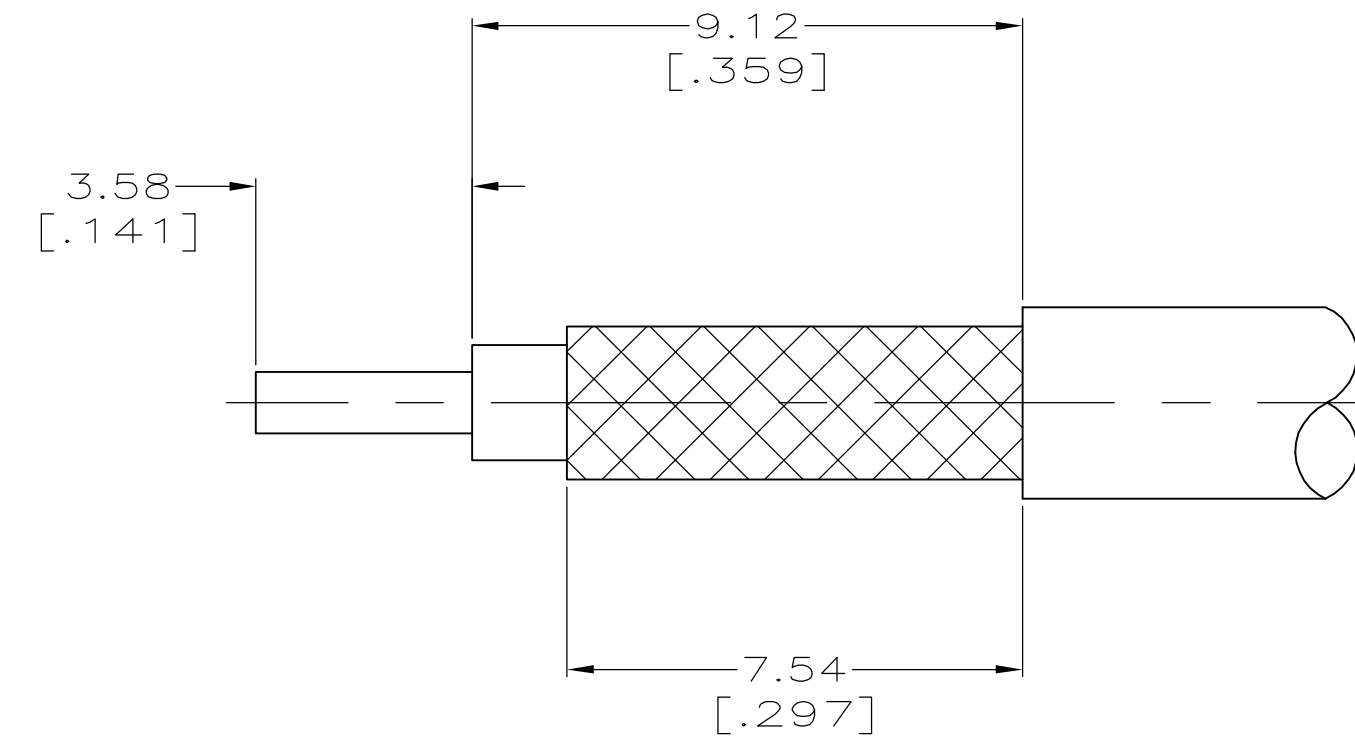


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	01	REVISED PER ECO-05-007704	02SEP05	BM KW

- 1 CONTACT CRIMP TOOLING: CRIMP TOOL M22520/2-01 WITH POSITIONER DMC K997 SELECTOR SETTING #4 FOR RG-174/U, RG-188/U & RG-316/U SINGLE AND DOUBLE SHIELDED CABLE.
- 2 FERRULE CRIMP TOOLING: CRIMP TOOL M22520/5-01 WITH DIE SET M22520/5-35B OR USE A 3.25 [.128] X 10.16 [.400] HEX DIE SET.
- 3. PRODUCT DESIGNED TO MEET PRODUCT SPECIFICATION 108-1574.
- 4. INSTRUCTION SHEET: 408-4032

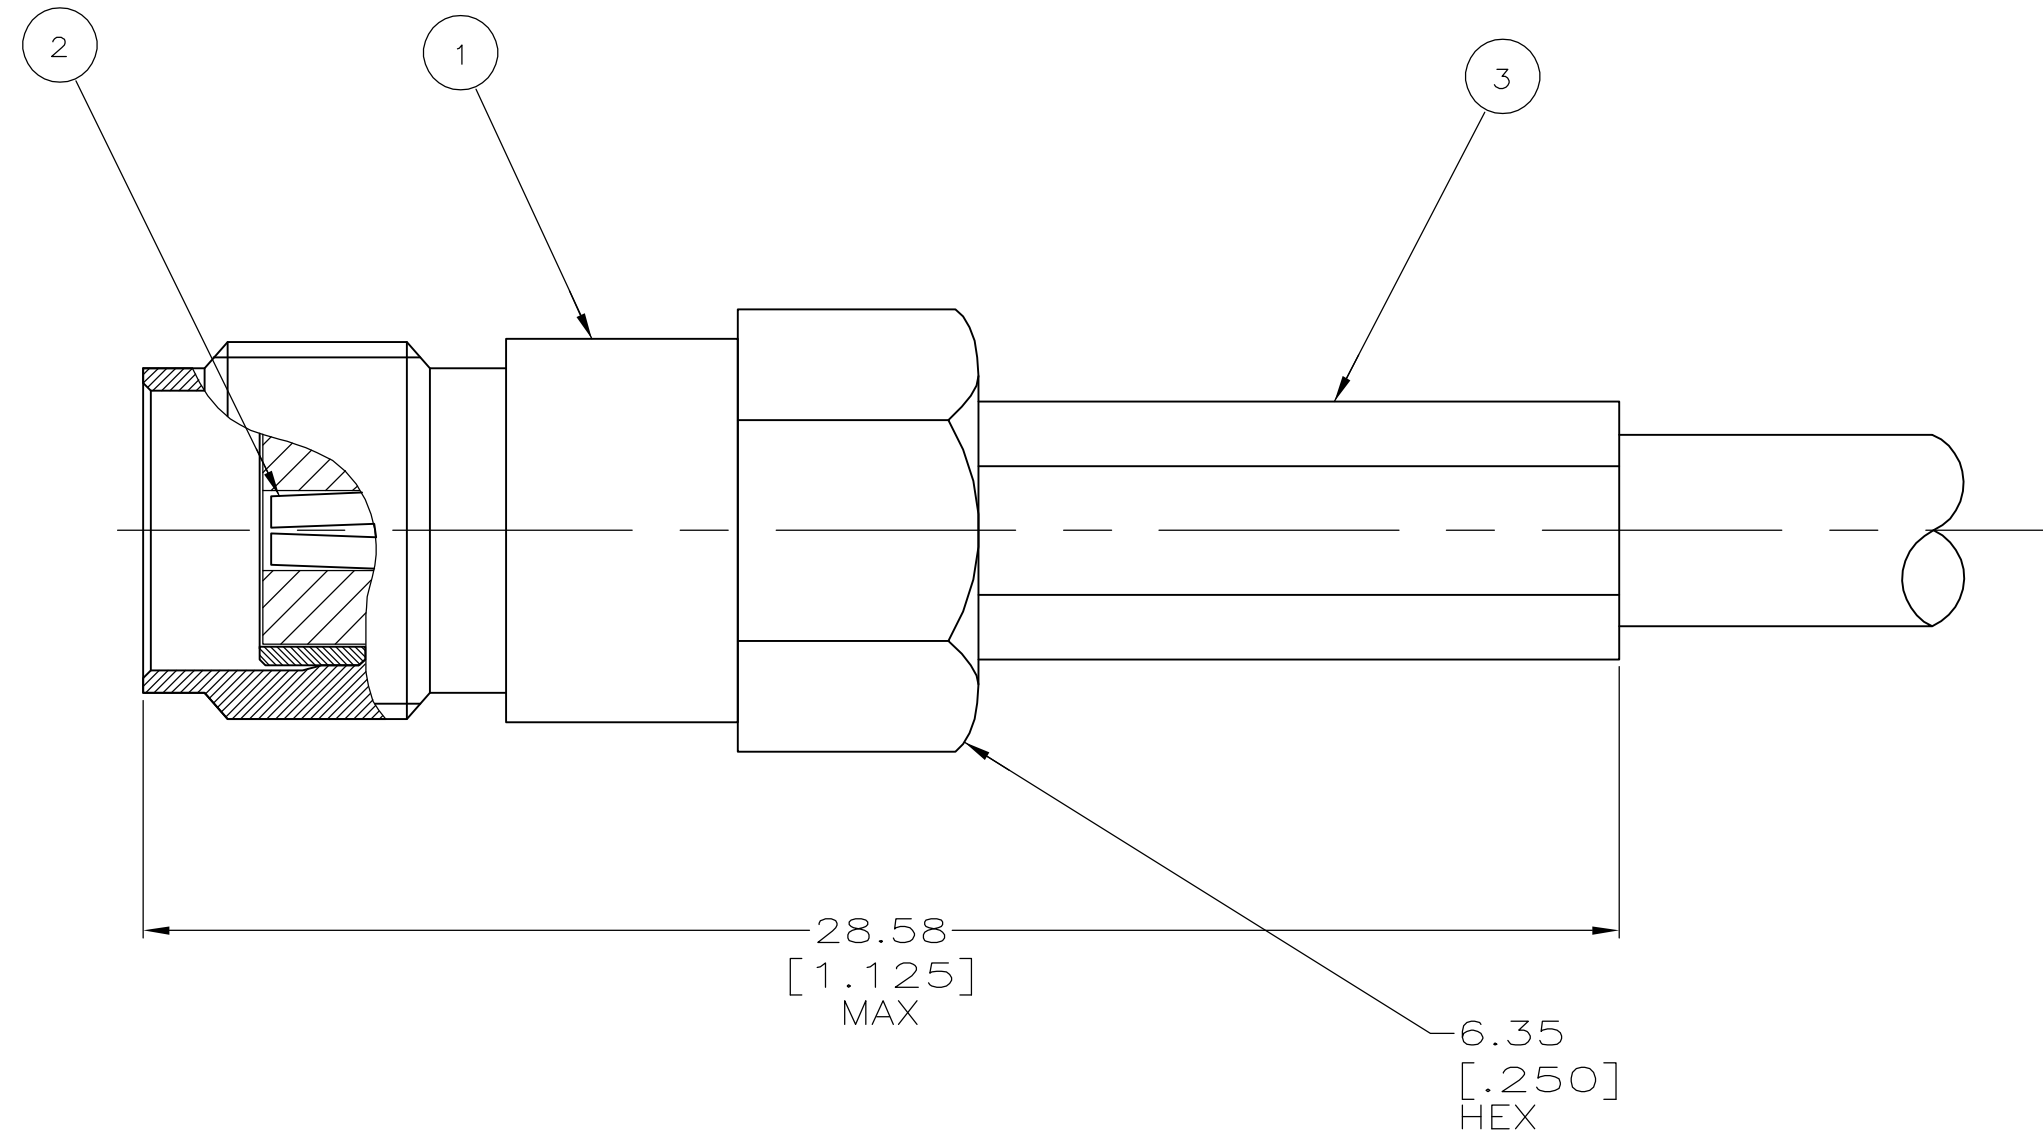

RECOMMENDED STRIP LENGTHS

△△	RG-174, -188, & -316/U	9-446556-1	447842-3	447963-2	5447648-3
CRIMP TOOLING	CABLE	③ FERRULE QTY=1	② CONTACT QTY=1	① JACK ASSY QTY=1	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN L. VARELA - 31JAN2005	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
	0 PLC ± -	CHK J. HAVENER 31JAN2005	
	1 PLC ± -	APVD D. CAMELIO 31JAN2005	
	2 PLC ± 0.40 [.016]	PRODUCT SPEC	
	3 PLC ± -	APPLICATION SPEC	NAME JACK, HEX CRIMP, COMMERCIAL, SMA
	4 PLC ± -	WEIGHT	SIZE CAGE CODE DRAWING NO RESTRICTED TO
MATERIAL	FINISH	CUSTOMER DRAWING	A2 00779 C=5447648
		SCALE 8:1 SHEET 1 OF 1 REV 01	