


Extended length is with 500g of force

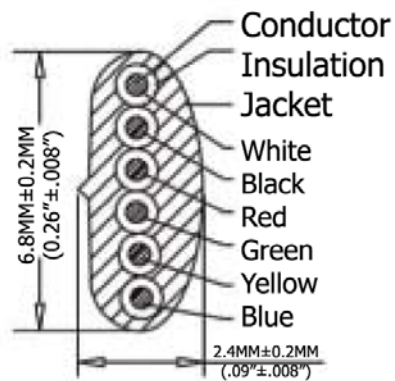

Conductor
Insulation
Jacket
White
Black
Red
Green
Yellow
Blue

P1	P2
1 WHITE	1
2 BLACK	2
3 RED	3
4 GREEN	4
5 YELLOW	5
6 BLUE	6

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	53.5 Inches
4,267.2MM-4,907.28MM	1,358.9MM

Material:

- Plug Housing: Polycarbonate, clear
- Plug Terminal: 0.36"[0.14MM] Thick Phosphor Bronze
- Connector: 50µ" of Selective Gold Contact Plating
 - Area, Gold flash over the remainder
 - Over 2.54µm[.000100] thick nickel underplate
- Conductor(X6C): 26AWG (0.12X12) Bare Copper
- Insulation(X6C): PP6331 ID 0.95-1.0
- Jacke: PVC No UL 80 P
- Package: Individual PE Bag

SBC: A=A

Scale	1:1					Name	Item No. AT-C-26-6/6/W-14/R
TOLERANCE					Drawn	11.02.11	
X.X	±0.40				Approved		Title NON-UL 26 AWG (0.12X12)*6C, O.D.: 2.4*6.8MM, Reverse Plug, 50µ" of contact plating, WHITE
X.XX	±0.25						
X.XXX	±0.15						Drawing No.
Angle	±3°						rev00
							Replace
							Sheet
			Modification	Date	Name	