
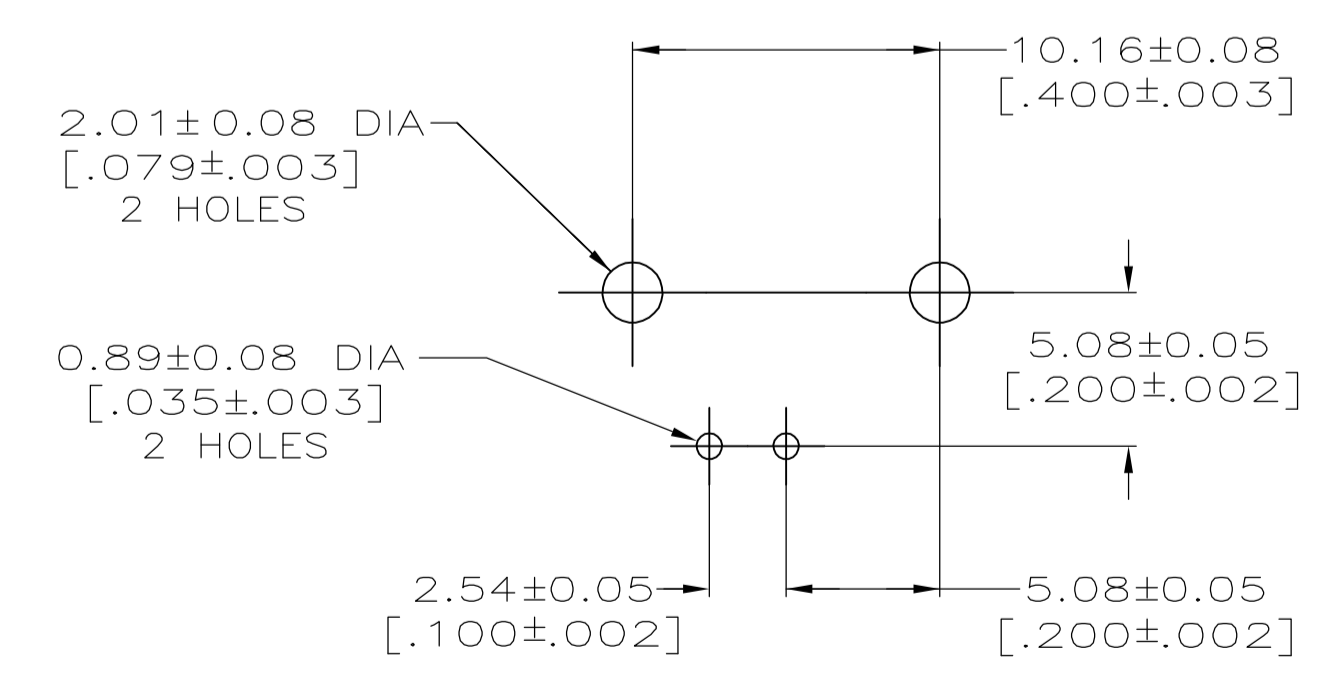
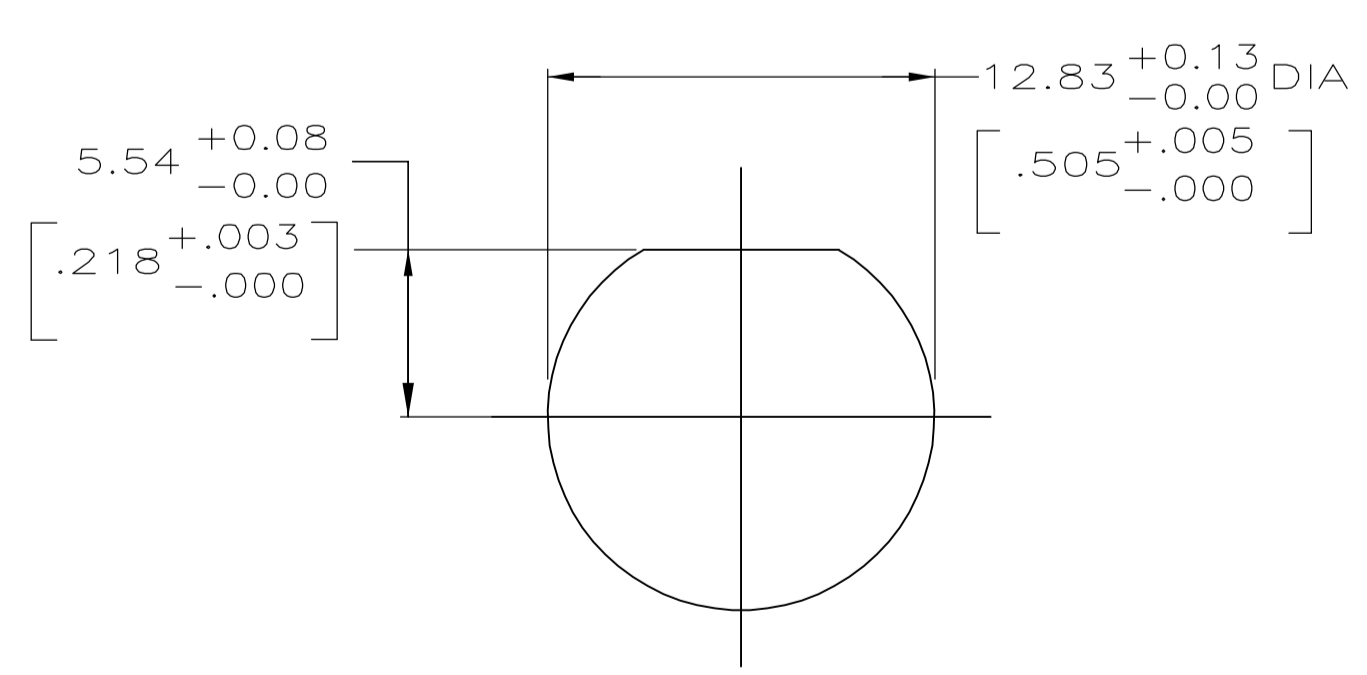
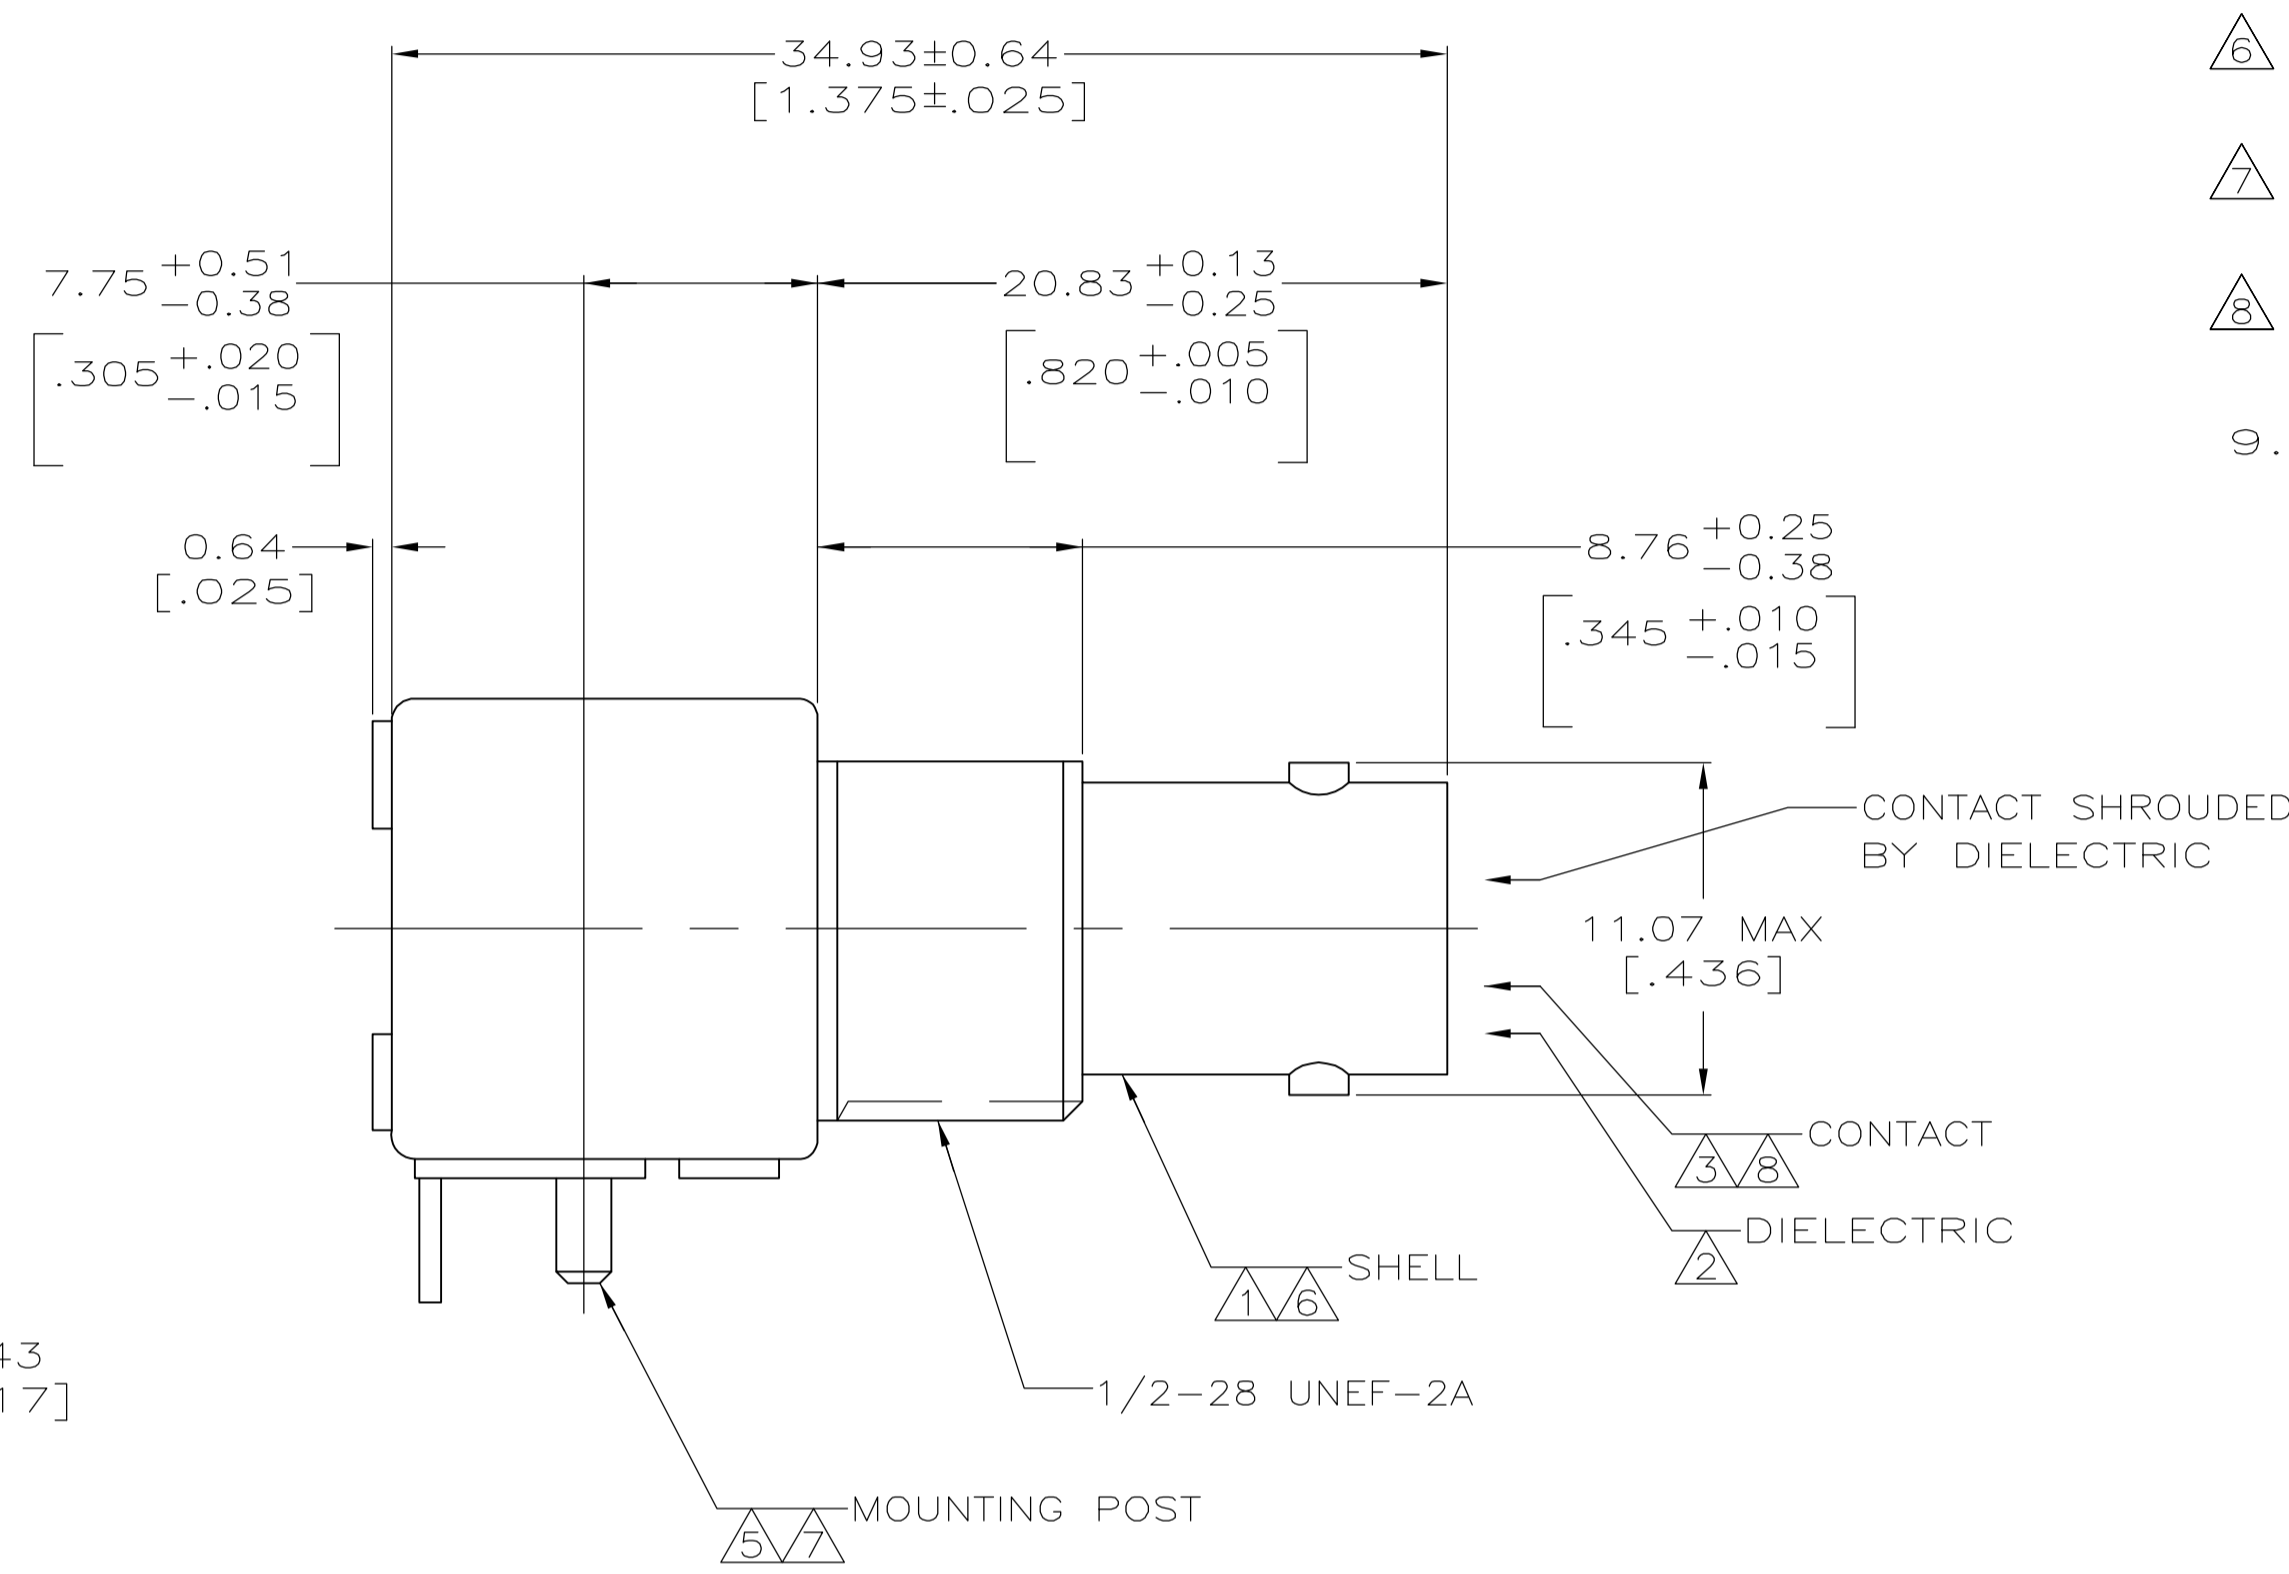


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
A		REVISED PER EC 0514-0150-05	04OCT2005	REH	JL		

- ① ZINC PER QQ-Z-363.
- ② POLYMETHYLPENTENE, GENERAL PURPOSE.
- ③ PHOSPHOR BRONZE PER QQ-B-750.
- ④ BRASS PER ASTM-B-453.
- ⑤ BRASS PER ASTM-B-16.
- ⑥ NICKEL PLATE PER QQ-N-290, 3.81 μm [.000150] MINIMUM THICK.
- ⑦ TIN PLATE PER ASTM-B-545, 3.81 μm [.000150] MINIMUM THICK.
- ⑧ GOLD PLATE PER ASTM-B-488, 0.76 μm [.000030] MINIMUM THICK.
- 9. SEE INSTRUCTION SHEET 408-2769.

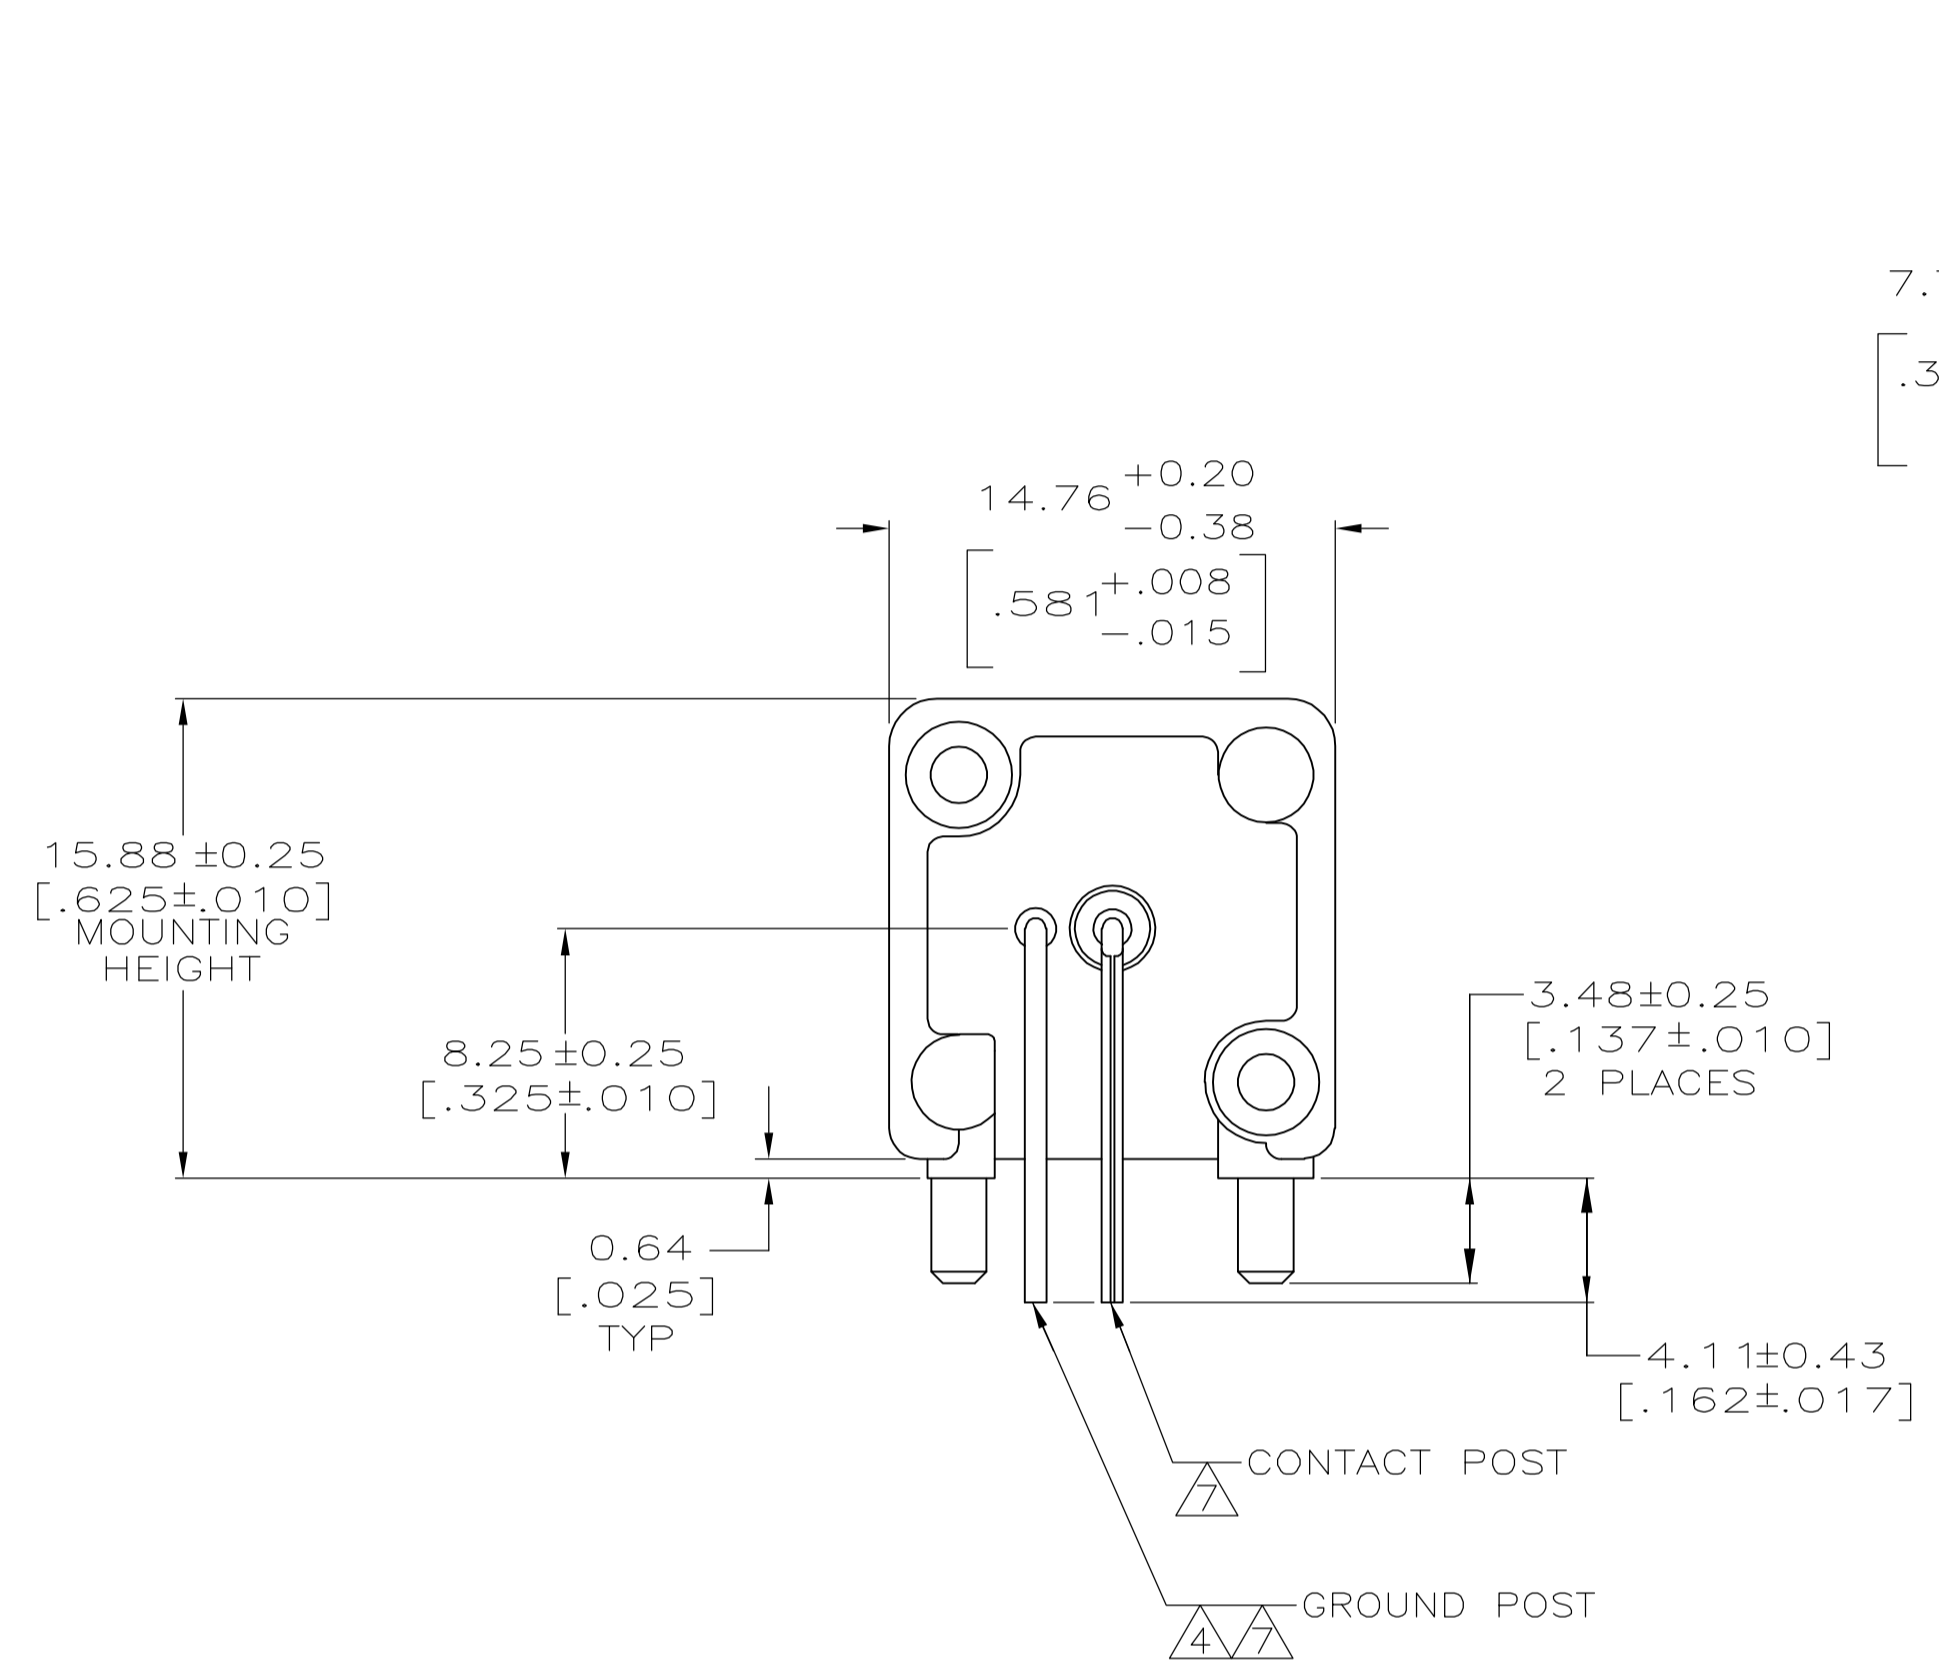

RECOMMENDED PANEL CUTOUT

PCB CONFIGURATION

5414409-1
 PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ALCORTA - 26APR2005		Tyco Electronics Corporation Harrisburg, PA 17105-3608																							
DIMENSIONS: mm [INCHES]		CHK J. HAVENER - 26APR2005		APVD J. LIPPERT - 26APR2005	NAME	JACK, RIGHT ANGLE, PCB 75 OHM, SERIES BNC																					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		<table border="1"> <tr><td>0 PLC</td><td>±</td><td>-</td></tr> <tr><td>1 PLC</td><td>±</td><td>-</td></tr> <tr><td>2 PLC</td><td>±</td><td>0.20 [.008]</td></tr> <tr><td>3 PLC</td><td>±</td><td>-</td></tr> <tr><td>4 PLC</td><td>±</td><td>-</td></tr> <tr><td>ANGLES</td><td>±</td><td>-</td></tr> <tr><td>FINISH</td><td>±</td><td>-</td></tr> </table>		0 PLC	±	-	1 PLC	±	-	2 PLC	±	0.20 [.008]	3 PLC	±	-	4 PLC	±	-	ANGLES	±	-	FINISH	±	-	PRODUCT SPEC 108-12078	APPLICATION SPEC	RESTRICTED TO
0 PLC	±	-																									
1 PLC	±	-																									
2 PLC	±	0.20 [.008]																									
3 PLC	±	-																									
4 PLC	±	-																									
ANGLES	±	-																									
FINISH	±	-																									
MATERIAL SEE NOTES 1 - 5		WEIGHT -		SIZE A1	CAGE CODE 00779																						
CUSTOMER DRAWING		DRAWING NO 5414409		SCALE 4:1	SHEET 1 of 1																						