


NOTES: UNLESS OTHERWISE SPECIFIED

1. P/N: XRCOLOR
HOUSING & PLUNGER: MOLDED NYLON TYPE 6,6.
AVAILABLE IN TEN COLORS.
CONTACT BLADE: BERYLLIUM COPPER PER QQ-C-533. GOLD PLATED PER MIL-G-45204 B TYPE 1 0.00001 [0.000254] THICK MINIMUM.
SPRING: STAINLESS STEEL TYPE 302.

2. P/N: 9260CCOLOR
HOUSING: MOLDED NYLON. AVAILABLE IN TEN COLORS.
FRAME: BRASS. NICKEL PLATED.
CONTACT: BeCu OR PHOSPHOR BRONZE. NICKEL PLATED.

3. P/N: W-600/COLOR
18AWG 65X36 TINNED COPPER
0.144 [3.66] O.D. PVC INSULATION
AVAILABLE IN TEN COLORS.

4. PERFORMANCE
MAXIMUM CURRENT: 4.0 AMPS
MAXIMUM VOLTAGE: 5000 W.V.D.C.
MAXIMUM TEMPERATURE: 221°F (105°C)

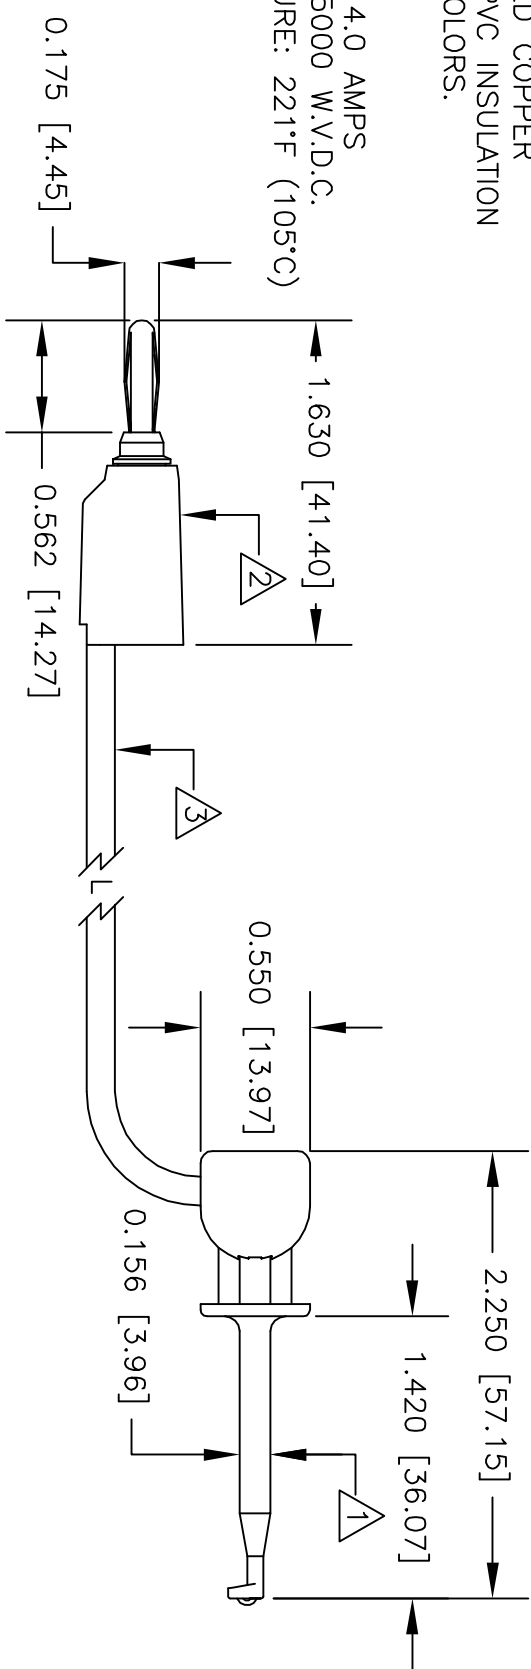

LTR	DESCRIPTION	REVISIONS	DATE	APPROVED

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ± .XX ± ± .XXX ± ±		CONTRACT NO.		DESCRIPTION	
MATERIAL SEE NOTE.		APPROVALS		MINI-HOOK (XR) TO	
FINISH SEE NOTE.		DRAWN R.L.		STK BANANA PLUG (9260)	
APPLICATION USED ON		DATE 10/10		SIZE CODE IDENT NO. DRAWING NO.	
DO NOT SCALE DRAWING		APPROVED BY		A 08505 601XR	
				SCALE 1:1	
				SHEET 1 OF 1	
				REV.	

EZ-HOOK DIVISION OF TEKTEST INC. ARCADIA, CA 91006 U.S.A.