

PERFORMANCE CHARACTERISTICS


CURRENT RATING
 1.5 A AT 20°C (FULLY LOADED)
 1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)
 OPERATING TEMPERATURE -55°C TO 125°C
 CONTACT RESISTANCE 20 MΩ MAX
 INSERTION FORCE :0.75 N MAX /CONT
 EXTRACTION FORCE: 0.15 N MIN /CONT
 INSULATION RESISTANCE :10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG No. BSC201844,003)
- THIS PRODUCT IS CSA APPROVED THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

LAY OUT
 P.C.B.-HOLE

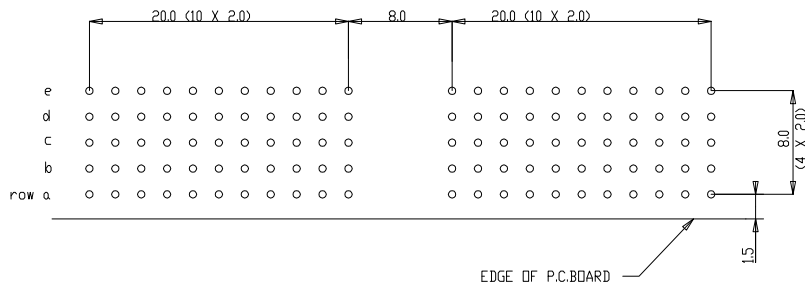

Material		Spec ref		tolerance	projection	MM
Mat code				±0.10	±0.10	
Heat treat				±0.10	±0.10	
Plating/Finish						
rev	ecn no	dr	date	Dr	date	Product family
A	DG10-0354	NZ	2010.5.30	Nickor Zuo	2010-5-30	MILLIPACS
				Eng	Collins Lu	2010-5-30
				Ch	PM Zheng	2010-5-30
				Appr	Joseph Hsia	2010-5-30
				Model Name		size
				Model Revision		Scale
				REL Level		Rev.
				MPACS 5+2R RA RCP		BSC201908008
				CONN TYPE A		A
				HMERIDPFA5100--J--		CUSTOMER DRAWING
				Prv/E file		catalog no
				sheet 1 of 1		