
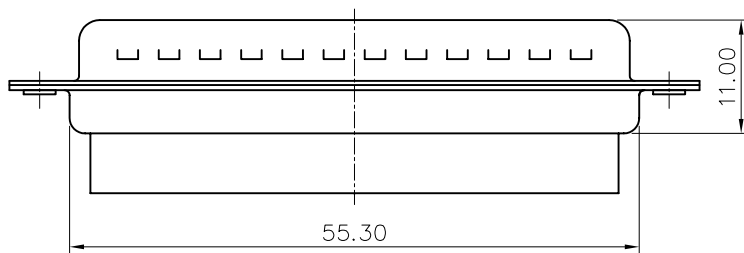



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

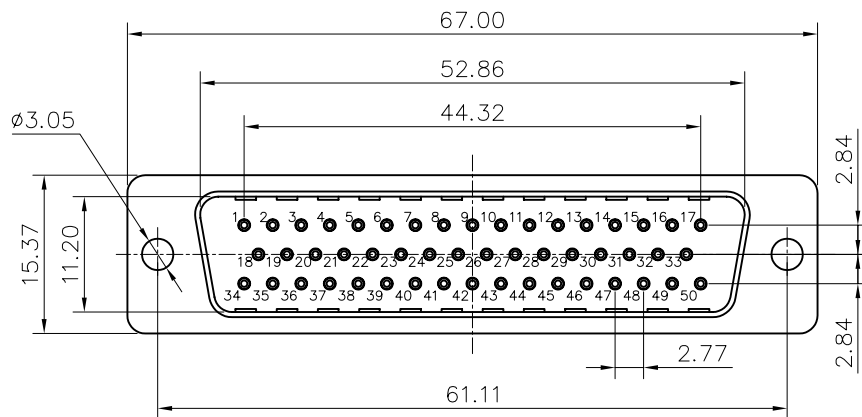

Customer drawing

REVISIONS


SYM	ECN	DESCRIPTION	DATE	APPROVED
1			07/24/08	

D-SUB TECHNICAL DATA

SHELL : Steel, 2.5um (100u") min tin over 1.25um (50u") min nickel  
 BODY : Glass filled thermoplastic.  
 Flame retardant to UL94 V-0 Color Black  
 ELECTRICAL : Voltage rating : 500 V RMS at 50 Hz  
 Insulation resistance >5000 M Ohms  
 CLIMATIC : Temperature range -55 °C up to 125°C  
 MARKING : Amphenol-...(Series No.)  
 Commercial reference  
 Manufacturing date

PRODUCT CODE

L 777RR D 50 P

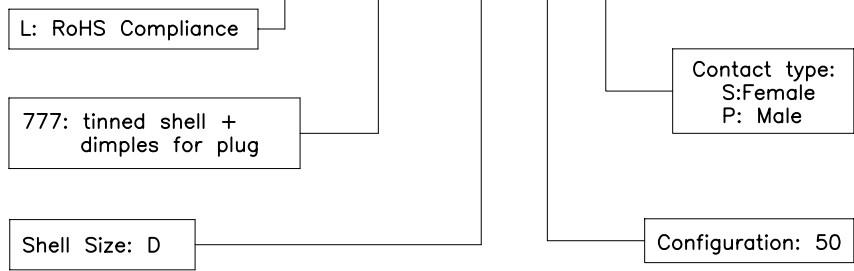

UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVAL		DATE
U.S.	METRIC	DRAWN	Meng.ma	07/24/08
.X +/-	0.50	CHECKED	kk.wang	07/24/08
.XX +/-	0.30	CHECKED		
.XXX +/-	0.20			
FRACTIONS +/-				
ANGLES +/-	5°			
FOR MATERIALS AND FINISHES SEE NOTES		DRAWING FILE :		
REMOVE SHARP EDGES		ANGLE OF PROJECTION		
DIMENSIONS				
U.S.	INCHES			
METRIC	MM			

Amphenol®

TITLE		stamped and formed connector, RR series	
SIZE	DRAWING NO.	REV.	
A4	C L777RRD50P	1	
SCALE	NONE	SHEET 1 OF 1	