


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART #	STUD SIZE		DIMENSIONS in. [mm]				
	ENGLISH	METRIC	L ± .03 [0,76]	W ± .01 [0,25]	C ± .02 [0,51]	M ± .03 [0,76]	H ± .01 [0,25]
PN10-6F	#6	M3,5	1.00 [25,4]	.31 [7,9]	.24 [6,1]	.81 [20,6]	.15 [3,8]
PN10-8F	#8	M4	1.03 [26,2]	.37 [9,4]	.24 [6,1]	.81 [20,6]	.17 [4,3]
PN10-10F	#10	--	1.04 [26,4]	.37 [9,4]	.24 [6,1]	.81 [20,6]	.20 [5,1]
PMN6-5F	--	M5	1.01 [25,7]	.38 [9,5]	.24 [6,1]	.79 [19,9]	.21 [5,3]
PN10-14F	1/4"	M6	1.14 [29,0]	.49 [12,5]	.32 [8,1]	.90 [22,9]	.27 [6,9]

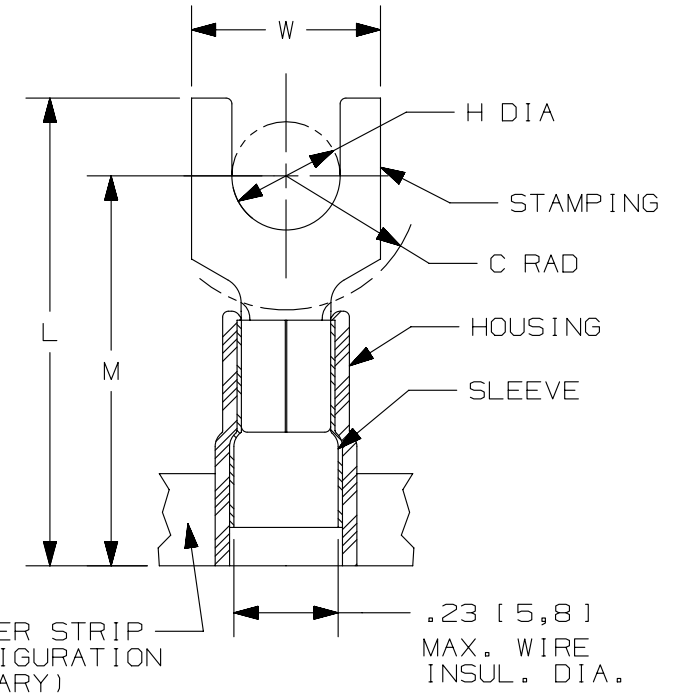

NOTES:


- USED FOR:
  - A. #12-10 AWG [4,0-6,0 mm<sup>2</sup>] SOLID OR STRANDED COPPER WIRE
  - B. 221°F [105°C] MAX. OPERATING TEMPERATURE
  - C. 600 V. MAX. VOLTAGE RATING
- INSTALLATION TOOLS:
  - A. PRESSES: CP-861, CP-862, CP-871
  - B. APPLICATOR: CA-800EZ, CA9
  - C. DIE INSERTS: CD-800-3, CD9-3A
- WIRE STRIP LENGTH: 9/32 <sup>+1/32</sup> [7,1<sup>±0</sup>]
- MATERIAL:
  - A. STAMPING: .04" [1,0] THK COPPER, TIN PLATED
  - B. HOUSING: NYLON, YELLOW
  - C. SLEEVE: BRASS, TIN PLATED
- SEE [www.panduit.com](http://www.panduit.com) FOR PACKAGE QUANTITIES INDICATED BY PART NUMBER SUFFIX
- DIMENSIONS IN BRACKETS ARE METRIC EQUIVALENT



LISTED  
587H  
E52164



CERTIFIED  
LR31212



REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
06	09.12.12	JBN	LCA	VMB	ADDED METRIC EQUIVALENT. REVISED NOTES. UPDATED DRAWING TO CURRENT STANDARDS.	A41094

TITLE <b>FORK TERMINALS, 3 PC. NYLON INSULATED, #12-10</b> CUSTOMER DRAWING	
ITEM REVISION NAME N41094BA/06	<b>PANDUIT</b>
DATASET FILE NAME N41094BA_DC/06A	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± .1 [2.54]      .xxx ± .005 [.13] .xx ± .01 [.25]      ANGLES ± 5°	
MATERIAL: <b>SEE NOTES</b>	
DRAWING NUMBER: A41094	
DRAWN BY JMV	DATE -
CHK LA	SCALE N.T.S.
SHT 1 OF 1	
SIZE A	

D10100DA/15