
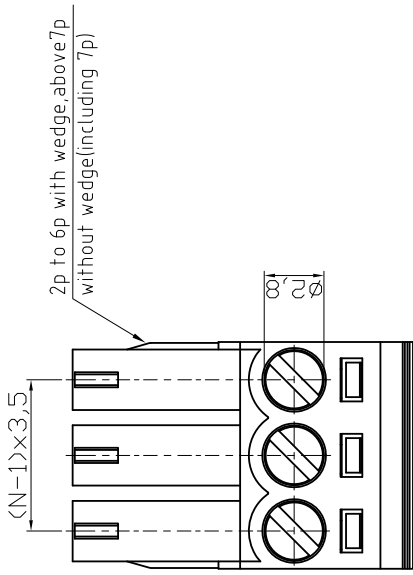
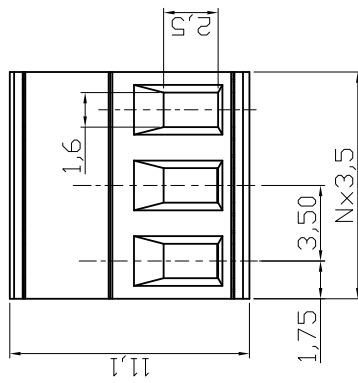
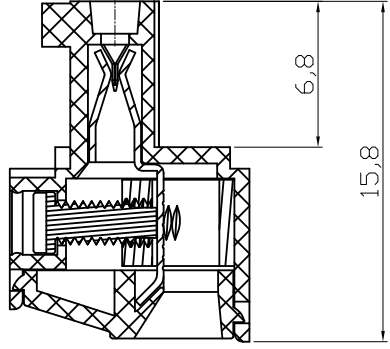


	1	2	3	4	5	6	7
A	<p>Material</p> <p>Terminal body (metal housing): Brass(CuZn)  Insulator (housing): Thermoplastic (UL94V-0), Green  Wire guard: PhBz, Tin plated  Terminal screw :Steel Zinc plating"-slot type  Electrical cULus/ CSA /VDE  Voltage rating: 300VAC/125VAC/300VAC  Current rating: 10A/8A/10.5A  Wire range: 1.5mm<sup>2</sup>  Solid wire(AWG): 16-26/16-26  Stranded wire(AWG): 6-26/16-26  Torque: 3Lb-In / 3.5kgf.cm / 0.2N.m  Screw: M2  With strip length:6-7mm  Withstanding Voltage: 1.6KV/1.6KV/2.5KV  Operating temperature: -30°C to +105°C  Safety Approval: </p>						
B							
C							
D							
E	<p>N= NUMBER OF CONTACTS</p>						
F	<p><b>RoHS compliant</b></p>						
G	Scale	1:1					Customer-No.
	TOLERANCE					Name	
	X.	±0.50	Drawn	10.12.2009	Dean	Dean	
	X.X	±0.30	Approved	10.12.2009	Hellwig	Hellwig	
	X.XX	±0.10					
	DIM	TOL					ASSMANN WSW-No.
	X.°	±1°					A-TB350-TJxxU
	Angle	TOL					Drawing-No.
			① Drawn	10.12.2009	Dean	ASS 3822 CO	
						rev01	
H						Replace	Sheet
	1	2	3	4	5	6	7

