


1			2			3			4			5			6			7		
PLUG COMPONENT			PLUG STRIP DIMENSION						END STRIP DIMENSION			CONNECTOR COMPONENT								
COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR	SJT 18AWGx3C			R.O.J	R.I.J	COLOR	COLOR	DESCRIPTION							
40P BLACK	PVC Compound	1	6 ⁺¹ ₋₀	19 ± 1	BLACK(L)	60°C Unshielded Black			15 ± 1	6 ⁺¹ ₋₀	BLACK(L)	40P BLACK	PVC Compound	1						
Gray color	Assembly Body 111-003-001	1	6 ⁺¹ ₋₀	19 ± 1	WHITE(N)				Length 2000±50			15 ± 1	6 ⁺¹ ₋₀	WHITE(N)	True color	Assembly Body 111-001-005	1			
			6 ⁺¹ ₋₀	19 ± 1	GREEN(E)				15 ± 1	6 ⁺¹ ₋₀	GREEN(E)									

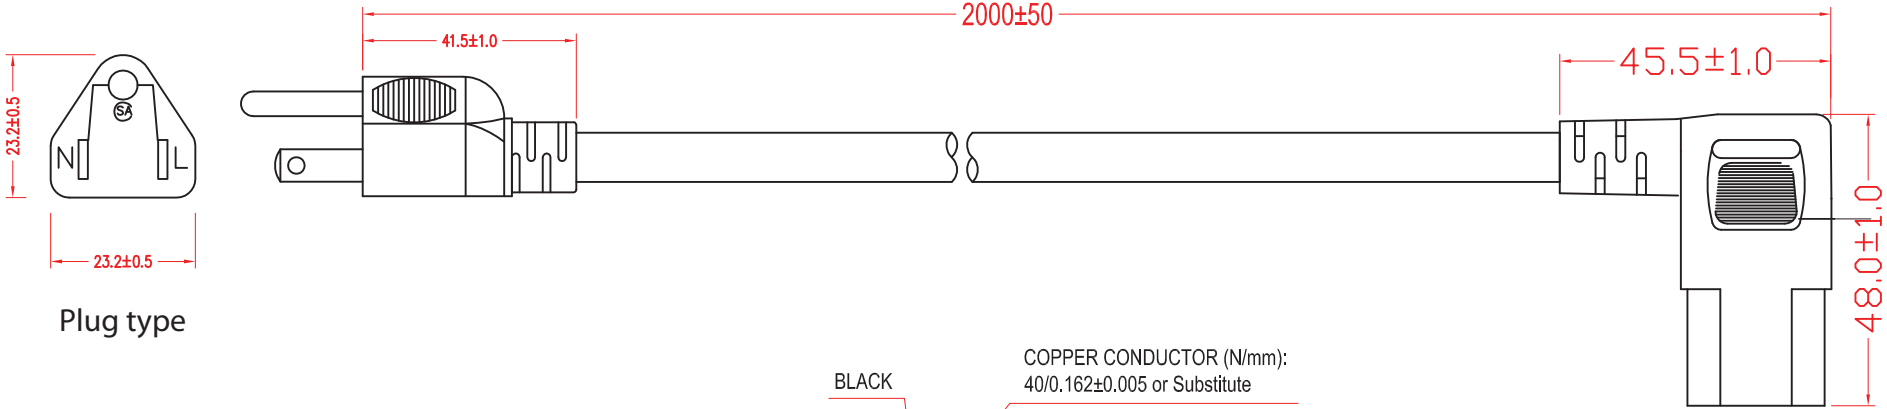


Material:


- SJT 3 x 18AWG(0.824mm²) VW-1, 60°C 300V
- Jacket Color: Black
- E - Green; L - Black; N - White

Electrical:

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (min.)
- Voltage: 500V DC / 1 minute

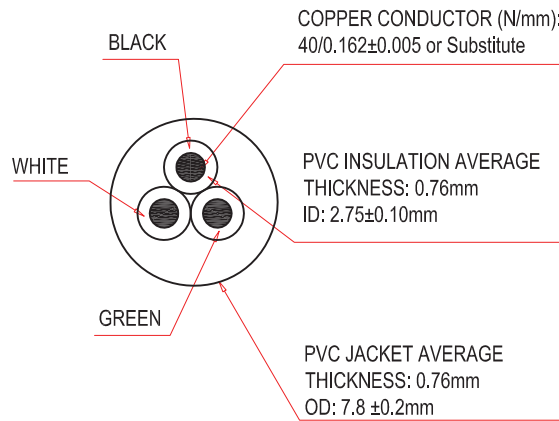

Wire Cross section

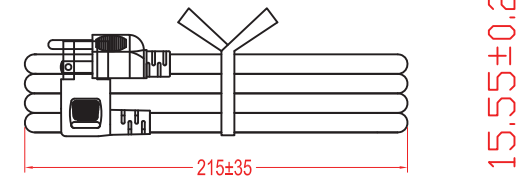

Hank Dimension

Unit: mm



Scale	Free				Date	Name	Title	
TOLERANCE					Drawn	Wilson	Power cord - SJT Right Angle	
X.	±X				10.10.15		5-15P ⇔ 320C13, 60°C 18AWG, 2 Meters	
X.X	±X				Approved	Groll	ASSMANN WSW-No.	
X.XX	±X						A-PC2304-020028-1	
DIM	TOL						Drawing-No.	
X.°	±X°							rev00
X.X°	±X°							
Angle	TOL	Id.	Modification	Date	Name	Replace	Sheet	
							1/1	



1			2			3			4			5			6			7		
---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--