

PANDUIT P/N	WEIGHT
ACB04	0.1kg

**SPECIFICATION:**

**1. STANDARD**

OPERATING TEMPERATURE RANGE:	0°C TO 65°C [32°F TO 149°F]
OPERATIONAL VOLTAGE:	5 ±0.1 VOLTS
CURRENT DRAW:	30 mA MAX
INTERFACE PLUG 1 (ACCESS HUB):	H.R A2006 SERIES 2.0mm PITCH SINGLE ROW CONNECTOR 10 CIRCUITS
INTERFACE PLUG 1 HOUSING MATERIAL:	NYLON
INTERFACE PLUG 1 HOUSING COLOR:	WHITE
INTERFACE PLUG 2 (ELECTONIC LOCK):	HIROSE DF11 SERIES 2.0mm PITCH DOUBLE ROW CONNECTOR CRIMPING SOCKER, 6 CIRCUITS
INTERFACE PLUG 2 HOUSING MATERIAL:	NYLON
INTERFACE PLUG 2 HOUSING COLOR:	BLACK

**2. ADDITIONAL:**

NONE

**3. ACCESSORY COMPONENTS:**


INSTALLATION GUIDE, QTY:(1)

**NOTES:**

1. PRIMARY DIMENSIONS ARE IN MILLIMETERS. SECONDARY DIMENSION ARE IN INCHES
2. INSTALLATION SHALL COMPLY WITH ALL APPLICABLE NATIONAL, STATE, AND LOCAL CODES
3. VISIT OUR ON-LINE CATALOG AT [WWW.PANDUIT.COM](http://WWW.PANDUIT.COM) FOR A CURRENT LIST OF PRODUCTS APPLICABLE FOR USE WITH THIS PART

**IDENTIFICATION**

PART NUMBER	DESCRIPTION
ACB04	HARNES FOR ACE01 - COLD AISLE

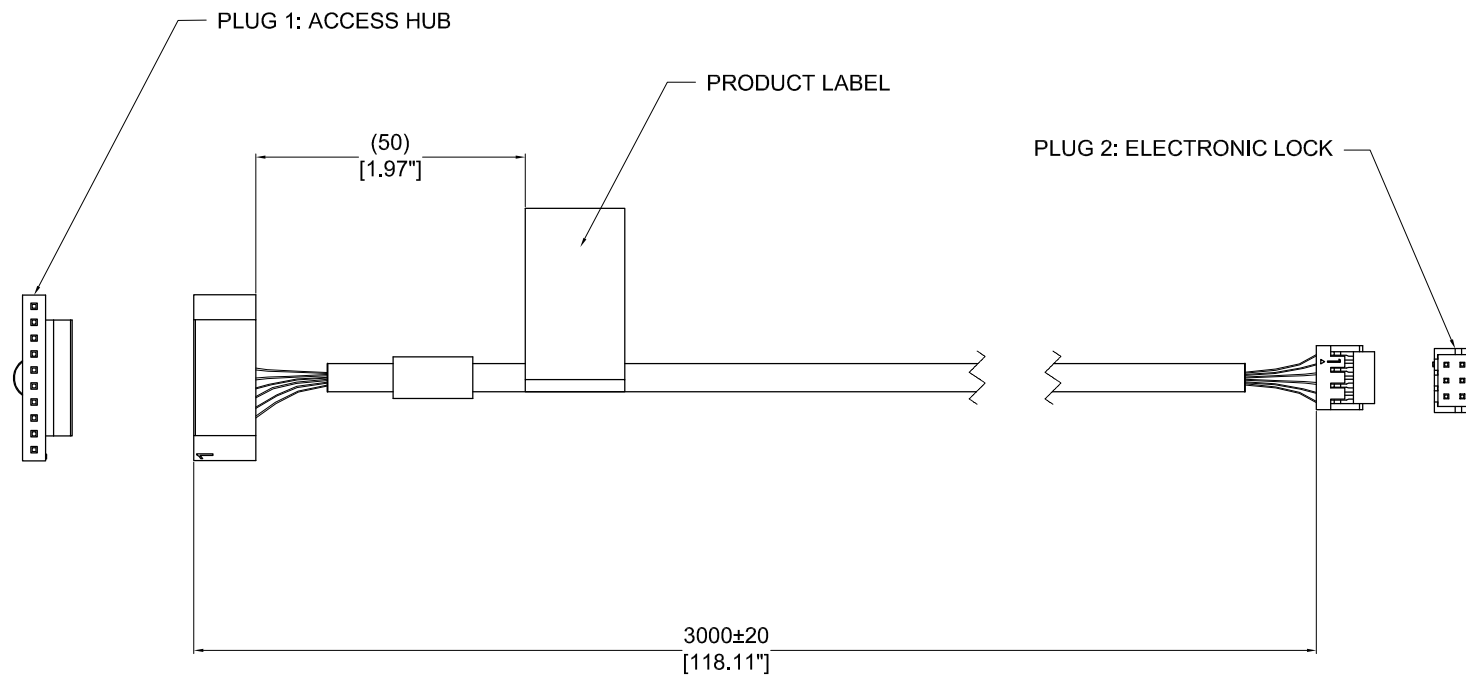

00A	01/04/2018	Felix	MM	DJB	INITIAL RELEASE	ACB04				
REV	DATE	BY	CHK	APR	DESCRIPTION	ECN				

WE ASK THAT YOU CHECK FULLY THE DIMENSIONS, NOTES, AND SIGN THE CLIENT SIGNATURE BOX. THE JOB WILL NOT PROGRESS WITHOUT SIGNED APPROVAL. PLEASE DO NOT DELAY IN RETURNING PROOF AS IT WILL AFFECT DELIVERY		SIGN	
		DATE	
		PRINT	
TITLE: SMARTZONE G5 HARNES FOR ACE01 – COLD AISLE CUSTOMER DRAWING			
ITEM REVISION NAME:			
DATASHEET FILE NAME:			
UNLESS OTHERWISE SPECIFIED DIMENSIONAL TOLERANCE ARE: mm [IN] Wire Harness Tolerance(mm)		MATERIAL/COLOR: N/A	
THIRD ANGLE PROJECTION		DRAWING NUMBER: ACB04_DC	
DRAWN BY	DATE	CHK	SCALE
Felix	01/04/2018	MM	NONE
SHT 1 OF 1			SCALE B