


- NOTES:
1. UL LISTED AND CSA CERTIFIED. DUAL RATED CU9AL FOR ALUMINUM OR COPPER CONDUCTORS. MEETS OR EXCEEDS ANSI C119.4
  2. WIRE RANGE: 350 kcmil - #10 AWG. ONLY ONE CONDUCTOR PER PORT ALLOWED.
  3. STRIP LENGTH: 1.06 +.06/-0
  4. HEX KEY SIZE: 5/16", TIGHTENING TORQUE 275 IN-LB.
  5. VOLTAGE RATING: 600 V. MAX.
  6. TEMPERATURE RATING: 90° C.
  7. CONNECTOR BLOCK BODY IS MADE FROM ALUMINUM. CLAMPING SCREWS ARE TIN PLATED. PORTS IN CONNECTOR BLOCK ARE PREFILLED WITH AN OXIDE-INHIBITING COMPOUND.
  8. INSULATION MATERIAL IS CLEAR PVC.
  9. CLAMPING SCREW ACCESS PORTS AND ALL CONDUCTOR ENTRY PORTS ARE PROVIDED WITH REMOVABLE PLASTIC CLOSURE PLUGS.
  10. ALL DIMENSIONS SHOWN ARE NOMINAL.
  11. PACKAGE QTY: -2 = 2 PCS  
-1 = 1 PCS
  12. THIS PART IS ROHS COMPLIANT.

PART NUMBER	# CONDUCTOR PORTS	DIM "L"	DIM "A"
PCSBMT350-4S-2Y	4	6.17	5.00
PCSBMT350-6S-2Y	6	8.17	7.00
PCSBMT350-8S-2Y	8	10.17	9.00
PCSBMT350-10S-1Y	10	12.17	11.00
PCSBMT350-12S-1Y	12	14.17	13.00

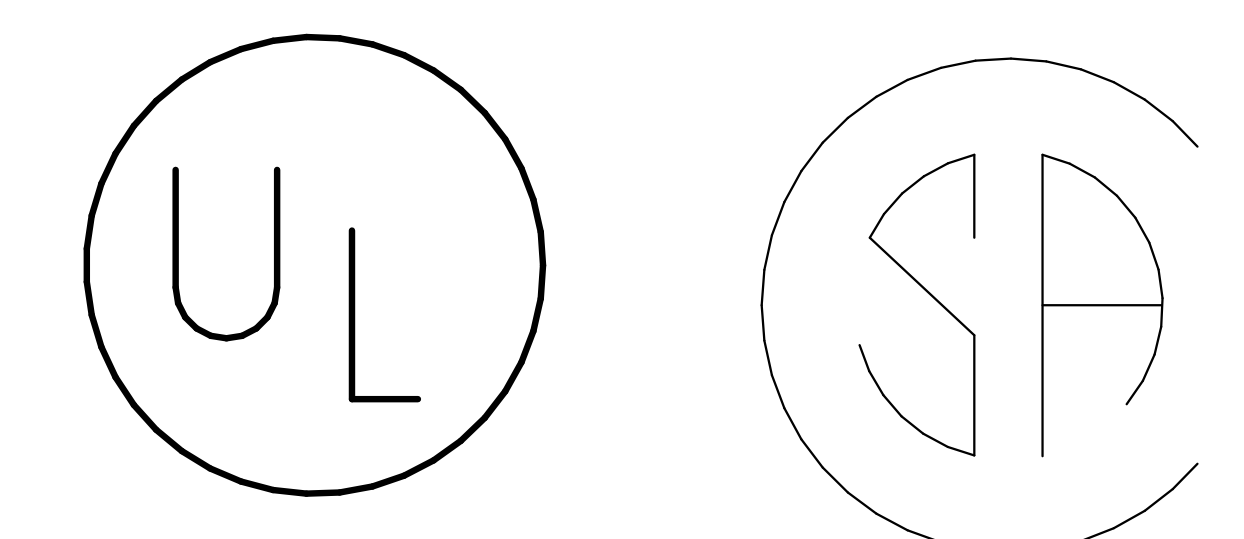

00	3/06	JHNU	LEM	DRAWING RELEASED - ROHS COMPLIANT	PC00353				
REV	DATE	BY	CHK	DESCRIPTION	ECN #	CUST	PM		

C41537\_00

**PANDUIT** CORP. TINLEY PARK, ILLINOIS

MULTI-TAP INSULATED CONNECTORS  
WITH MOUNTING HOLES  
PCSBMT 350 SINGLE SIDED SERIES

DRAWN BY	CHK'D	SCALE	DRAWING NO.
JHNU		N/A	C41537