
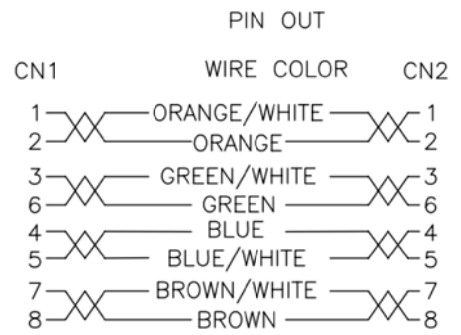


Order code: A-MCUP-80xxx Order color: Grey  
 Order code: A-MCUP-80xxx/x

Length Code	Length (M)
005	0.5
010	1
020	2
030	3
050	5
070	7
100	10
150	15
200	20
300	30

Order color:  
 R: Red  
 Y: Yellow  
 G: Green  
 B: Blue

Tolerance		
Length (M)	Max-M	Mix-M
0.5	0.03	0.025
1	0.04	0.035
L≥2	L x 3%	L x 3%

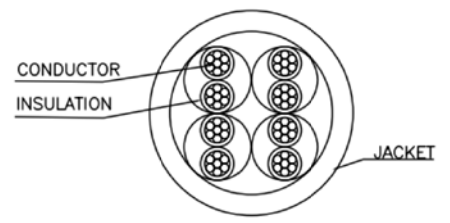

**Electrical**  
 Open/short/intermittence:100%  
 The operating temperature: -20°C~+60°C  
 The storage temperature: -20°C~+60°C

③	Molding PVC	2	Molding PVC 45P
②	RJ45 CONN	2	RJ45 8P8C, Two Fork gold plated contacts 3u" gold
①	CABLE	1	UTP(26AWG*x1PR)*4+PVC OD:4.9±0.2mm
NO.	NAME.	Q'TY	SPECIFICATION

**RoHS compliant**  
 Unit: mm

Scale	FREE				Date	Name	Customer-No.
TOLERANCE				Drawn	25.05.2014	Joanna	ASSMANN WSW-No. <b>A-MCUP-80xxx/x</b>
				Approved	04.08.2017	Fred	
DIM	TOL	①	Add the product type of length and color	04.08.2017	Fred	Drawing-No. <b>ASS 7407 CA</b> rev01	
		②	Drawn	25.05.2014	Joanna	Replace Sheet	
Angle	TOL	Id.	Modification	Date	Name		

