



5

4

3

2

1

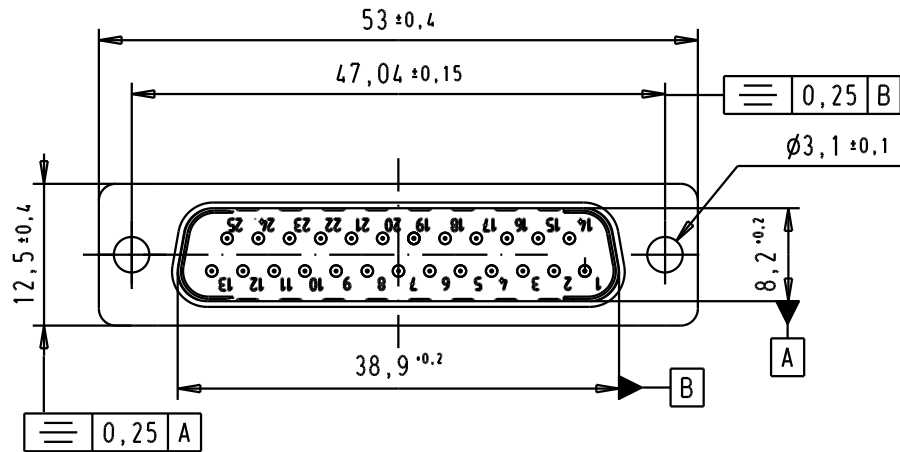




Solder buckets for AWG 20

## SPECIFICATION

Mating Cycles	500
Filter type	C
Capacitance	470pF ± 20%
Working Voltage	100V
Current Rating	7.5A
Insulation Resistance	>1GΩ

FREQUENCY (MHz)	ATTENUATION dB
5	-
10	1dB
50	10dB
100	15dB
500	35dB
1000	32dB

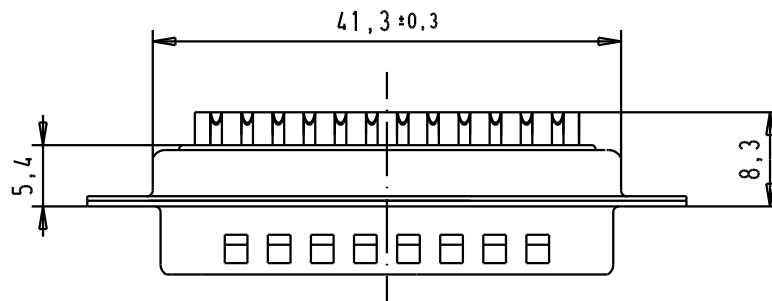

Mod.	Dat.	Name	Detail.	Dat.	Name	 All Dim. in mm Orig. Size DIN A 4	D-Sub, male, Straight 25 Poles, turned solder buckets, tin plated shell with dimples and holes	Mo?MsLab/ Scale 1.5:1
33423	06/02/06	JMDR	Insp.	8-JUL-02	CV			
31058	8-JUL-02	CV	Stand.					
HARTING EURL F-95972 Paris					TB 09643217220		Blatt / Page 1 / 1	