


DESIGNED FOR USE WITH RG 316/U & SIMILAR CABLES	
CABLE ENTRY DIAMETER MINIMUM	
HOUSING	.067
FERRULE	.125
CONTACT	.023

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
02 ₀	CHG'S PER ECN 86-0048-2	D.CAM 2/7/86	R.GIERAS
03 ₀	CHANGED PICTORALLY, ECN 86-0355 (6 OF 7)	M.B. 5/20/86	R.GIERAS
03 ₁	REDRAWN IN CAD PER ECN 92-0008	J.B. 2/26/92	JGH 2/27/92
B	REVISED PER ECN 0U20-0262-01	G.V. 12/10/02	JGH

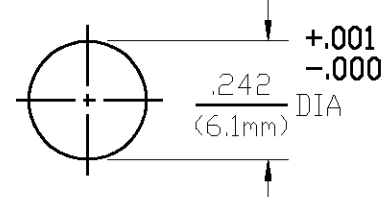

RECOMMENDED MOUNTING HOLE

HOUSING MOUNTING NUT LOCKWASHER	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	PASSIVATE PER ASTM-A380
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550
"O" - RING	FLOUROSILICONE PER MIL-R-25988, CLASS I, TYPE I.	N/A
SHRINK TUBING	HEAT SHRINKABLE POLYOLEFIN COMPOUND MIL-I-23053/4	N/A
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204 OVER COPPER PLATE PER MIL-C-14550

COMPONENT	MATERIAL	FINISH
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1° These drawings and specifications are the property of Danni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		
DRAWN BY T.MCW DATE 12-3-82 CHECKED BY R.G. 12-3-82 APP'D BY RMF 12-7-82		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599
USE ASSY PROCEDURE 408-08271 (45-018) NO. A.P. _____		TITLE DSP BULKHEAD FEEDTHROUGH CABLE PLUG - CRIMP ATTACHMENT SIZE B CODE IDENT NO. 26805 4533-7388-02 REV 03 ₁ SCALE 3:1 SHEET 1 OF 1

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) 50	Interface Dimensions Per OMNI SPECTRA CATALOG	TEMPERATURE RATING -65° TO +125°C
Frequency Range (GHz) DC to 3	Force to Engage (In-Lbs MAX) 3.0 & Disengage (In-Lbs MAX) 1.5	Vibration MIL-STD-202, Method 204, Condition D, 20Gs
Volt Rating (VRMS MAX) @ Sea Level 250	Center Contact Captivation Axial (Lbs) 6.0	Shock MIL-STD-202, Method 213, Condition I, 100Gs
VSWR 1.15±.01F(GHz) DC to 3 GHz	Cable Retention Axial Force (Lbs MIN) 20.0	Thermal Shock MIL-STD-202, Method 107, Condition B
Insertion Loss (dB MAX) .06x√F(GHz)	Weight (Grams) TBD	Molsture Resistance MIL-STD-202, Method 106
RF Leakage (dB MIN) (Fully Mated) -60-F(GHz)		Corrosion - MIL-STD-202, Method 101, Condition B
Corona, 70,000 Ft (VRMS MIN) 190		
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 750		
Contact Resistance (Milliohms MAX)		
Center Contact 2.0		
Outer Contact 2.0		
Cable to Housing 0.5		
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 500		
I.R.(Megohms MIN) 5000		

CUSTOMER DRAWING

AMP PART # 1059523-1
SHEET 1 OF 1 REV B