

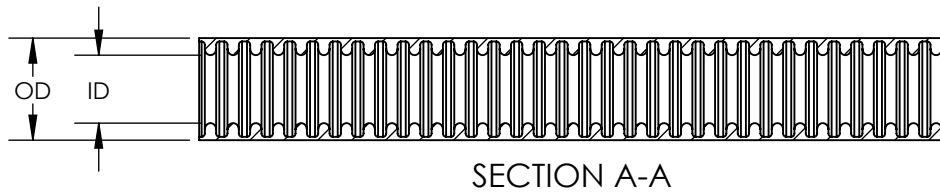


SW2014

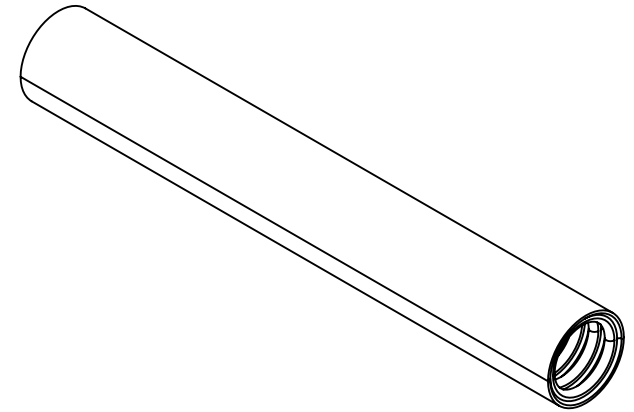

Revision level			Revision Record	Changed	Date	Approved	Date
Drawing	State	Part					
00.0	Design Release		SEE ECN# 013638	GRW	11/30/2016	KAC	11/30/2016

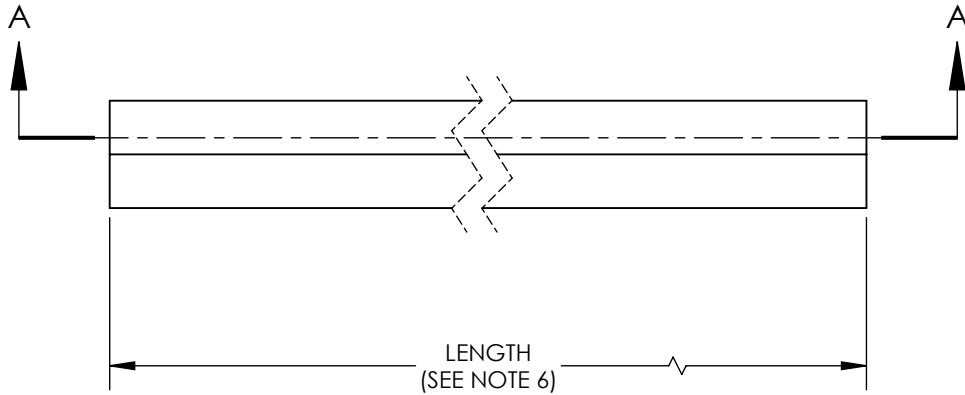

Conduit Nominal Size		HellermannTyton Item Number	Man'f Part Reference	Outside Dimension (OD)		Inside Dimension (ID)		Minimum Bend Radius	
inches	mm			in	mm	in	mm	in	mm
1/4	10.0	LTP10#-50M	LTP10#	0.46	11.8	0.28	7.0	1.38	35.0
5/16	12.0	LTP12#-50M	LTP12#	0.56	14.2	0.39	10.0	1.57	40.0
3/8	16.0	LTP16#-25M	LTP16#	0.70	17.8	0.50	12.6	1.77	45.0
1/2	20.0	LTP20#-25M	LTP20#	0.83	21.1	0.63	16.0	2.56	65.0
3/4	25.0	LTP25#-25M	LTP25#	1.04	26.4	0.83	21.0	3.94	100.0
1	32.0	LTP32#-25M	LTP32#	1.30	33.1	1.04	26.5	5.31	135.0
1-1/4	40.0	LTP40#-10M	LTP40#	1.65	41.8	1.39	35.4	6.89	175.0
1-1/2	50.0	LTP50#-10M	LTP50#	1.89	47.9	1.59	40.4	9.05	230.0
2	63.0	LTP63#-10M	LTP63#	2.35	59.7	2.03	51.6	11.02	280.0

- NOTES:
 1. FLAMMABILITY SELF-EXTINGUISHING (EN613861)
 2. OPERATING TEMPERATURE -4° F TO +221° F (-20° C TO +105° C)
 3. RoHS
 4. USE WITH HELAGUARD LTP OR LTPUL SERIES METALLIC FITTINGS FOR IP66 + IP67 + IP68 + IP69 RATINGS
 5. MANUFACTURED TO UL360 REQUIREMENTS
 6. CONSULT FACTORY OR WEBSITE FOR AVAILABLE LENGTHS

Material GALVANIZED STEEL & PVC	Units: inches	The copyright of this drawing is reserved by HellermannTyton. It is issued on condition that it is not reproduced, copied, or disclosed to a third party, either wholly or in part, without the consent of HellermannTyton.	Drawn	GRW	11/30/2016	Article/Type-No	LTP SERIES		Scale	
	Dimension without tolerances details to: .xxxx = ±.0005 .xxx = ±.005 .xx = ±.01 .x = ±.03 None = ±.06 ∠ = ±0.5° Dimension Formatted in/[mm]		Approved	KAC	11/30/2016	Title	HELAGUARD FLEXIBLE METALLIC GALVANIZED STEEL CONDUIT, LIQUID-TIGHT JACKETED PVC COVER		Project Number PRP 16-1961	
	HellermannTyton North America Email: corp@htamericas.com Web: www.hellermann.tyton.com			Drawing-No	PRODUCTION : Phase		Format AH			
				16-1961-001-CSU			Sheet 1/1			