

1 MATERIAL & FINISH
 SHELL: DIE CAST ALUM. ALLOY PER FED SPEC QQ-A-591
 FINISH: CAD. PLATED PER QQ-P-416, TYPE I, CLASS 2
 YELLOW CHROMATE CONVERSION.
 INSULATOR, HARD: EPOXY PER MIL-M-24325.
 INSULATOR, SOFT: FLUOROSILICONE RUBBER, COLOR: BLUE.
 GROMMET PROTECTOR: ALUM. ALLOY, FINISH: BLUE EPOXY.
 SCREWS AND WASHERS: STAINLESS STEEL, PASSIVATE
 MALE JACKSCREW: STAINLESS STEEL
 POLARIZING POSTS AND NUTS: STAINLESS STEEL
 DUST CAP: CLEAR VINYL


2 CONTACTS SHOWN IN POSITION FOR ILLUSTRATION ONLY, ARE INCLUDED IN A CONTAINER WITHIN CONNECTOR PACKAGE FOR SHIPMENT.

3. CONNECTOR MEETS AMP PRODUCT SPEC 108-10,019.

4. ALL METRIC DIMENSIONS ARE SHOWN IN PARENTHESIS.

5. CONTACTS NOT INCLUDED AND MUST BE ORDERED SEPARATELY (-1 ASSY)

6 SAME AS -1 EXCEPT: CONTACTS, TOOLS AND SEALING PLUGS INCLUDED.

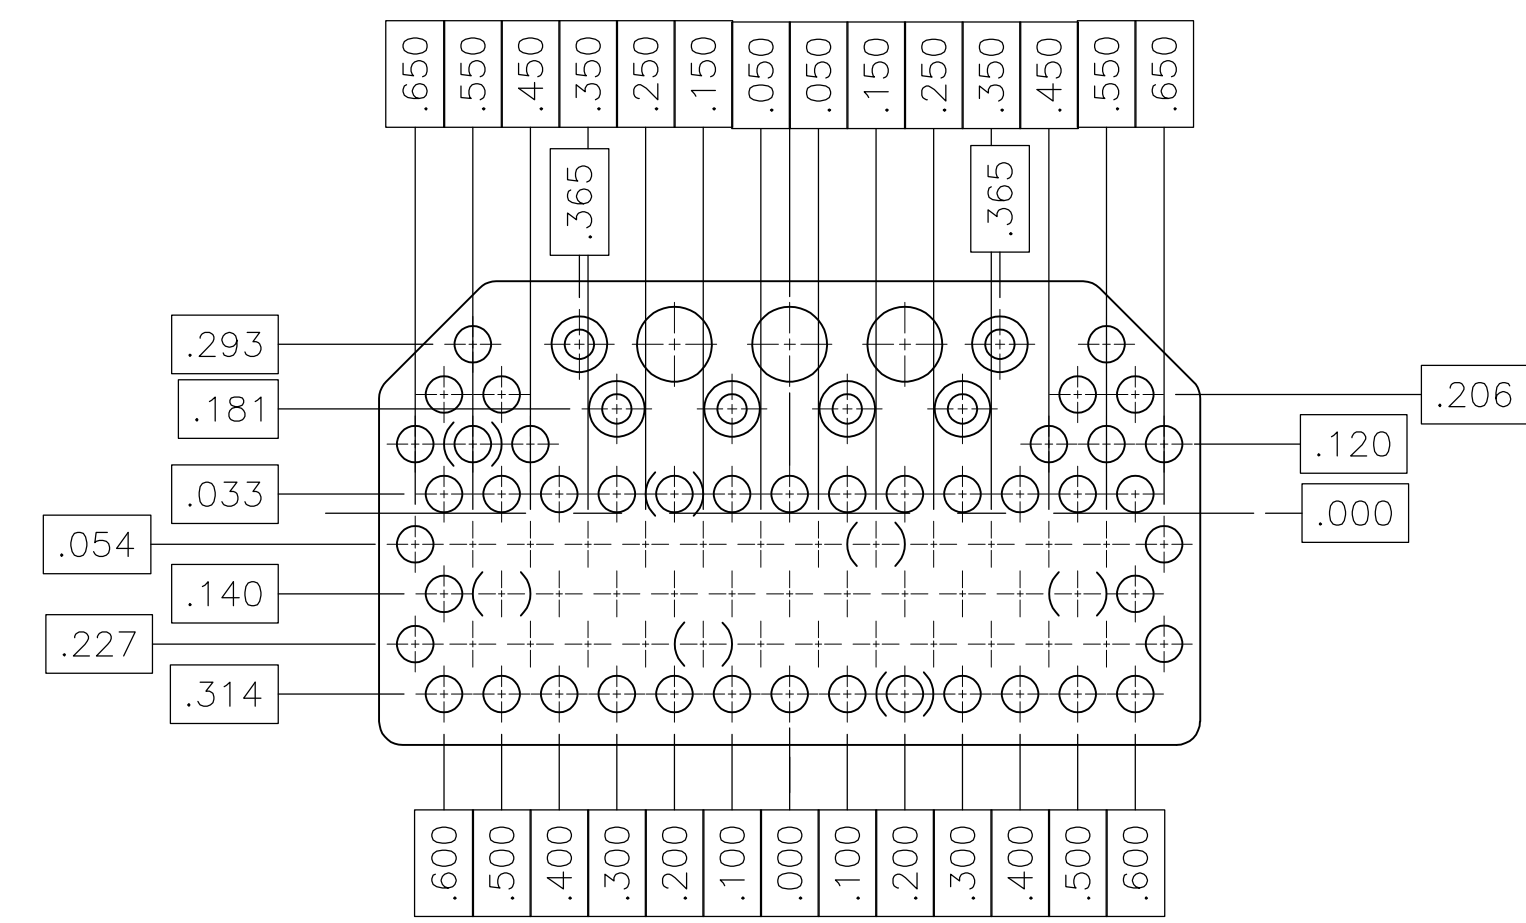

○ INDICATES SIZE 22 CAVITIES (79 PLACES)
 ⊙ INDICATES SIZE 20 CAVITIES (6 PLACES)
 ○ INDICATES SIZE 16 CAVITIES (3 PLACES)

PART NO.	ARRANGEMENTS	
	MODULE A	MODULE B
211027-2	88S	88S
211027-1	88S	88S

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN TERESA HECK 4-2-82	APVD L. LAWYER 4-27-82	NAME
0. PLC ± -	1. PLC ± -	2. PLC ± -	3. PLC ± -	4. PLC ± -
ANGLES ± -				
MATERIAL	FINISH	WEIGHT	SIZE A1	CAGE CODE 00779
			DRAWING NO. 211027	RESTRICTED TO
CUSTOMER DRAWING		SCALE 1:1	SHEET 1 OF 1	REV F

STE TE Connectivity

PLUG CONNECTOR INSTALLATION (WITH CENTER MALE JACKSCREW)