


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 COPYRIGHT 20 BY - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS			
F	LTR	DESCRIPTION	DATE	DWN	APVD
A		INITIAL RELEASE	26NOV2012	wi	wi

HAND TOOL SOLARLOK PV4 PIN AND SOCKET CONTACTS

CSV10 Vario Griff lang TE PN 2-1579005-2
 CSV10 Vario long handles TE PN 2-1579005-2

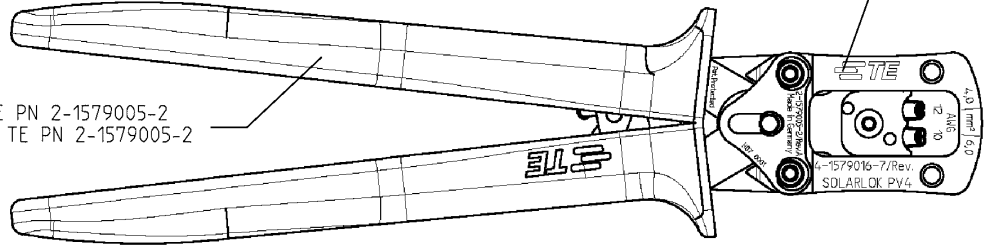

Crimpkopf TE PN 4-1579016-7
 mit Kontaktpositionierer
 Crimp Head TE PN 4-1579016-7
 with contact locator

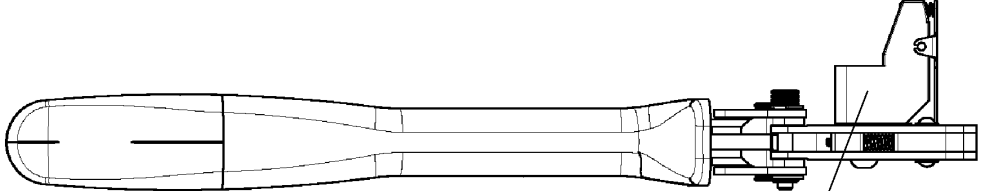


Kontaktpositionierer TE PN 7-1579025-3
 als Ersatzteil erhaeltlich
 Contact locator TE PN 7-1579025-3
 as spare part available

Dimensions:
 250x65x60 mm (LxWxH)

Kontakt	Querschnitt	Drahtcrimp/Wire Crimp		Abisolier-Laenge	Betriebsanleitung
Contact	Wire Size mm ² /AWG	Hoehe/Height mm	Breite/Width mm	Stripp Length mm	Instruction Sheet
1971857/1971858	4.0 / AWG12	2.14 ±0.05	3.94	6.5 +1 -0.05	411-18554
1971857/1971858	6.0 / AWG12	2.49 ±0.05	3.94	6.5 +1 -0.05	411-18554

Verarbeitung der Kontakte nach Verarbeitungsspezifikation 114-106078
 Processing of terminals according to application specification 114-106078

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.Witt	26NOV2012		TE Connectivity	
		CHK C.Witt	26NOV2012		NAME HAND TOOL SOLARLOK PV4 HANDZANGE SOLARLOK PV4	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD		
0 PLC		+/-		PRODUCT SPEC		
1 PLC		+/-		APPLICATION SPEC		
2 PLC		+/-		SIZE		
3 PLC		+/-		CAGE CODE		
4 PLC		+/-		DRAWING NO		
ANGLES		±3°		RESTRICTED TO		
MATERIAL		FINISH		WEIGHT		
				470 g		
CUSTOMER DRAWING				SCALE 1:1		SHEET 1 of 1
				A3 00779		REV A