


UMK- EC56/56-XUL

Order No.: 2975641

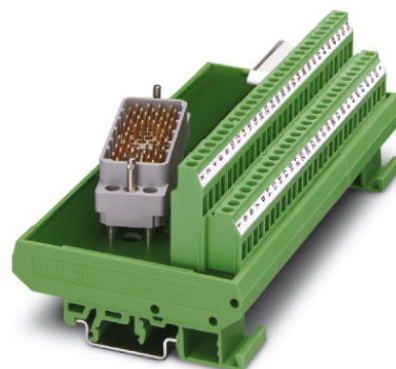


<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2975641>

VARIOFACE module, for ELCO plug connector, for mounting on NS 35/7.5 or NS 32, with pin strip 8016 left, no. of positions 56



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Commercial data

| | |
|--------------------------|--|
| GTIN (EAN) |  4 017918 089054 |
| Note | Made-to-order |
| sales group | I031 |
| Pack | 1 pcs. |
| Customs tariff | 85369010 |
| Catalog page information | Page 234 (IF-2002) |

Technical data

General data

| | |
|---|------------------|
| Nominal voltage U_N | 50 V AC/DC |
| Max. current carrying capacity per branch | 2 A |
| Number of positions | 56 |
| Width | 157.5 mm |
| Height | 77 mm |
| Depth | 58.5 mm |
| Ambient temperature (operation) | -20 °C ... 40 °C |

| | |
|---|------------------|
| Ambient temperature (storage/transport) | -20 °C ... 70 °C |
| Test voltage contact/contact | 0.8 kV |
| Mounting position | Any |
| Standards/regulations | DIN VDE 0110 |
| Pollution degree | 2 |
| Surge voltage category | II |

Connection data

| | |
|--|---------------------|
| Connection 1 | PCB connection |
| Connection in acc. with standard | IEC / EN |
| Type of connection | Screw connection |
| Conductor cross section solid min. | 0.2 mm ² |
| Conductor cross section solid max. | 4 mm ² |
| Conductor cross section stranded min. | 0.2 mm ² |
| Conductor cross section stranded max. | 2.5 mm ² |
| Conductor cross section AWG/kcmil min. | 24 |
| Conductor cross section AWG/kcmil max | 12 |
| Stripping length | 8 mm |
| Screw thread | M3 |
| Connection 2 | ELCO connection |
| Type of connection | Pluggable |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

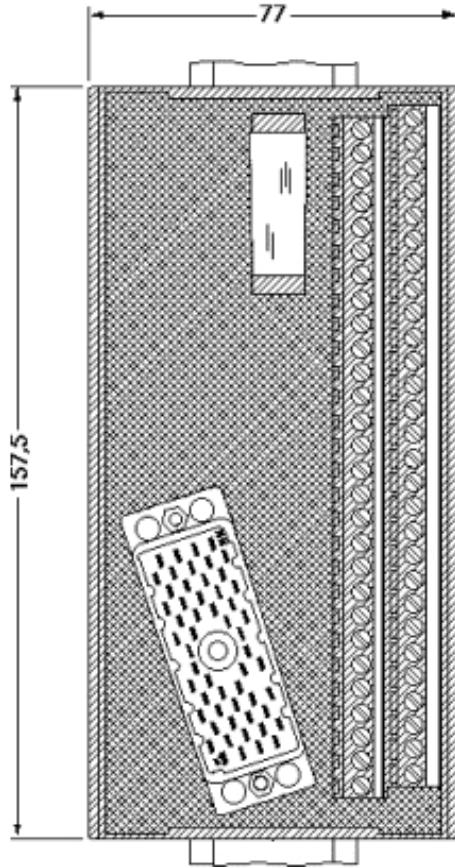

UMK- EC56/56-XUL Order No.: 2975641

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2975641>

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2011 Phoenix Contact
Technical modifications reserved;