

Bus coupler - IBS ST 24 BK-RB-T DIO 8/8/3-LK - 2723453

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



INTERBUS-ST I/O bus terminal, FO connection, 8 digital inputs, 8 digital outputs, 500 mA, with additional D-SUB 9 remote bus branch, IP20 degree of protection, consisting of: Terminal part with screw connection and module electronics

Product description

INTERBUS ST bus terminal modules with additional interfaces (I/O)

In addition to the actual bus terminal module functions, 8 digital inputs and 8 digital outputs are integrated into the INTERBUS input/output bus terminal modules. On top of this, the modules can be extended by up to four INTERBUS-ST input/output modules. All the bus terminal module functions, such as switching of the input/output modules from the INTERBUS network remain available without restrictions.

This bus terminal module is particularly suitable for use in applications for which very little space is available, or where only a few input/output points are required.

The IBS ST 24 BK DIO 8/8/3-T or -LK modules provide the option of assigning inputs and outputs either by screw terminal blocks in the termination block, or using an FLK system connector. This permits the ELR 319 electronic load relay or VARIOFACE input/output modules to be connected simply using 14-pos. FLK connectors.

The IBS ST 24 BK RB-T or IBS ST 24 BK RB-LK modules have an additional remote bus branch. This remote bus branch has the same restrictions regarding structure as any remote bus. All devices with remote bus interface can be linked in here.

All INTERBUS bus terminal modules make it possible to individually enable/disable the additional bus interfaces. To some extent, they perform the role of two bus terminal modules in the INTERBUS system and are also treated as such in the address lists and configuring software (CMD).

Note: When configuring buses branching off from the bus terminal modules, please observe the topology supported by INTERBUS controller boards.

Product Features

- Additional I/Os onboard
- Additional remote/local bus branches
- Copper or fiber optic connection



Key commercial data

Packing unit	1 pc
GTIN	 4 017918 154554
Weight per Piece (excluding packing)	756.1 GRM
Custom tariff number	85389091
Country of origin	Germany

Bus coupler - IBS ST 24 BK-RB-T DIO 8/8/3-LK - 2723453

Technical data

Dimensions

Width	118 mm
Height	117 mm
Depth	116 mm

Ambient conditions

Ambient temperature (operation)	0 °C ... 55 °C
Ambient temperature (storage/transport)	-25 °C ... 70 °C
Permissible humidity (operation)	75 % (on average, 85% infrequently, non-condensing)
Permissible humidity (storage/transport)	75 % (on average, 85% infrequently, non-condensing)
Air pressure (operation)	80 kPa ... 106 kPa (up to 2000 m above mean sea level)
Air pressure (storage/transport)	80 kPa ... 106 kPa (up to 2000 m above mean sea level)
Degree of protection	IP20

Interfaces

Fieldbus system	INTERBUS
Designation	INTERBUS remote bus
Connection method	FSMA plugs
Designation connection point	Incoming/Outgoing Remote Bus
Fieldbus system	Lokalbus
Designation	ST local bus
Connection method	ST local bus connector
Fieldbus system	INTERBUS
Designation	INTERBUS
Connection method	9-pos. D-SUB male connector
Number of positions	9

Digital inputs

Input name	Digital inputs
Connection method	Screw connection
	3-conductor
Number of inputs	8
Typical response time	3 ms (typical)
Protective circuit	Overload protection Fuse in header
Input voltage	24 V DC
Input voltage range "0" signal	-30 V DC ... 5 V DC
Input voltage range "1" signal	13 V DC ... 30 V DC
Nominal input current at U _{IN}	typ. 5 mA (per channel)

Digital outputs

Bus coupler - IBS ST 24 BK-RB-T DIO 8/8/3-LK - 2723453

Technical data

Digital outputs

Output name	Digital outputs
Connection method	Screw connection
	3-conductor
Number of outputs	8
Protective circuit	Short-circuit protection Electronic
Maximum output current per channel	500 mA
Maximum output current per module / terminal block	4 A
Maximum output current per group	2 A
Nominal load, lamp	12 W
Nominal load, ohmic	12 W

Power supply for module electronics

Supply voltage	24 V DC
Supply voltage range	18.5 V DC ... 30.5 V DC (including ripple)
Ripple	3.6 V _{pp} within the allowable voltage range
Current consumption	typ. 150 mA

General

Weight	710 g
Mounting type	DIN rail
Protection class	III, IEC 61140, EN 61140, VDE 0140-1
Test section	Incoming remote bus / Outgoing remote bus 500 V AC 50 Hz 1 min
	Incoming remote bus/local bus 500 V AC 50 Hz 1 min
	Incoming remote bus/Remote bus branch 500 V AC 50 Hz 1 min
	Supply voltage logic / I/O 500 V AC 50 Hz 1 min

Classifications

eCl@ss

eCl@ss 4.0	27250203
eCl@ss 4.1	27250203
eCl@ss 5.0	27250203
eCl@ss 5.1	27242608
eCl@ss 6.0	27242608
eCl@ss 7.0	27242608

ETIM

ETIM 2.0	EC001434
----------	----------

Bus coupler - IBS ST 24 BK-RB-T DIO 8/8/3-LK - 2723453

Classifications

ETIM

ETIM 3.0	EC001604
ETIM 4.0	EC001604
ETIM 5.0	EC001604

UNSPSC

UNSPSC 6.01	43172015
UNSPSC 7.0901	43201404
UNSPSC 11	43172015
UNSPSC 12.01	43201404
UNSPSC 13.2	43201404

Approvals

Approvals

Approvals

GOST / INTERBUS CLUB

Ex Approvals

Approvals submitted

Approval details


GOST 
--

INTERBUS CLUB

Drawings

Bus coupler - IBS ST 24 BK-RB-T DIO 8/8/3-LK - 2723453

Connection diagram

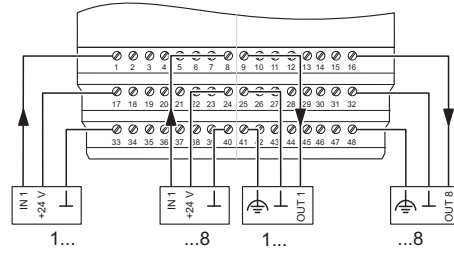

Dimensioned drawing

