



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	ECR-05-005975	30-JUN-05	BM	JB
	C	ECR-10-019054	15SEP10	DP	MQW

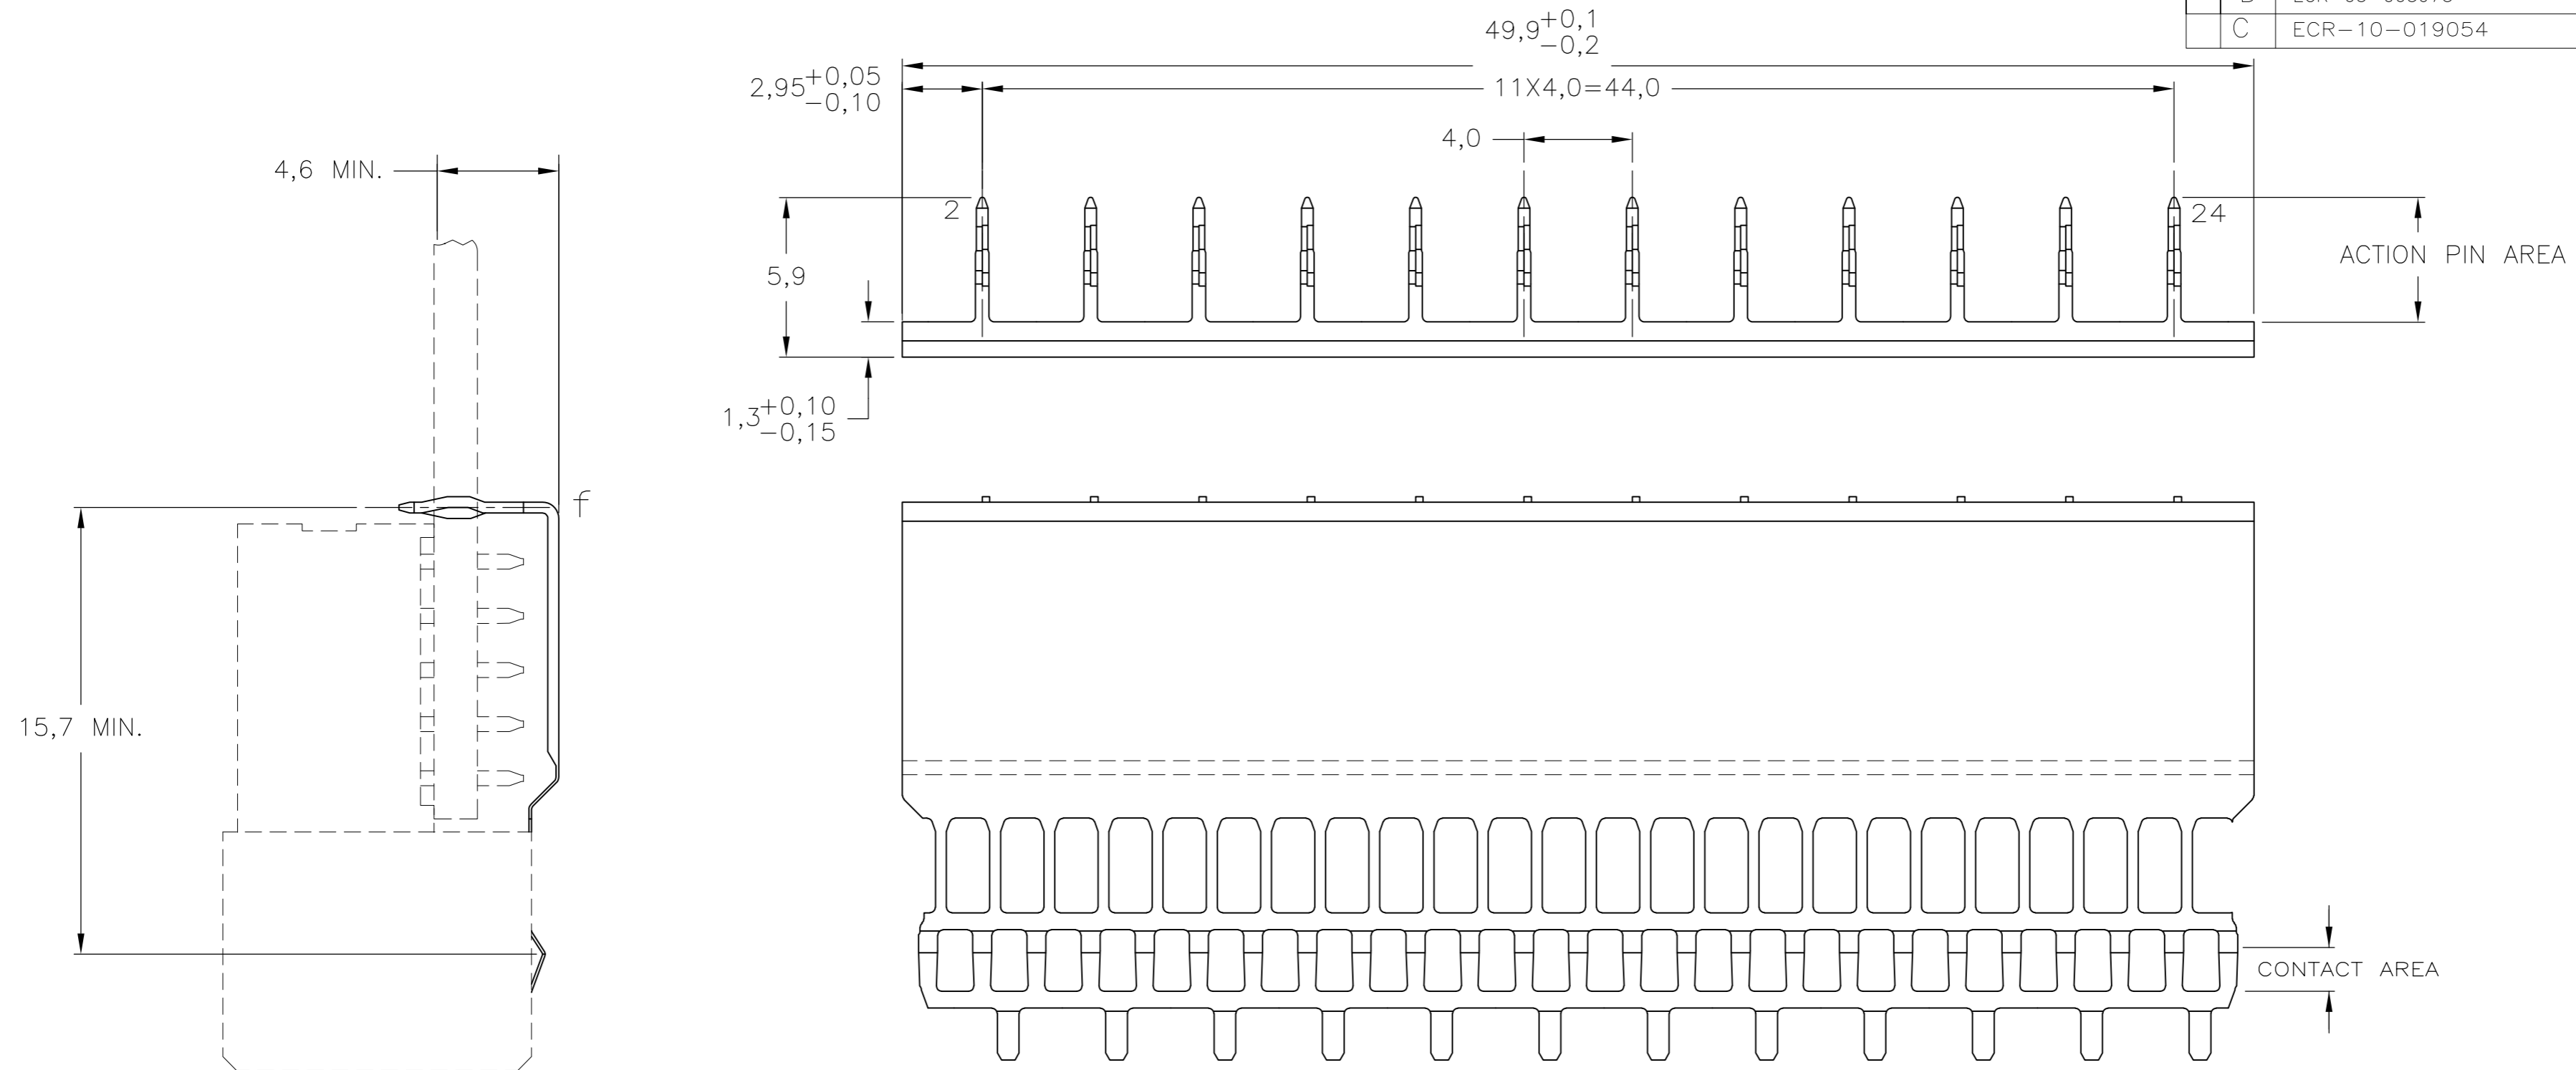

- NOTES:**
- ⚠️ PLATING:  
 CONTACT AREA: 0,76µm Au MIN. OVER 1,27µm Ni MIN.  
 ACTION PIN : 0,5µm Sn MIN.  
 REMAINDER : Ni
  - ⚠️ MATERIAL; PHOSPHORBRONZE.
  - ⚠️ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
  - ⚠️ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-25 COLUMNS WITH UPPERSHIELD, 125+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
  - 5 MAX. BOARD THICKNESS 3,5 mm.
  - ⚠️ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT.
- TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.

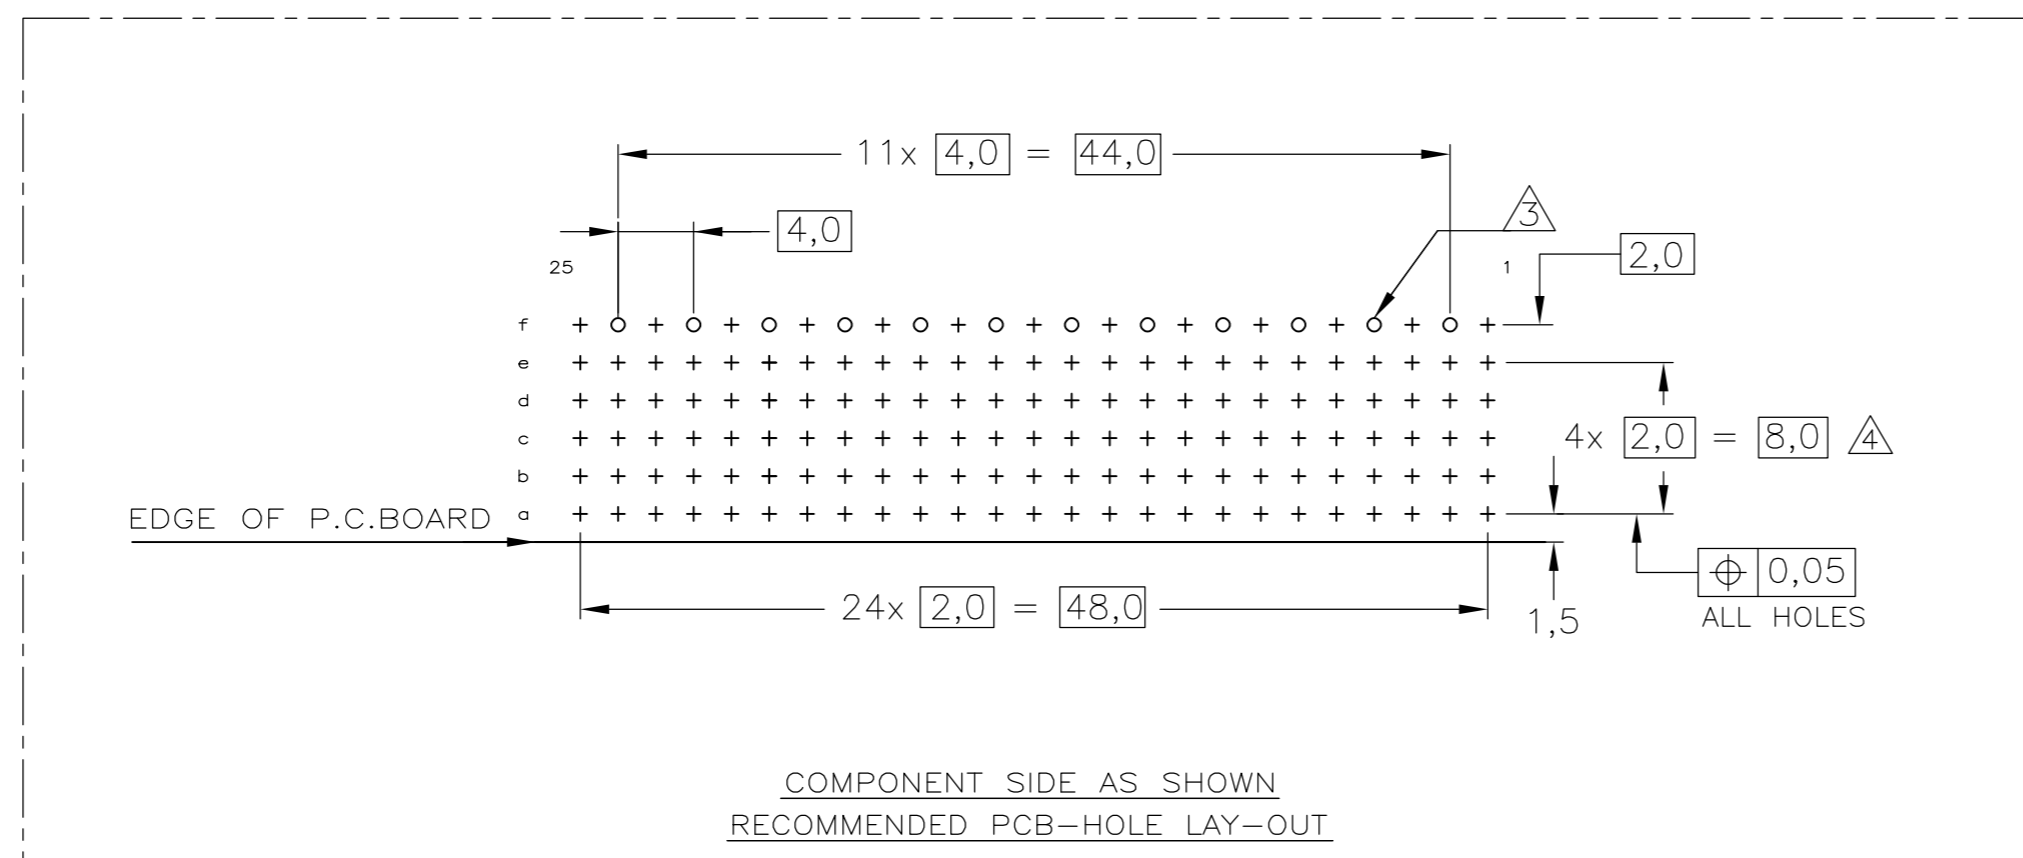

FINISH		MATERIAL		PARTNUMBER	
⚠️ ⚠️		⚠️		5338110-9	
⚠️		⚠️		5338110-2	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 13AUG04	Tyco Electronics Corporation 's-Hertogenbosch,5222AR-32		
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.2	CHK B.MOOIJ 25MAR05	NAME Z-PACK 2mm HM GROUND RETURN LOWER SHIELD TYPE B-25 COLUMNS		
		APVD B.MOOIJ 25MAR05	PRODUCT SPEC 108-19082	SIZE A2	CAGE CODE 00779
			APPLICATION SPEC 114-19029	DRAWING NO C=5338110	RESTRICTED TO -
MATERIAL -	FINISH -	WEIGHT -	CUSTOMER DRAWING	SCALE 5:1	SHEET 1 OF 1
			REV C		