

Patch cable - VS-FSDB-IP20SDA/981/5,0 SCO - 1420184

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Assembled USB cable, shielded, color: black, PVC outer sheath, USB mini-B/IP20 on USB type A/IP20, length: 5 m



Key Commercial Data

Packing unit	1 pc
Weight per Piece (excluding packing)	250.0 g
Custom tariff number	85444290
Country of origin	Germany

Technical data

Mechanical characteristics

Number of positions	4
Shielded	Yes
Insertion/withdrawal cycles	≥ 100
Cable structure	2x2xAWG26/7 + 2xAWG20/19; S/FTP
Length of cable	5 m

Ambient conditions

Ambient temperature (operation)	-25 °C ... 80 °C (cable, flexible installation)
Degree of protection	IP20

Material data

Flammability rating according to UL 94	V0
Contact material	Cu alloy
Contact surface material	Ni/Au
Outer sheath, material	PVC
External sheath, color	black

Patch cable - VS-FSDB-IP20SDA/981/5,0 SCO - 1420184

Technical data

Electrical characteristics

Transmission characteristics (category)	USB 2.0
---	---------

Standards and Regulations

Flammability rating according to UL 94	V0
--	----

Classifications

eCl@ss

eCl@ss 4.0	272607xx
eCl@ss 4.1	27260701
eCl@ss 5.0	27260701
eCl@ss 5.1	27259205
eCl@ss 6.0	27269202
eCl@ss 7.0	27449203
eCl@ss 8.0	27060308

ETIM

ETIM 4.0	EC001408
ETIM 5.0	EC001408


UNSPSC

UNSPSC 6.01	31251501
UNSPSC 7.0901	31251501
UNSPSC 11	31251501
UNSPSC 12.01	31251501
UNSPSC 13.2	31251501

Drawings


Patch cable - VS-FSDB-IP20SDA/981/5,0 SCO - 1420184

Schematic diagram



Pin assignment plug USB, type A

Dimensional drawing

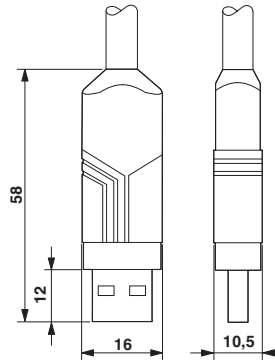

USB connector, type A, Standard