

SIGN	DATE	DESCRIPTION	APPROVER

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!


Material

- Insulator: Glass Filled Polyester
- Flammability: UL94V-0
- Color: Black

Ratings

- Operating Temperature: -40° - +105°
- RoHS Compliant

Circuits	Dimension
	A
06	12.2(.480)
08	14.7(.579)
10	17.3(.681)
12	19.8(.780)
14	22.3(.878)
16	24.9(.980)
20	30.0(1.181)
24	35.0(1.378)
26	37.6(1.480)
30	42.7(1.681)
34	47.7(1.878)
36	50.2(1.976)
40	55.4(2.181)
44	60.4(2.378)
50	68.1(2.681)
56	75.7(2.980)
60	80.8(3.181)
62	83.3(3.280)
64	85.8(3.378)

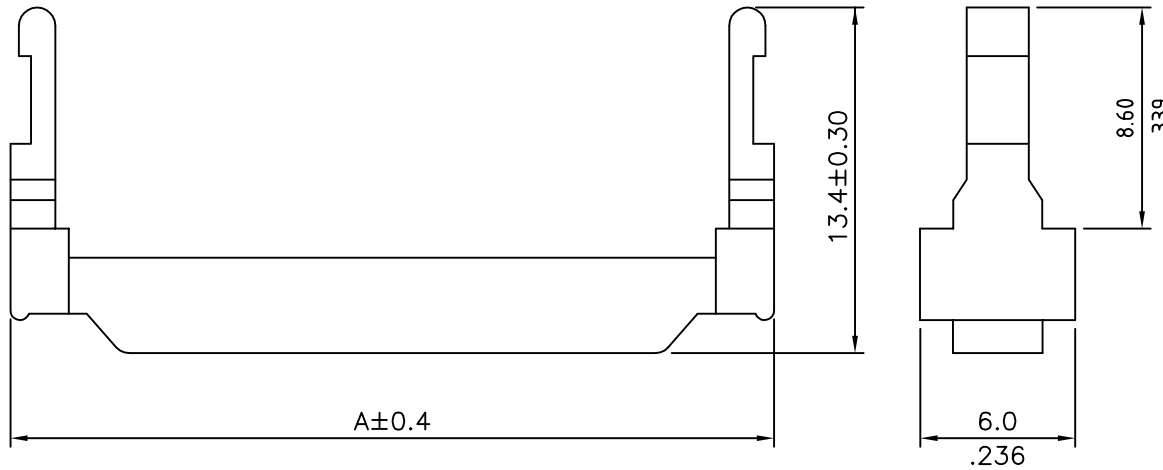

PART NUMBER:

101-XX-S

Number of circuits

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ON-SHORE TECHNOLOGY, INC. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ON-SHORE TECHNOLOGY, INC.



TITLE		101 Series Strain Relief - 2.54mm Dual Row IDC strain relief			
PART NO.	101-XX-S	DWG NO.	101-XX-S.DWG		
APPROVED	CHECKED	DESIGNED	DRAWN	4050	
Steven 2007.08.27	Marvin 2007.08.27	Marvin 2007.08.27	Marvin 2007.08.27	Tolerance	
				UNIT: mm/inches	.X ±0.30/.012
				SCALE: NONE	.XXX ±0.20/.008
SHEET: 01/01				REV: A	X* ±1°