


PTFC270051M


High Power RF LDMOS Field Effect Transistor 5 W, 28 V, 900 – 2700 MHz

Description

The PTFC270051M is an unmatched 5-watt LDMOS FET suitable for power amplifier applications with frequencies from 900 MHz to 2700 MHz. This LDMOS transistor offers excellent gain, efficiency and linearity performance in a small overmolded plastic package.

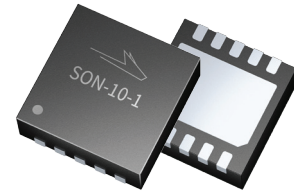

PTFC270051M
Package PG-SON-10

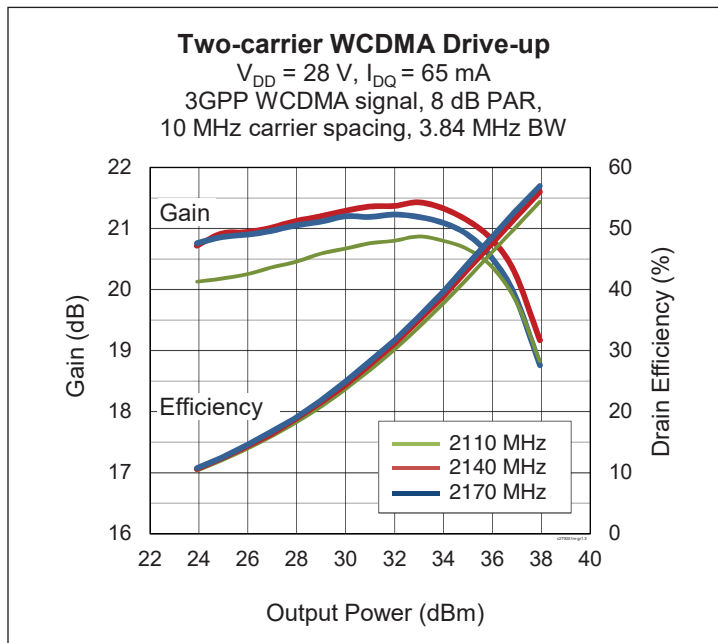

Features

- Unmatched
- Typical CW performance, 940 MHz, 28 V
 - Output power (P_{1dB}) = 6.5 W
 - Gain = 23 dB
 - Efficiency = 62%
- Typical CW performance, 2170 MHz, 28 V
 - Output power (P_{1dB}) = 7.3 W
 - Gain = 20.3 dB
 - Efficiency = 60%
- Typical CW performance, 2655 MHz, 28 V
 - Output power (P_{1dB}) = 7.3 W
 - Gain = 19.9 dB
 - Efficiency = 59.5%
- Capable of handling 10:1 VSWR @ 28 V, 5 W (CW) output power
- Integrated ESD protection: Human Body Model Class 1A (per JESD22-A114)
- Pb-free and RoHS compliant

RF Characteristics, 2170 MHz

CW Specifications (tested in Wolfspeed test fixture)

$V_{DD} = 28\text{ V}$, $I_{DQ} = 65\text{ mA}$, $P_{OUT} = 5\text{ W}$, $f_1 = 2110\text{ MHz}$, $f_2 = 2170\text{ MHz}$

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	18.5	19.5	—	dB

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 60\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1	μA
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1	μA
On-State Resistance	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	2	—	Ω
Operating Gate Voltage	$V_{DS} = 28\text{ V}$, $I_{DQ} = 65\text{ mA}$	V_{GS}	2.2	2.7	3.2	V

Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	65	V
Gate-Source Voltage	V_{GS}	-6 to +10	V
Operating Voltage	V_{DD}	0 to +32	V
Junction Temperature	T_J	225	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} 70^{\circ}\text{C}$, 5.5 W CW)	$R_{\theta JC}$	3.84	$^{\circ}\text{C/W}$

Moisture Sensitivity Level

Level	Test Standard	Package Temperature	Unit
3	IPC/JEDEC J-STD-020	260	$^{\circ}\text{C}$

Ordering Information

Type	Order Code	Package and Description	Shipping
PTFC270051M V2 R1K	PTFC270051M-V2-R1K	PG-SON-10, molded plastic, SMD	Tape & Reel, 1000 pcs

Evaluation Boards

Order Code	Frequency	Description
LTN/PTFC270051M V2	2110 – 2170 MHz	Class AB with combined outputs, R04360, 0.508 mm thick
LTN/PTFC270051M E3	2620 – 2690 MHz	Class AB with combined outputs, R04360, 0.508 mm thick
LTN/PTFC270051M E4	920 – 960 MHz	Class AB with combined outputs, R04360, 0.508 mm thick
LTN/PTFC270051M E5	1930 – 1990 MHz	Class AB with combined outputs, R04360, 0.508 mm thick
LTN/PTFC270051M E6	1805 – 1880 MHz	Class AB with combined outputs, R04360, 0.508 mm thick

Find Gerber files for these reference fixtures on the Wolfspeed Web site at www.wolfspeed.com/RF

RF Characteristics, 2170 MHz



Two-carrier WCDMA Specifications (not subject to production test—verified by design/characterization in Wolfspeed test fixture)

$V_{DD} = 28\text{ V}$, $I_{DQ} = 65\text{ mA}$, $P_{OUT} = 0.8\text{ W avg}$, $f_1 = 2157.5\text{ MHz}$, $f_2 = 2167.5\text{ MHz}$
 3GPP WCDMA signal, channel bandwidth = 3.84 MHz, peak/average = 8 dB @ 0.01% CCDF





Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	—	21	—	dB
Drain Efficiency	η_D	—	21.5	—	%
Intermodulation Distortion	IMD	—	-35.5	—	dBc

Typical Performance, 2170 MHz


(data taken in a production test fixture)

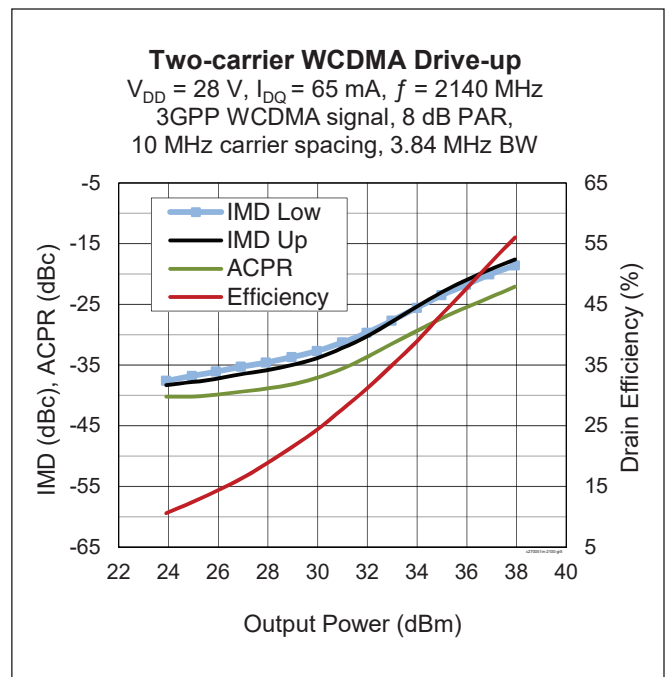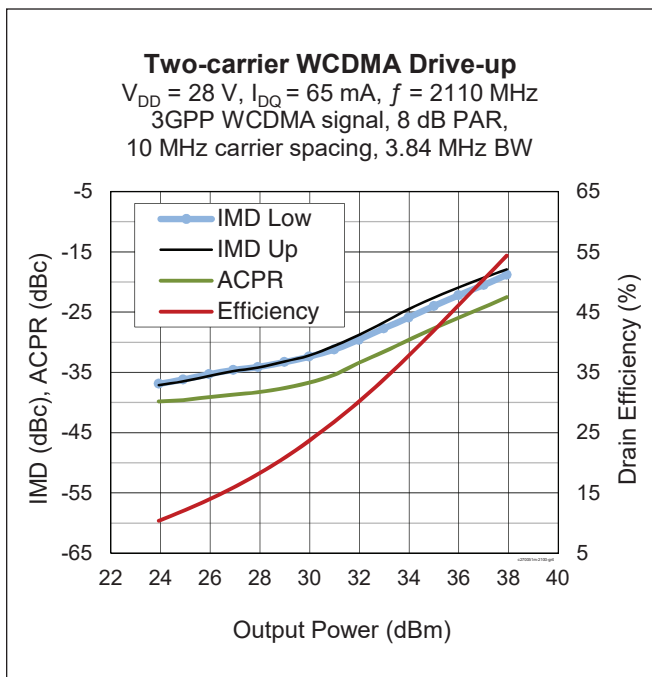

Typical Performance, 2170 MHz (cont.)

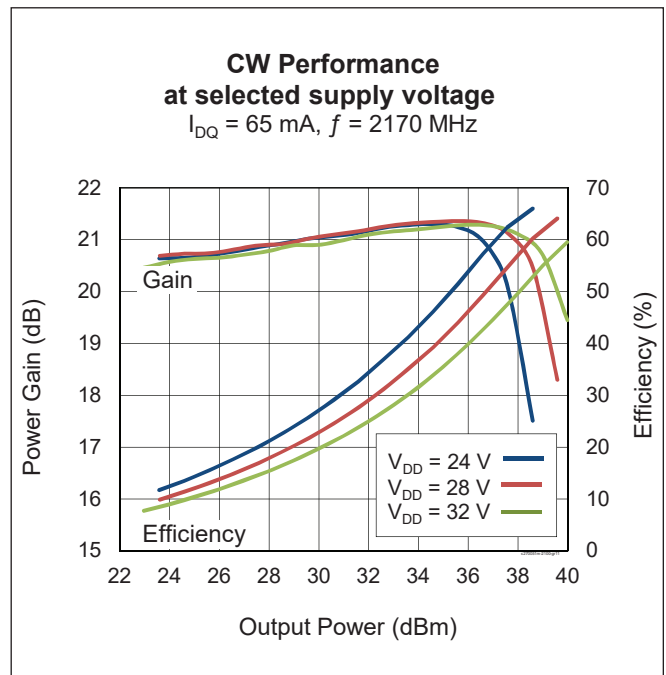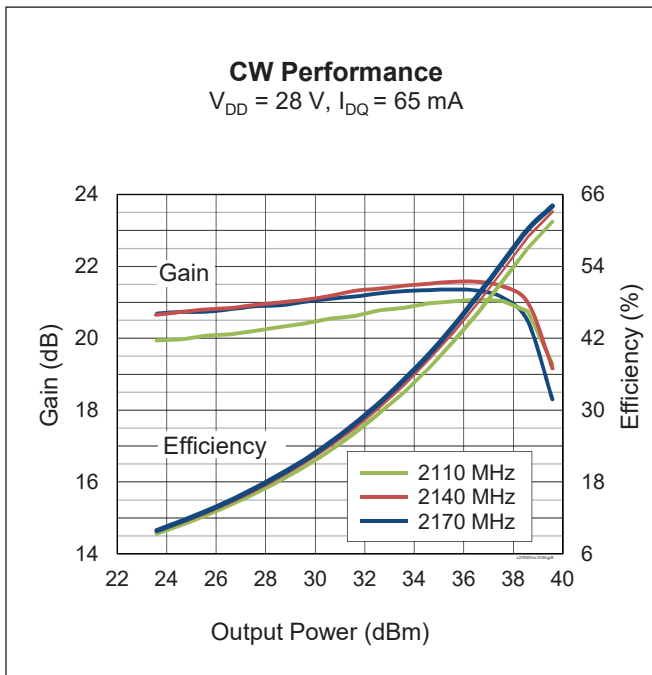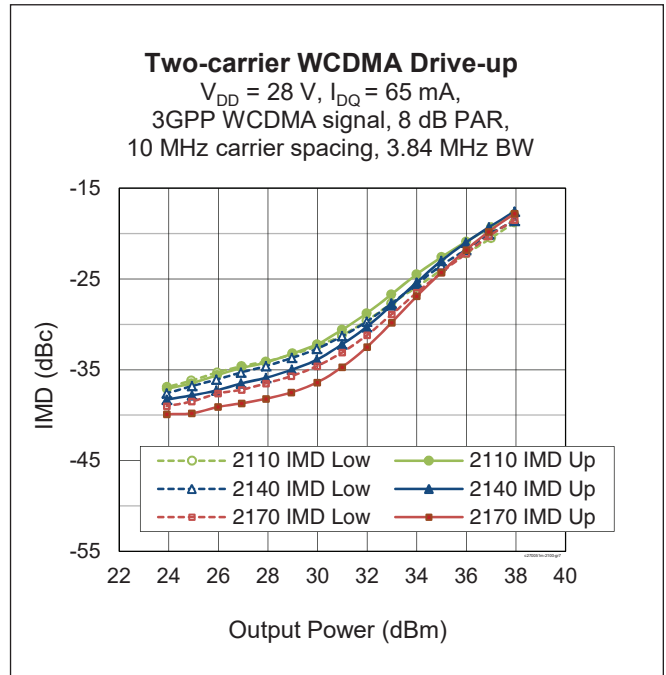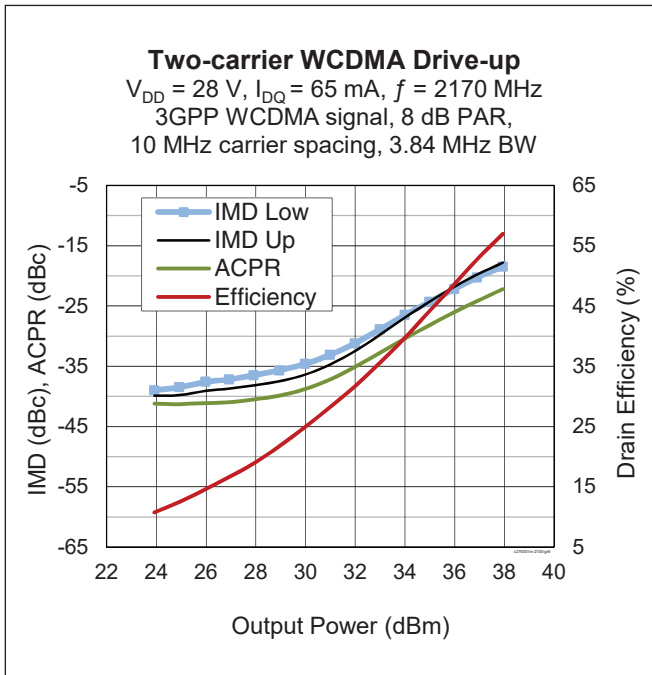


Typical Performance, 2170 MHz (cont.)

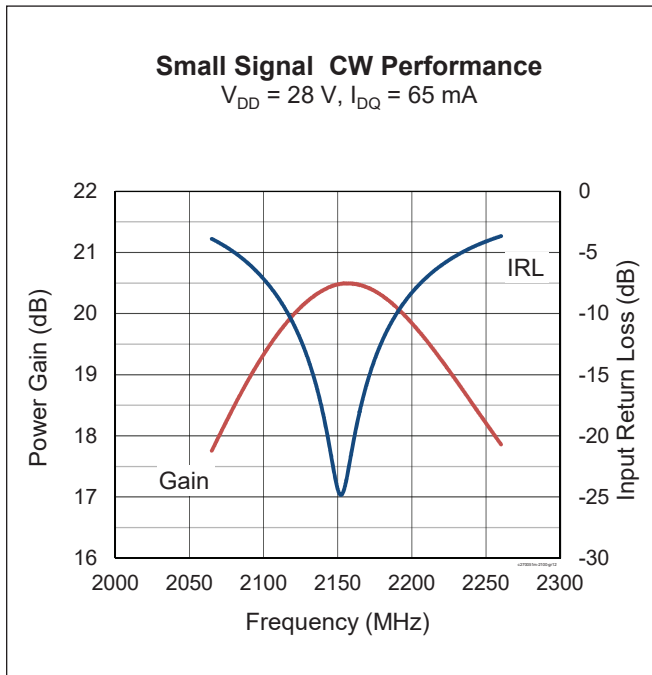

Broadband Circuit Impedance, 2170 MHz

Freq [MHz]	Z Source Ω		Z Load Ω	
	R	jX	R	jX
2110	1.5	-2.6	9.5	5.4
2140	1.5	-2.7	8.7	5.5
2170	1.5	-2.9	7.7	5.6

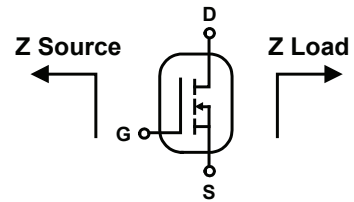


Load Pull Performance

Pulsed CW signal: 160 μsec , 10% duty cycle; 28 V, 65 mA

Class AB		P_{1dB}									
		Max Output Power					Max PAE				
Freq [MHz]	Zs [Ω]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]
2110	$1.5 - j2.6$	$10.6 + j2.6$	20.6	55.0	39.50	8.9	$8.3 + j8.2$	22.5	64.9	38.50	7.1
2140	$1.4 - j2.7$	$9.8 + j2.8$	20.5	56.4	39.46	8.8	$7.6 + j8.8$	22.9	64.1	37.90	6.2
2170	$1.4 - j2.9$	$9.2 + j2.8$	20.7	56.2	39.20	8.3	$6.2 + j8.3$	23.0	63.8	37.40	5.5

Reference Circuit, 2170 MHz

DUT	PTFC270051M
Test Fixture Part No.	LTN/PTFC270051M V2
PCB	Rogers 4350, 0.508 mm [.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$
Find Gerber files for this test fixture on the Wolfspeed Web site at (www.wolfspeed.com/RF)	

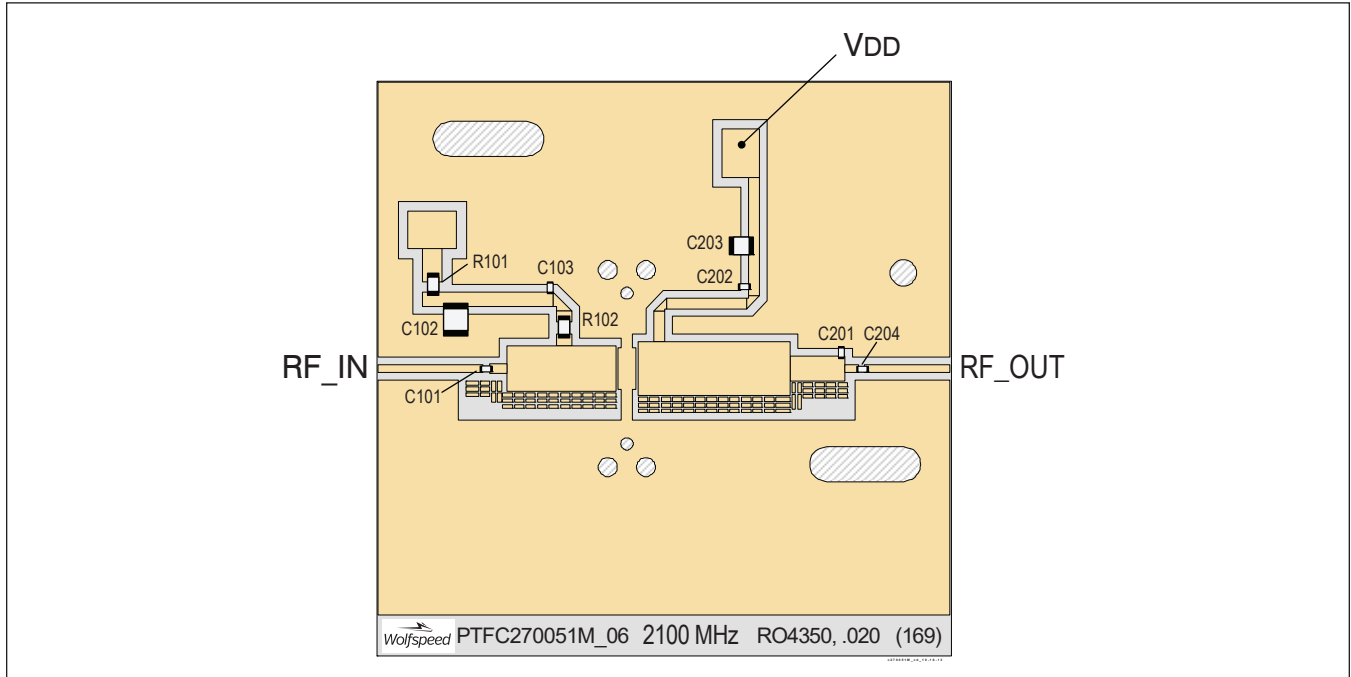

Production test circuit assembly diagram (not to scale)

Components Information

Component	Description	Supplier	P/N
C101	Chip capacitor, 1 pF	ATC	ATC600S1R0BI250X
C102	Chip capacitor, 2.2 μ F	TDK Corporation	C4532X7R1H225M160KA
C103	Chip capacitor, 12 pF	ATC	ATC600S120BT250X
C201	Chip capacitor, 1.1 pF	ATC	ATC600S1R1BT250X
C202	Chip capacitor, 12 pF	ATC	ATC600S120BT250X
C203	Capacitor, 10 μ F	Taiyo Yuden	UMK325C7106MM-T
C204	Chip capacitor, 12 pF	ATC	ATC600S120BT250X
R101, R102	Resistor, 10 Ω	Panasonic	ERJ-8GEYJ100V



RF Characteristics, 940 MHz

Two-carrier WCDMA Specifications (not subject to production test—verified by design/characterization in WolfSpeed test fixture)





$V_{DD} = 28\text{ V}$, $I_{DQ} = 65\text{ mA}$, $P_{OUT} = 0.8\text{ W avg}$, $f_1 = 935\text{ MHz}$, $f_2 = 945\text{ MHz}$
 3GPP WCDMA signal, channel bandwidth = 3.84 MHz, peak/average = 8 dB @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	—	24	—	dB
Drain Efficiency	η_D	—	20.7	—	%
Intermodulation Distortion	IMD	—	-42	—	dBc



Typical Performance, 940 MHz

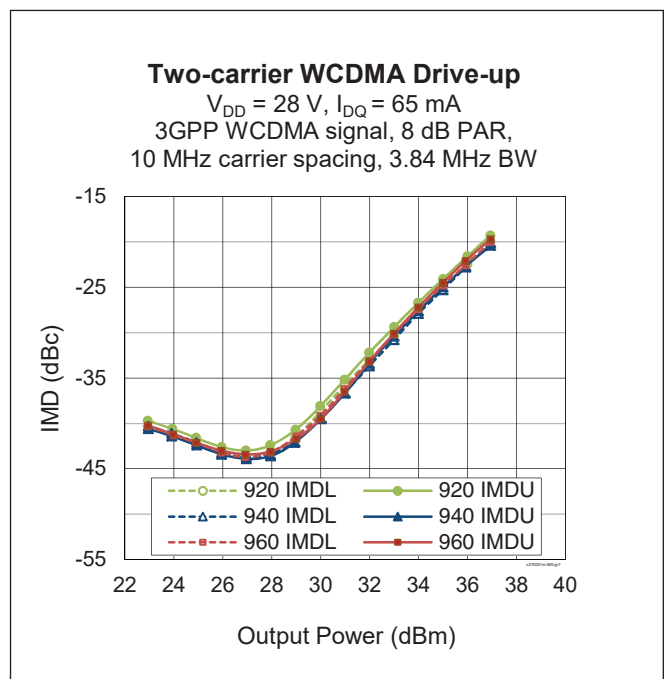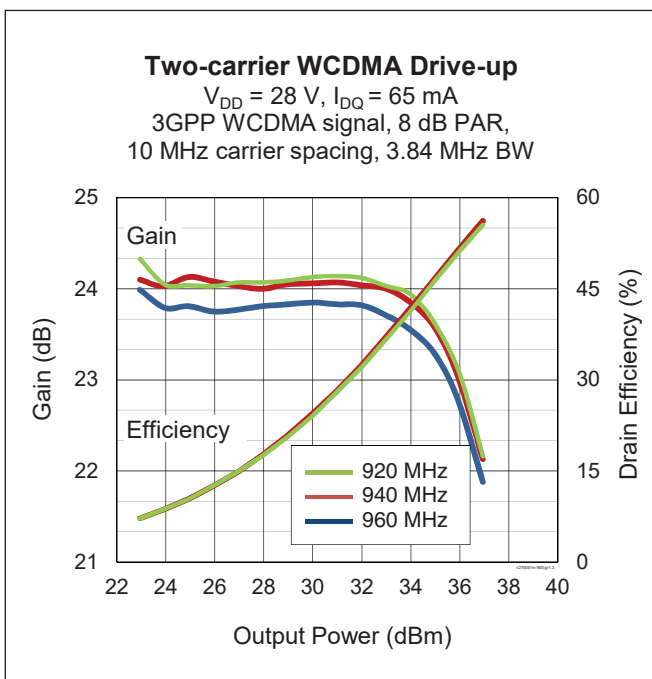

Reference Circuit, 940 MHz (cont.)

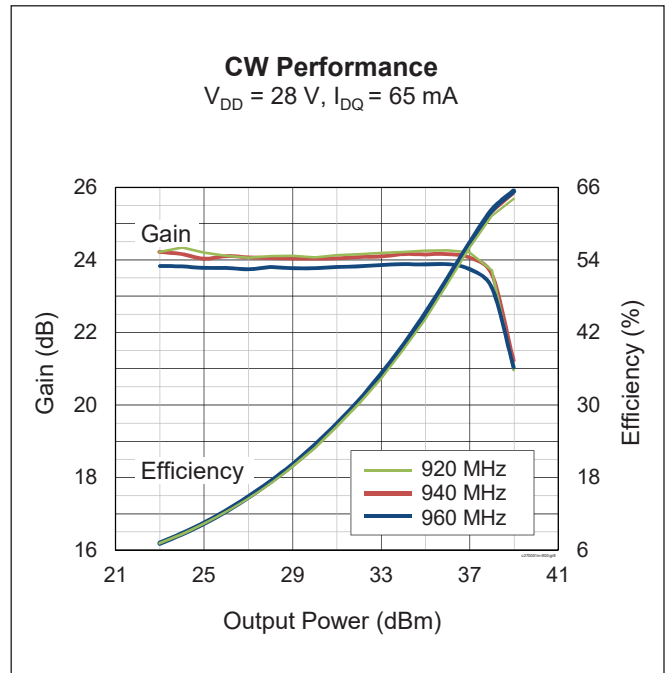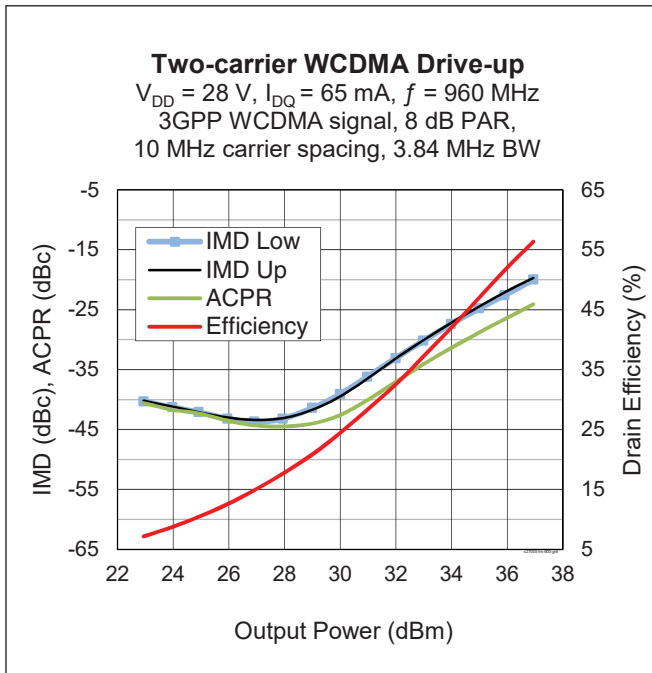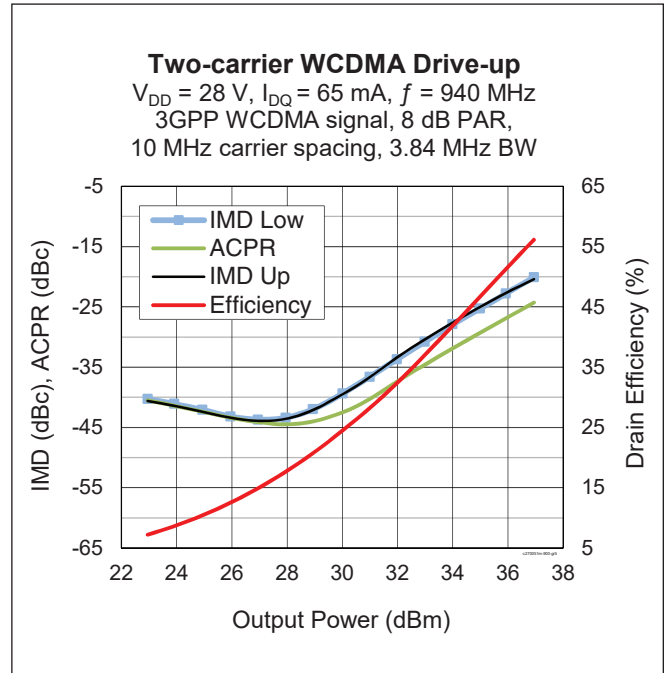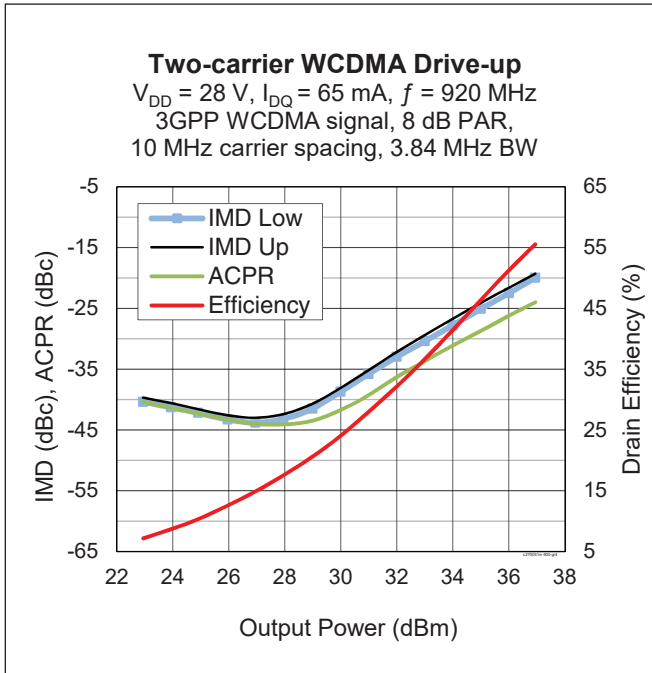


Typical Performance, 940 MHz (cont.)

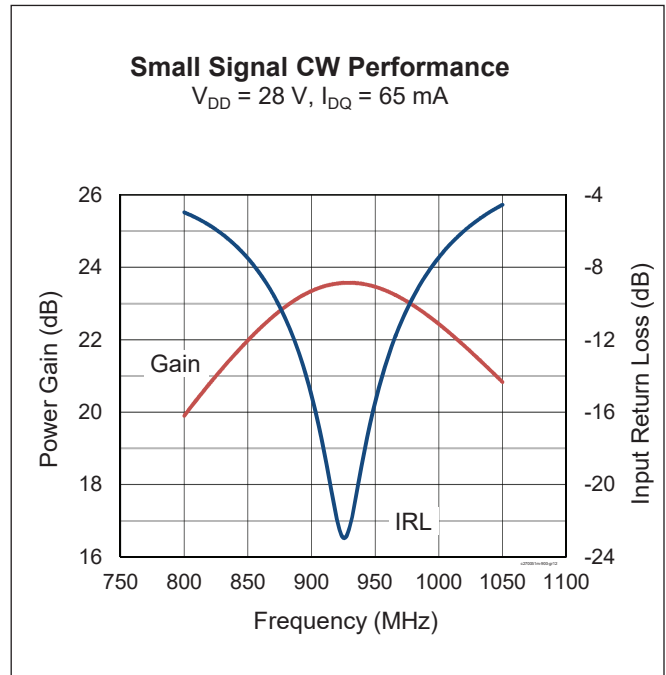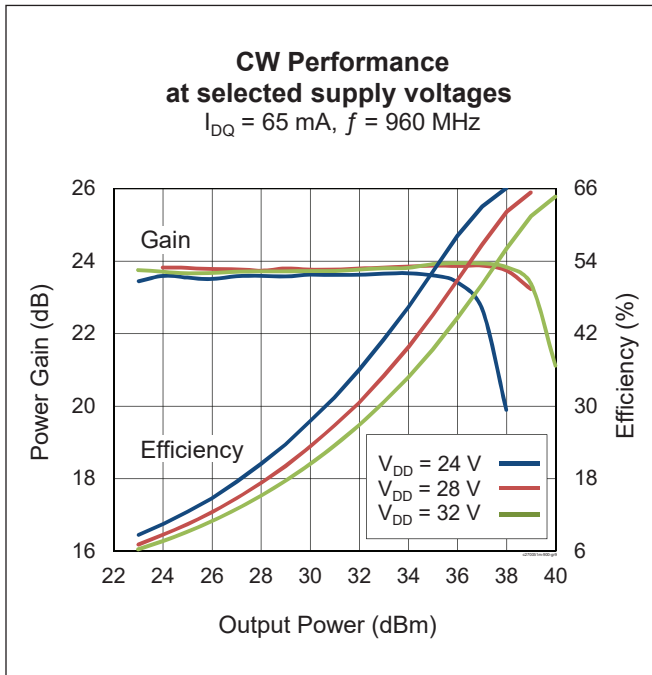

Broadband Circuit Impedance

Freq [MHz]	Z Source Ω		Z Load Ω	
	R	jX	R	jX
920	3.3	10	25.6	13.2
940	3.4	10.2	24.7	13.3
960	3.5	10.3	24.3	14.7

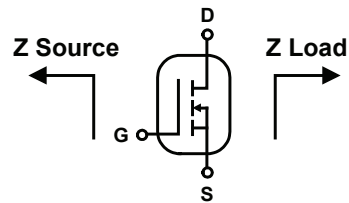

Loadpull Performance

Pulsed CW signal: 160 μsec , 10% duty cycle; 28 V, 65 mA

Class AB		P_{1dB}									
		Max Output Power					Max PAE				
Freq [MHz]	Zs [Ω]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]
920	3.35 + j10	25.7 + j4.7	25.5	62.2	39.40	8.7	25.6 + j21.7	27.6	70.7	38.00	6.3
940	3.4 + j10.2	24.8 + j6.3	25.6	62.1	39.35	8.6	24.6 + j20.4	27.3	69.2	38.10	6.5
960	3.55 + j10.3	24.4 + j6.6	25.3	60.3	39.10	8.1	24.1 + j22.8	27.3	68.2	37.50	5.6





RF Characteristics, 2655 MHz

Two-carrier WCDMA Specifications (not subject to production test—verified by design/characterization in Wolfspeed test fixture)





$V_{DD} = 28\text{ V}$, $I_{DQ} = 65\text{ mA}$, $P_{OUT} = 0.8\text{ W avg}$, $f_1 = 2650\text{ MHz}$, $f_2 = 2660\text{ MHz}$
 3GPP WCDMA signal, channel bandwidth = 3.84 MHz, peak/average = 8 dB @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Gain	G_{ps}	—	20.9	—	dB
Drain Efficiency	η_D	—	19	—	%
Intermodulation Distortion	IMD	—	-40	—	dBc



Typical Performance, 2655 MHz

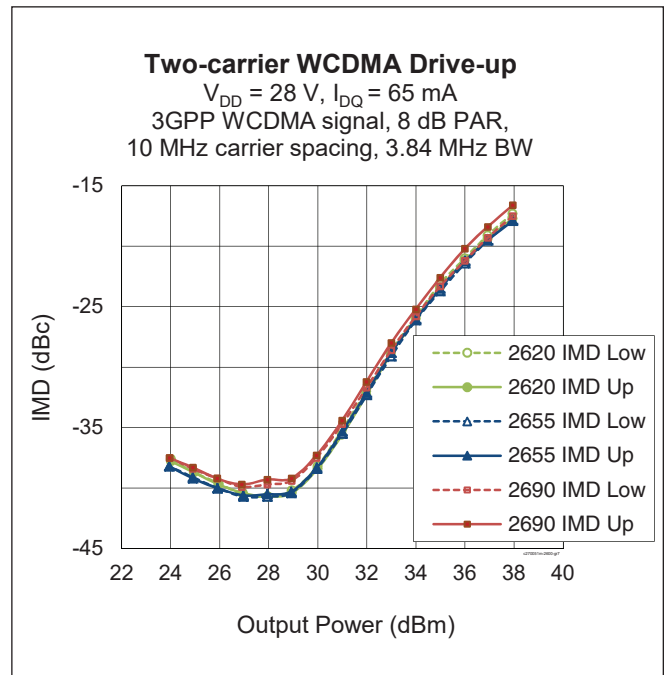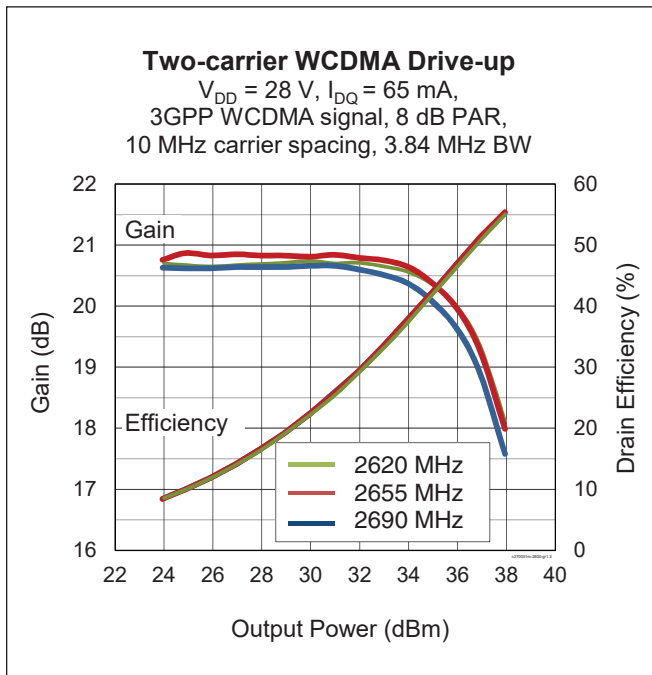

Typical Performance, 2655 MHz (cont.)

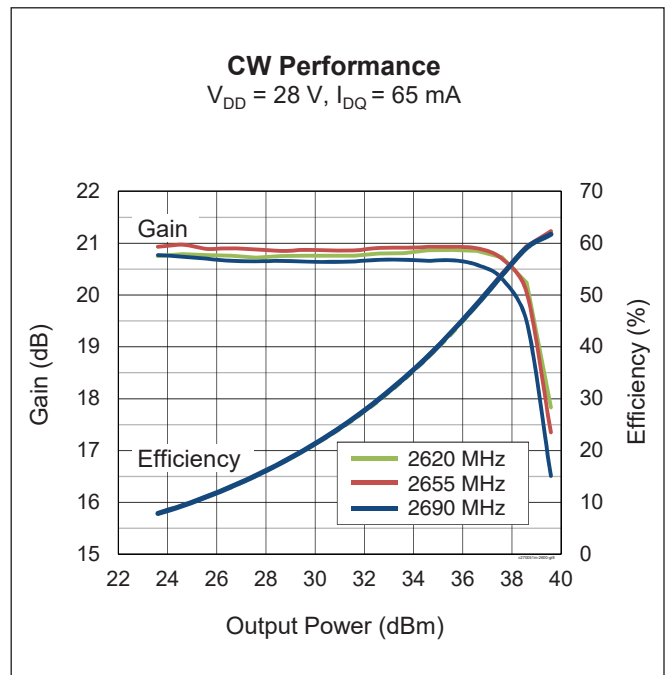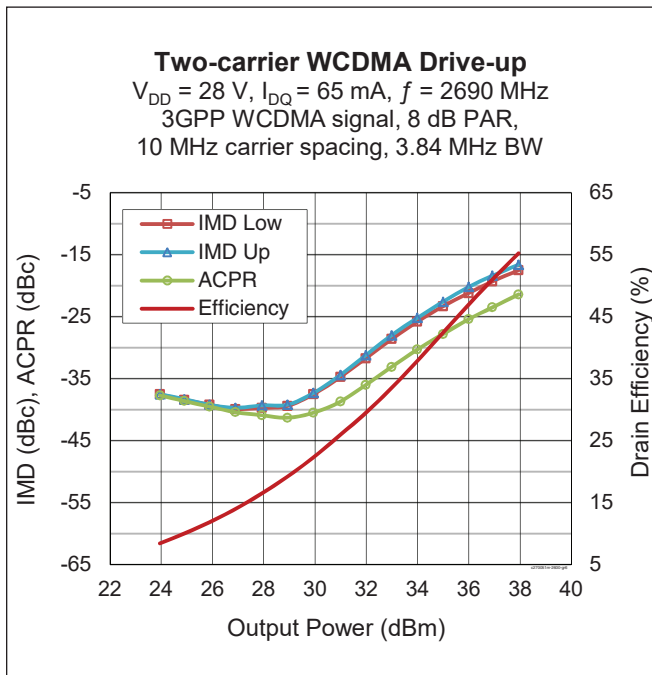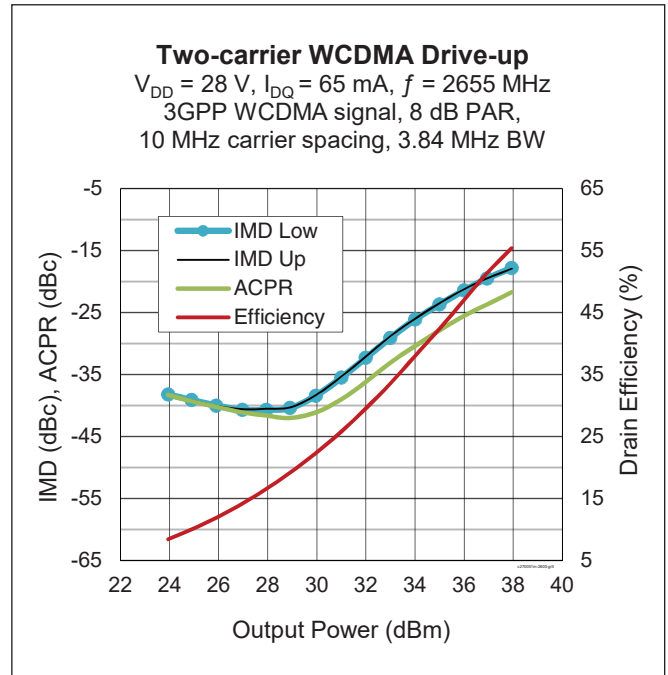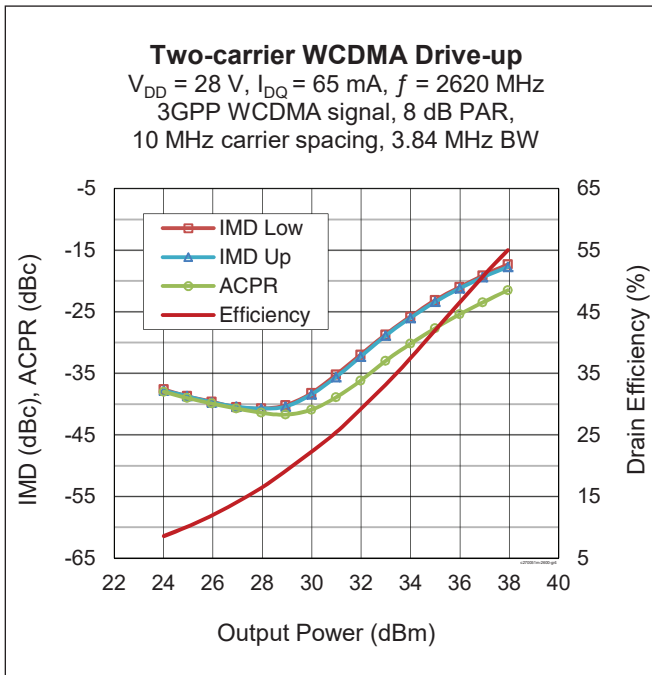


Typical Performance, 2655 MHz (cont.)

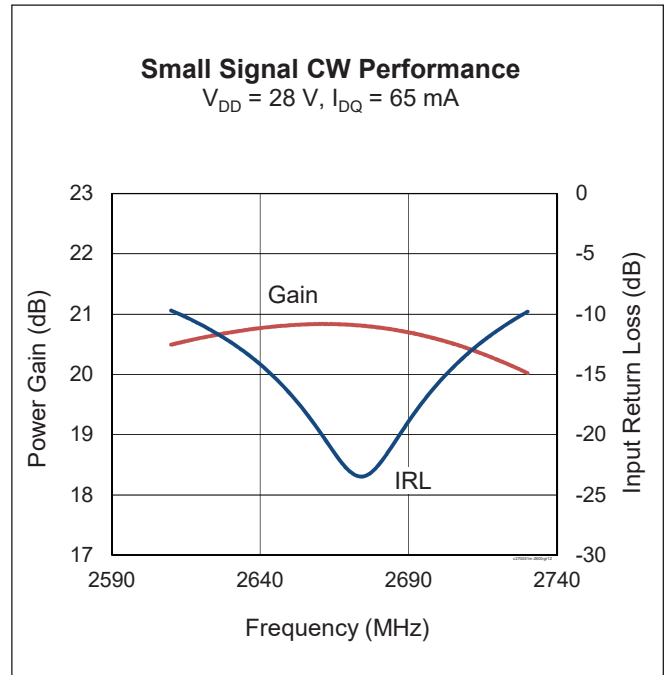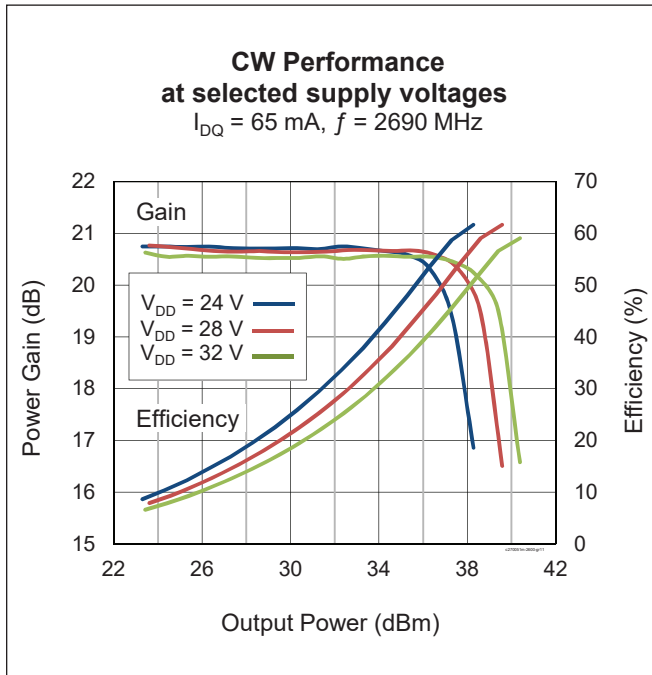

Broadband Circuit Impedance

Freq [MHz]	Z Source Ω		Z Load Ω	
	R	jX	R	jX
2490	1.5	-4.1	7.2	1.5
2590	1.5	-4.6	6.6	0.7
2690	1.5	-5.5	6.3	-0.6

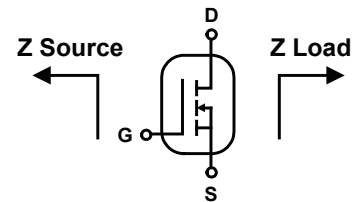


Load Pull Performance

Pulsed CW signal: 160 μsec , 10% duty cycle; 28 V, 65 mA

Class AB		P_{1dB}									
		Max Output Power					Max PAE				
Freq [MHz]	Zs [Ω]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]	Zl [Ω]	Gain [dB]	PAE [%]	POUT [dBm]	POUT [W]
2490	$1.5 - j4.1$	$8.2 + j0.3$	19.7	55.6	39.0	7.94	$6.2 + j2.8$	20.9	62.2	38.4	6.9
2590	$1.5 - j4.6$	$6.9 - j0.8$	18.8	55.6	39.0	7.94	$5.0 + j2.1$	21.0	63.4	37.9	6.2
2690	$1.5 - j5.5$	$7.8 - j2.0$	18.4	55.6	39.0	7.94	$4.9 + j0.8$	20.4	63.6	37.8	6.0

Package Outline Specifications

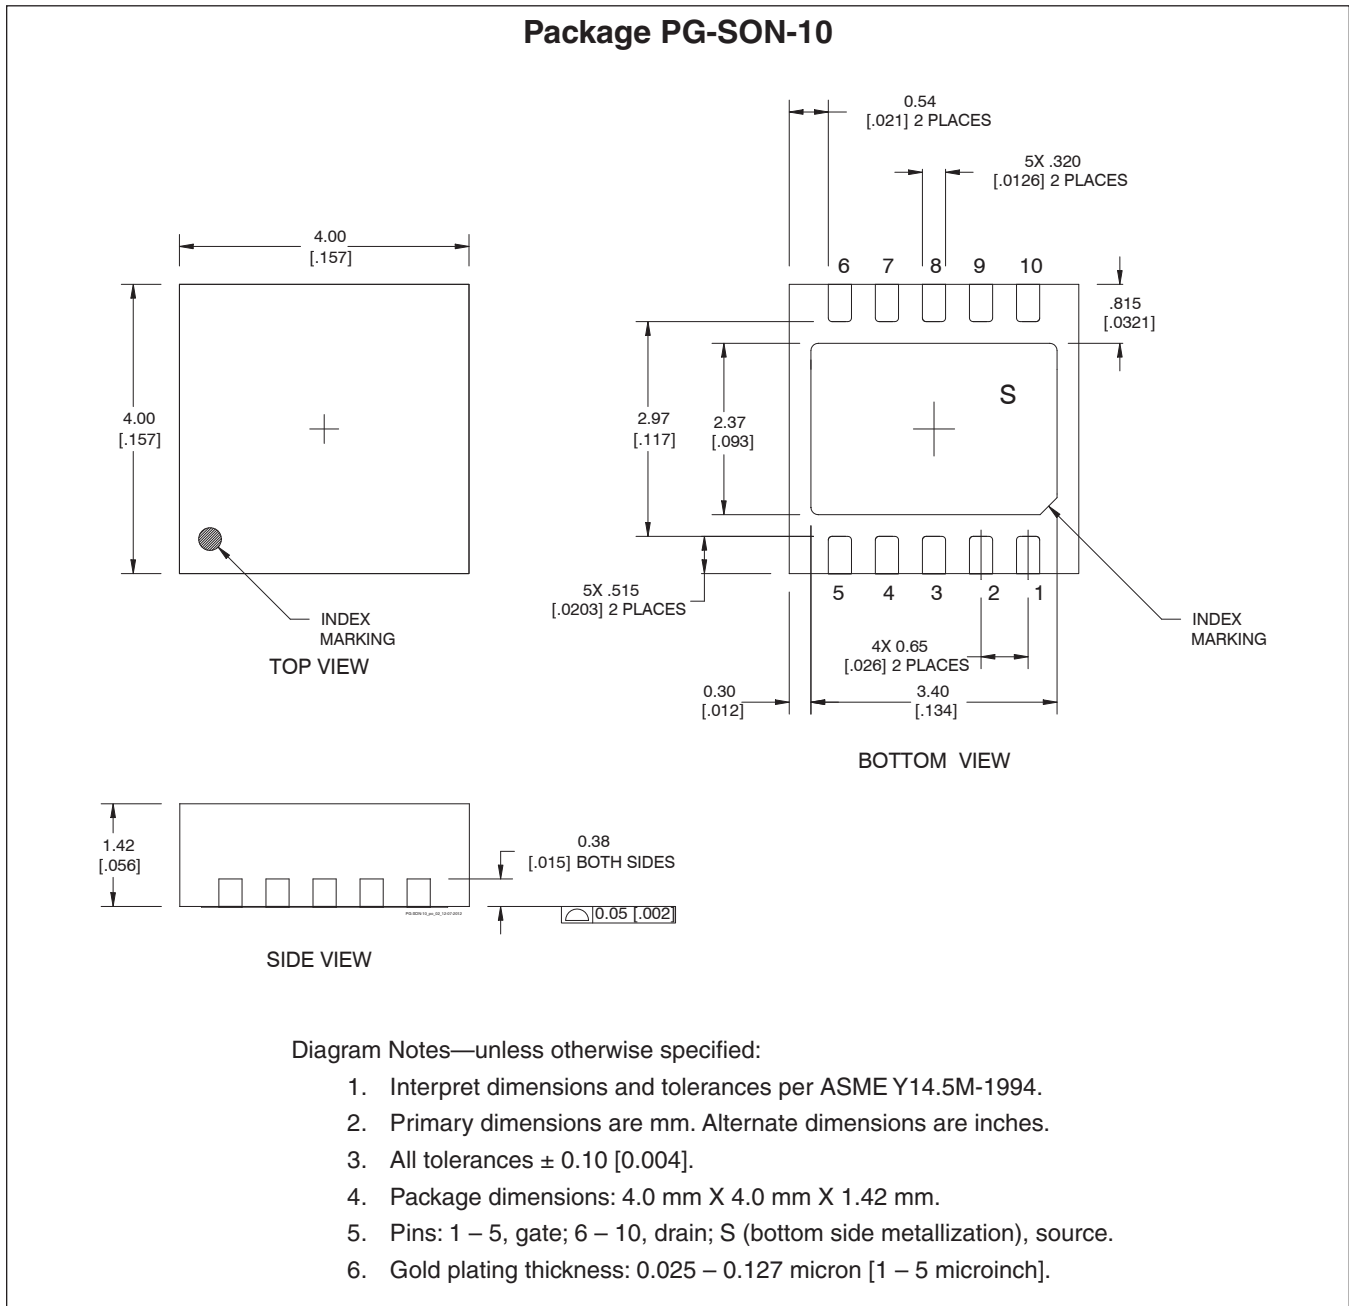

Revision History

Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2015-03-20	Production	All	Specifications and performance represent released product.
01.1	2016-07-26	Production	2	Add ordering information for additional evaluation boards.
02	2018-06-20	Production	All	Converted to Wolfspeed Data Sheet

For more information, please contact:

4600 Silicon Drive
Durham, North Carolina, USA 27703
www.wolfspeed.com/RF

Sales Contact
RFSales@wolfspeed.com

RF Product Marketing Contact
RFMarketing@wolfspeed.com
919.407.7816

Notes

Disclaimer

Specifications are subject to change without notice. Cree, Inc. believes the information contained within this data sheet to be accurate and reliable. However, no responsibility is assumed by Cree for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Cree. Cree makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. "Typical" parameters are the average values expected by Cree in large quantities and are provided for information purposes only. These values can and do vary in different applications and actual performance can vary over time. All operating parameters should be validated by customer's technical experts for each application. Cree products are not designed, intended or authorized for use as components in applications intended for surgical implant into the body or to support or sustain life, in applications in which the failure of the Cree product could result in personal injury or death or in applications for planning, construction, maintenance or direct operation of a nuclear facility.